

DID YOU KNOW?

about our... **TX-CON® ANCHOR SCREWS**



**NEW
PRODUCT**



TX-CON® ANCHOR SCREW - HEX SLOTTED

R1000 HOURS PROTECTIVE COAT



| Part | QFind | Size | Drill Size | Length (mm) | Thread Length (mm) | Drive Size (inch) | Pack Qty |
|--------------|--------|------------|------------|----------------|-----------------------|----------------------|----------|
| | | Ø Dia (mm) | * Ø (mm) | | | | |
| MTXTRHL65032 | MTX110 | 6.5 | 5.0 | 32 | 29 | 5/16" | 100 |
| MTXTRHL65045 | MTX111 | 6.5 | 5.0 | 45 | 41 | 5/16" | 100 |
| MTXTRHL65058 | MTX112 | 6.5 | 5.0 | 58 | 48 | 5/16" | 100 |
| MTXTRHL65070 | MTX113 | 6.5 | 5.0 | 70 | 57 | 5/16" | 100 |
| MTXTRHL65083 | MTX114 | 6.5 | 5.0 | 83 | 57 | 5/16" | 100 |
| MTXTRHL65100 | MTX115 | 6.5 | 5.0 | 100 | 57 | 5/16" | 100 |

R1000 Hours Protective Coating:

- Silver coating R1000 - 1000 hour salt spray rated.
- Ideal for light to medium duty applications into concrete, brick, block.
- Can also be used into wood based materials. No pre-drilling required.

Application:

- Metal door frames, hand rails, lighting fixtures and window installations.




TX-CON® ANCHOR SCREW - CSK PHILLIPS

R1000 HOURS PROTECTIVE COAT



| Part | QFind | Size | Drill Size | Length (mm) | Thread Length (mm) | Drive Size PH | Pack Qty |
|--------------|--------|------------|------------|----------------|-----------------------|------------------|----------|
| | | Ø Dia (mm) | * Ø (mm) | | | | |
| MTXTRCP50032 | MTX101 | 5.0 | 4.0 | 32 | 25 | #2 | 100 |
| MTXTRCP50045 | MTX102 | 5.0 | 4.0 | 45 | 38 | #2 | 100 |
| MTXTRCP50058 | MTX103 | 5.0 | 4.0 | 58 | 48 | #2 | 100 |
| MTXTRCP50070 | MTX104 | 5.0 | 4.0 | 70 | 57 | #2 | 100 |
| MTXTRCP65045 | MTX105 | 6.5 | 5.0 | 45 | 38 | #2 | 100 |
| MTXTRCP65058 | MTX106 | 6.5 | 5.0 | 58 | 48 | #2 | 100 |
| MTXTRCP65070 | MTX107 | 6.5 | 5.0 | 70 | 57 | #2 | 100 |
| MTXTRCP65083 | MTX108 | 6.5 | 5.0 | 83 | 57 | #2 | 100 |
| MTXTRCP65100 | MTX109 | 6.5 | 5.0 | 100 | 57 | #2 | 100 |

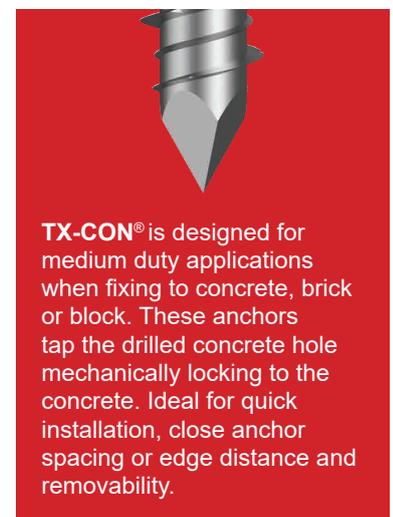

TX-CON® is designed for medium duty applications when fixing to concrete, brick or block. These anchors tap the drilled concrete hole mechanically locking to the concrete. Ideal for quick installation, close anchor spacing or edge distance and removability.



TX-CON® ANCHOR SCREW - LARGE WAFER HEAD

R1000 HOURS PROTECTIVE COAT



| Part | QFind | Size | Drill Size | Length (mm) | Thread Length (mm) | Drive Size TX | Pack Qty |
|--------------|--------|------------|------------|----------------|-----------------------|------------------|----------|
| | | Ø Dia (mm) | * Ø (mm) | | | | |
| MTXSRGO75102 | MTX100 | 7.5 | 6.0 | 102 | 96 | T40 | 100 |

Application:

- Fixing base plate to concrete in timber framed home.

* Pre-drilled hole required for concrete and brick based materials.

1911151DYK

