

DID YOU KNOW?

about our...





**NEW
PRODUCT**


Lifting Bow Shackle Screw Pin

LIFTING BOW SHACKLE SCREW PIN GRADE S / HOT DIP GALVANISED/ AS2741

Part	QFind	WLL (Tonne)	Dimensions						Pack Qty
			D (mm)	W (mm)	L (mm)	E (mm)	B (mm)	d (mm)	
ULSHGSGBD-08	BDS8	0.75	10	13	31	21	21	8	50
ULSHGSGBD-10	BDS10	1.00	11	17	37	25	26	10	25
ULSHGSGBD-11	BDS11	1.50	13	18	43	27	29	11	25
ULSHGSGBD-13	BDS13	2.00	16	21	48	33	33	13	20
ULSHGSGBD-16	BDS16	3.20	19	27	61	40	43	16	5
ULSHGSGBD-19	BDS19	4.70	22	32	72	48	51	19	5
ULSHGSGBD-22	BDS22	6.50	25	37	84	54	58	22	5
ULSHGSGBD-25	BDS25	8.50	29	43	95	60	68	25	4
ULSHGSGBD-29	BDS29	9.50	32	46	108	67	74	29	4
ULSHGSGBD-32	BDS32	12.00	35	52	119	76	83	32	3
ULSHGSGBD-35	BDS35	13.50	38	57	133	84	92	35	3
ULSHGSGBD-38	BDS38	17.00	41	60	146	92	98	38	2
ULSHGSGBD-44	BDS44	25.00	51	73	178	110	127	44	1
ULSHGSGBD-51	BDS51	35.00	57	83	197	127	146	51	1
ULSHGSGBD-63	BDS63	55.00	70	105	267	152	184	63	1

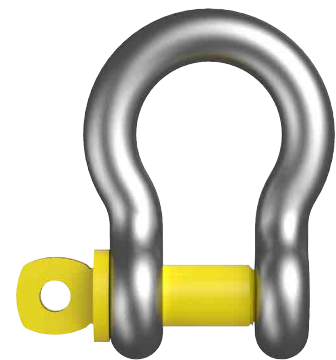

MARKINGS:

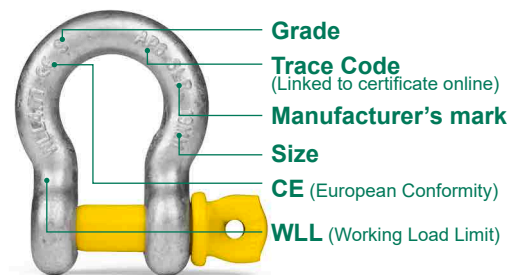

FEATURES

- Approved for lifting
- Screw pin for fast assembly and disassembly

APPLICATIONS

- Links in lifting systems
- Multi sling connections
- Rigging connections
- Vehicle recovery and towing
- Tension structures



Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

