

DID YOU KNOW?

about our...



**NEW
PRODUCT**

Lifting Eye Bolt DIN 580


LIFTING EYE BOLT ZINC PLATED (ROHS COMPLIANT) / DIN 580 / GRADE C15E

Part	QFind	Size	Dimensions (mm)				Working Load WLL (kg)	Pack Qty
		M	H	L	ØID			
ULEBC5ZD5M10	EBCZM10	M10	45	17.0	25	230	50	
ULEBC5ZD5M12	EBCZM12	M12	53	20.5	30	340	25	
ULEBC5ZD5M16	EBCZM16	M16	62	27.0	35	700	25	



FEATURES


- Approved for lifting
- Stamped with working load for axial loading
- Can be used in axial or angular loading



APPLICATIONS

- Connection point for anchoring, rigging, pulling, lifting or hoisting
- Can be used with ropes, cables, shackles and hooks
- Threaded onto steel equipment, machine and structures

MARKINGS:

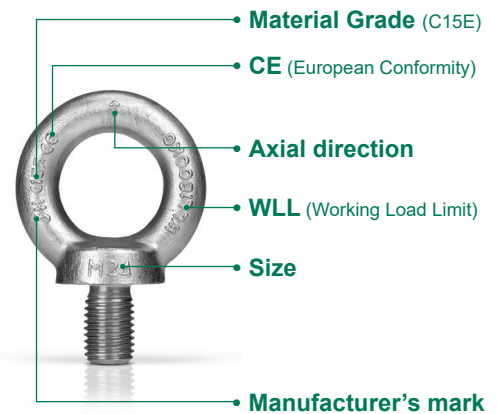

You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

