

DID YOU KNOW?

about our...



**NEW
PRODUCT**

Lifting Eye Bolt DIN 580


LIFTING EYE BOLT HOT DIP GALVANISED / DIN 580 / GRADE C15E

Part	QFind	Size	Dimensions (mm)			Working Load WLL (kg)	Pack Qty
		M	H	L	ØID		
ULEBC5GD5M10	EBCGM10	M10	45	17.0	25	230	50
ULEBC5GD5M12	EBCGM12	M12	53	20.5	30	340	25
ULEBC5GD5M16	EBCGM16	M16	62	27.0	35	700	25
ULEBC5GD5M20	EBCGM20	M20	71	30.0	40	1200	10



FEATURES


- Approved for lifting
- Stamped with working load for axial loading
- Can be used in axial or angular loading



APPLICATIONS

- Connection point for anchoring, rigging, pulling, lifting or hoisting
- Can be used with ropes, cables, shackles and hooks
- Threaded onto steel equipment, machine and structures

MARKINGS:

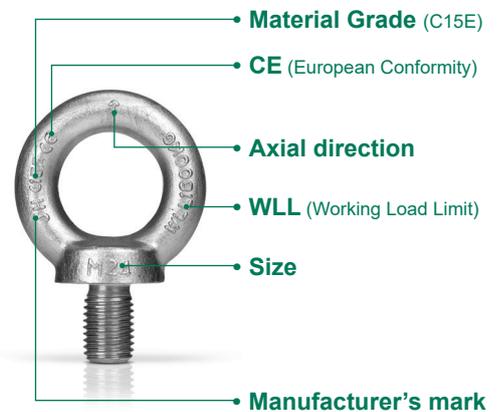

You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

