

DID YOU KNOW?

about our...




**NEW
PRODUCT**

Grade 80 Connecting Link

Connecting links easily connect lifting components to chains and eyes.

CHAIN CONNECTING LINK POWDER COAT / HEC / GRADE 80

Part	Qfind	Size (mm)	WLL (tonne)	BL (tonne)
ULCL08PCL-06	CCL6	6	1.12	4.48
ULCL08PCL-08	CCL8	8	2.00	8.00
ULCL08PCL-10	CCL10	10	3.15	12.60
ULCL08PCL-13	CCL13	13	5.30	21.20
ULCL08PCL-16	CCL16	16	8.00	32.00
ULCL08PCL-18	CCL18	18	10.00	40.00
ULCL08PCL-20	CCL20	20	12.50	50.00
ULCL08PCL-22	CCL22	22	15.00	60.00
ULCL08PCL-26	CCL26	26	21.20	84.80
ULCL08PCL-32	CCL32	32	31.50	126.00

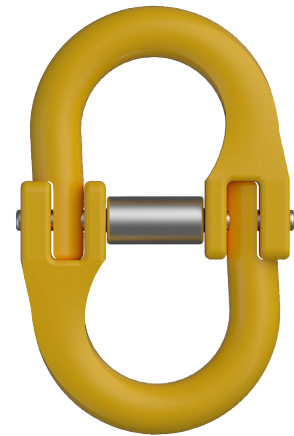

MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with chains and synthetic slings

FEATURES

- Conforms to AS 3776
- Fatigue tested at 1.5 WLL for 20,000 cycles
- 100% magnaflux crack detection



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

