

DID YOU KNOW?

about our...



**NEW
PRODUCT**

Strut Channel Nut Short Spring

STRUT CHANNEL NUT SHORT SPRING 316 STAINLESS / HEC

Part	Diameter	A (mm)	B (mm)	C (mm)	L (mm)	d2 (mm)
NS16PSSCM10	M10	19	34.5	9.2	19	18
NS16PSSCM12	M12	19	34.5	12.0	19	18




FEATURES

- Easy install and precise placement
- Spring holds the nut securely in place, acting as a 'third hand'
- Freedom to adjust positioning
- Serrated grooves on the top face prevent unwanted movement or rotation

APPLICATIONS

- Securing cable trays and ladders onto channel (strut)
- Using an angle fitting to make a right-angle connection between two lengths of channel
- Fixing of channel supports to strut
- Shallow channel sections (41x21mm channel)

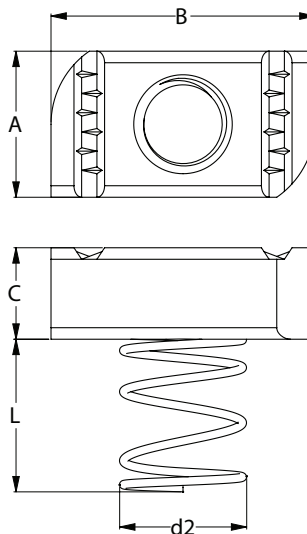

You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935



2312191DYK