

DID YOU KNOW?

about our...



**NEW
PRODUCT**

XBolt® PRO Vertical Hanger

XBOLT® PRO VERTICAL HANGER

ZINC PLATED (RoHS COMPLIANT) / ETA OPT 1 / C1 FR / AS 5216




Opt 1



C1



Fire Rated

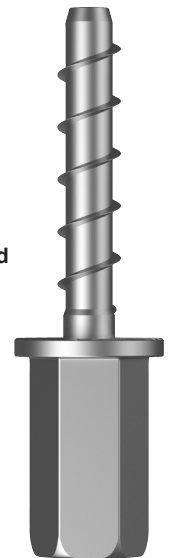


Part	Qfind	Diameter		Thread Length		Embedment Length	Head Height	Drive Size
		D	T1 (mm)	T2 (mm)	L (mm)			
EVMXSZ17M100040	EVX103	M08/M10	10	10	40	26	13	
EVMXSZ17M100055	EVX100	M08/M10	10	10	55	26	13	

APPLICATIONS

- Mechanical and electrical applications
- Pipe and ceiling hangers
- HVAC
- Fire sprinklers
- Cable trays
- Suspension of mechanical services
- Suitable for cracked and non-cracked concrete

FEATURES



- Suitable for light to medium-duty loads
- Suitable for small anchor spacing and edge distance applications
- Quick and easy to install
- Fully removable
- Dual thread nut M8 and M10
- ETA approval — Option 1
- Fire rated
- Seismic certified (C1)




Cracked Concrete



Non-cracked Concrete

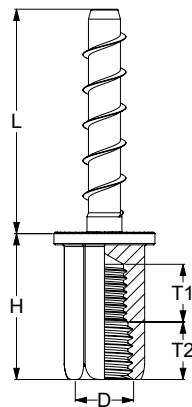

Dual Thread Nut



CONSTRUCT PRO

XBolt PRO

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



240116DYK