

# DID YOU KNOW?


about our...



**NEW  
PRODUCT**

## Metal SDS Flanged Hex Head


### METAL SDS FLANGED HEX HEAD CLASS 4 / AS3566 / SCRATCHGUARD®

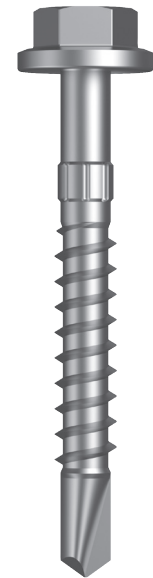

Part	QFind	Gauge	TPI	Length	Thread Length	Drill Point Length	Head Height	Head Ø	Drive Size
				L (mm)	T (mm)	DP (mm)	H (mm)	D (mm)	AF (mm)
T9PM4FS1410050	QA76	14	10	50	25	10	6.2	15	HEX 3/8
T9PM4FS1410075	QA77	14	10	75	40	10	6.2	15	HEX 3/8

#### APPLICATIONS


- Metal-to-metal fixing
- Wall cladding
- Fencing and gates
- Signage
- Hinges into metal posts, gates and doors



**Scratchguard®**

#### FEATURES

- Scratchguard® improves corrosion resistance by protecting the fastener shank from scratching
- Scratchguard® removes burr from drilled holes
- Class 4 coating suitable for external use
- Unthreaded shank increases clamp load between substrate and held material

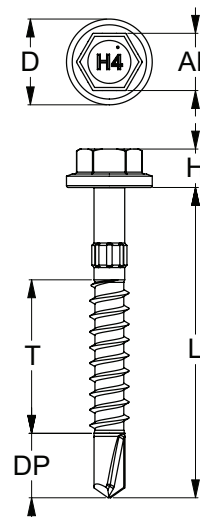

# DRILLX®

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**



240205DYK