

DID YOU KNOW?

about our...



**NEW
PRODUCT**

Rivet Dome Head Open

RIVET DOME HEAD OPEN COPPER / 73CS - COPPER / STEEL ZP



Part	Size	Shell Diameter	Grip Range		Body Length	Head Diameter
		D (mm)	Min	Max	L (mm)	H (mm)
R9P73OCS402	42	3.2	1.7	3.2	7.0	6.4
R9P73OCS403	43	3.2	3.3	4.8	8.6	6.4
R9P73OCS404	44	3.2	4.9	6.4	10.2	6.4

APPLICATIONS

- Copper roofing and flashing
- Decorative applications

FEATURES

- Corrosion-resistant copper head
- Higher tensile and shear values than aluminium rivets

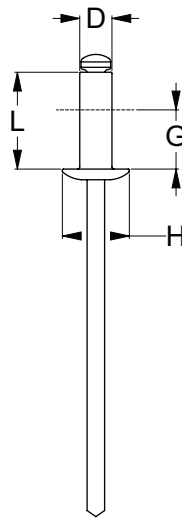

DRILLX®



You can download this
Test Certificate and/or
Report from our website:
hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935



2402121DYK