

# DID YOU KNOW?

about our...




**NEW  
PRODUCT**

## ERM Dual Slot Self-Lock Nut with Free-Spinning Washer

### ERM DUAL SLOT SELF-LOCK NUT WITH FREE-SPINNING WASHER ZINC & TOP COAT / CL8 / LANFRANCO

Part	Qfind	Nominal Size	Washer Diameter	Washer Thickness	Overall Height	Nut Height	Across Flats	Across Corners
		D <sup>1</sup> (mm)	D <sup>2</sup> (mm)	T (mm)	H (mm)	M (mm)	S (mm)	E (mm)
NJ08TERMM08	ERM080125QVZJ	M8	22	1.25	11.8	4.9	13	14.38
NJ08TERMM10	ERM100150QVZJ	M10	27	1.50	14.8	6.3	16	17.77
NJ08TERMM12	ERM120175QVZJ	M12	27	1.75	16.5	7.4	18	20.03
NJ08TERMM16	ERM160200QVZJ	M16	40	2.00	22.1	9.7	24	26.75




#### FEATURES

- Extremely reliable
- Consistent prevailing torque
- Locking slots are independent of bolt tension
- All metal is reusable
- Dual-slotted self-locking hexagon
- Captive free-spinning disc spring maintains tension in joint under dynamic loads

#### APPLICATIONS

- Mining and processing
- Railway and transportation
- Energy
- Military
- Industrial

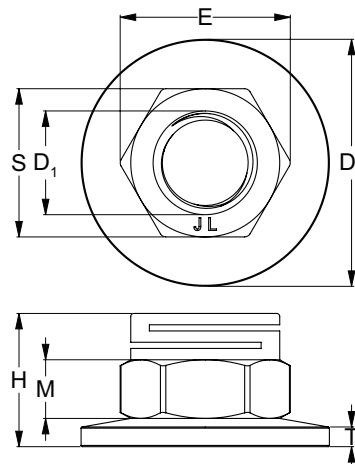

**J. LANFRANCO**  
LOCKNUTS FOR CRITICAL BOLTED JOINTS



You can download this  
Test Certificate and/or  
Report from our website:

**[hobson.com.au](http://hobson.com.au)**

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

**[hobson.com.au](http://hobson.com.au) QUALITY FASTENERS SINCE 1935**



240411DYK