

DID YOU KNOW?

about our...



**MORE
SIZES +**

XBolt PRO® — Hex Flange

XBOLT PRO® — HEX FLANGE

ZINC PLATED (RoHS Compliant) / ETA OPT 1 / C1 FR / AS 5216

Part	Qfind	Diameter	Across Flats	Length	Thread Length
			AF (mm)	L (mm)	TL (mm)
EXHMSZ17M060045	EXH137	M6	10	45	40
EXHMSZ17M060060	EXH134	M6	10	60	40


**NEW
SIZES +**


APPLICATIONS

- Suitable for medium to heavy loads
- Small anchor spacing and edge distance applications

FEATURES

- Quick and easy to install
- Fully removable
- Approved to AS 5216
- Option 1 ETA approved for cracked and non-cracked concrete
- C1 seismic rated
- Fire rated to 120 minutes

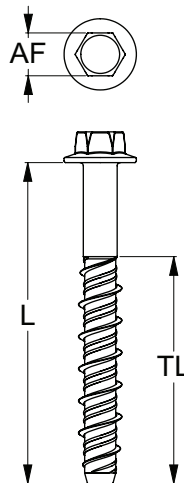


Non-cracked
Concrete




Opt 1




C1




Fire Rated



Cracked
Concrete

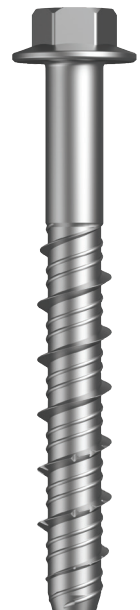

Click on this icon
and download ETA
from Documents list at
hobson.com.au

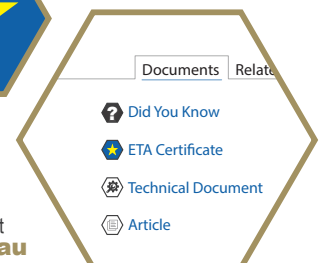

CONSTRUCT PRO
XBolt PRO

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



240506DYK