

DID YOU KNOW?

about our...



MORE SIZES +

XBolt PRO® — Hex Flange

XBOLT PRO® — HEX FLANGE
R1000 HOURS PROTECTIVE COAT / ETA OPT 1 / C1 C2 FR / AS 5216



Opt 1



C1 & C2



Fire Rated



Cracked Concrete



Non-cracked Concrete




Part	Diameter	Across Flats	Length	Thread Length	Embedment Depth
		AF (mm)	L (mm)	TL (mm)	hnom
EXHMSR18M080~	M8	13	65–150	60	50/60
EXHMSR18M100~	M10	15	100–200	70	60/70/85
EXHMSR18M120~	M12	16	110–150	85	75/105
EXHMSR18M140~	M14	18	115–160	110	75/110

NEW SIZES +

APPLICATIONS

- Suitable for medium to heavy loads
- Small anchor spacing and edge distance applications
- Non-expanding anchor for reduced spacing and edge distance
- Instant loading

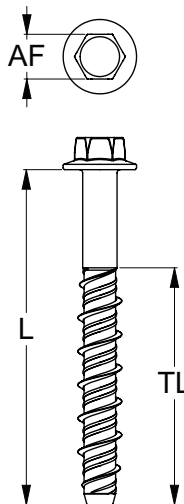

FEATURES

- Multiple embedment lengths
- AS 5216 compliant
- Dual thread for ease of installation
- C1 and C2 seismic rated
- Ruspert® 1000 hours coating

CONSTRUCT PRO
XBolt PRO

Click on this icon and download ETA from Documents list at hobson.com.au

Documents | Related

- 🔍 Did You Know
- 📄 ETA Certificate
- 📄 Technical Document
- 📄 Article

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



2406241DYK