

DID YOU KNOW?

about our...



NEW
PRODUCT

S500 SDS Hex Head and Washer

S500 SDS HEX HEAD AND WASHER CLASS 4 / AS 3566




Part	QFind	Length	TPI	Thread Length	Drill Point Length	Head Height	Head Ø	Drive Size
		L (mm)		TL (mm)	DP (mm)	H (mm)	D (mm)	AF (inch)
T9P54SH1224032	Q486	32	24	17	15	6	14	HEX 5/6"
T9P54SH1224050	Q488	50	24	35	15	6	14	HEX 5/6"
T9P54SH1224065	Q490	65	24	50	15	6	14	HEX 5/6"
T9P54SH1224085	Q489	85	24	70	15	6	14	HEX 5/6"

APPLICATIONS

- Metal-to-metal fixing
- Thick steel purlins and hot rolled steel
- Roofing and walling sheets to hot rolled steel

FEATURES

- Extended drill point and fine pitch (24 TPI) thread allows self-drilling in metal up to 12 mm in thickness
- No pre-drilling required
- Corrosion resistance to Class 4 as per AS 3566.2

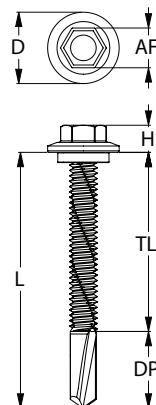

DRILLIX®

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

