

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Grade 80 Hook Range



Grab Hook with Clevis
ULHK08PGE



Safety Hook with Clevis
ULHK08PSE



Safety Hook with Swivel
ULHK08PSS



Sling Hook with Eye
ULHK08PLE



Latch Hook with Swivel
ULHK08PAS



Sling Hook with Clevis
ULHK08PLC



Safety Hook with Clevis
ULHK08PSC



Grab Hook with Eye
ULHK08PGC

POWDER COAT / HEC / GRADE 80

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



Page 1 of 9

250909DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Grade 80 Eye Grab Hook

Clevis grab hook with support lug for easy connection to lifting slings as well as back hooking for adjustable chain slings.

GRAB HOOK WITH EYE POWDER COAT / HEC / GRADE 80

Part	QFind	Size	WLL	BL
		(mm)	(tonne)	(tonne)
ULHK08PGE-06	HGE6	6	1.12	4.48
ULHK08PGE-08	HGE8	8	2.00	8.00
ULHK08PGE-10	HGE10	10	3.15	12.60
ULHK08PGE-13	HGE13	13	5.30	21.20
ULHK08PGE-16	HGE16	16	8.00	32.00
ULHK08PGE-20	HGE20	20	12.50	50.00

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with chains and synthetic slings

FEATURES

- Conforms to AS 3776
- Fatigue tested at 1.5 WLL for 20,000 cycles
- 100% magnaflux crack detection
- Ability to shorten lengths of chain sling hooking
- Can be used for back hooking



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

Page 2 of 9



250909DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Grade 80 Eye Safety Hook

Eye safety hook locks when a load is applied to prevent the release of chains and lifting slings.

SAFETY HOOK WITH EYE POWDER COAT / HEC / GRADE 80

Part	QFind	Size	WLL	BL
		(mm)	(tonne)	(tonne)
ULHK08PSE-06	HSE6	6	1.12	4.48
ULHK08PSE-08	HSE8	8	2.00	8.00
ULHK08PSE-10	HSE10	10	3.15	12.60
ULHK08PSE-13	HSE13	13	5.30	21.20
ULHK08PSE-16	HSE16	16	8.00	32.00

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with chains and synthetic slings

FEATURES

- Conforms to AS 3776
- 100% magnaflux crack detection
- Safety hook prevents components from releasing if line becomes slack
- Back lever releases hook



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

Page 3 of 9



250909DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Grade 80 Swivel Safety Hook

Safety hook locks while swivel action assists with aligning the load prior to lifting.

SWIVEL SAFETY HOOK POWDER COAT / HEC / GRADE 80

Part	QFind	Size	WLL	BL
		(mm)	(tonne)	(tonne)
ULHK08PSS-06	HSS6	6	1.12	4.48
ULHK08PSS-08	HSS8	8	2.00	8.00
ULHK08PSS-10	HSS10	10	3.15	12.60
ULHK08PSS-13	HSS13	13	5.30	21.20
ULHK08PSS-16	HSS16	16	8.00	32.00

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with chains and synthetic slings

FEATURES

- Conforms to AS 3776
- 100% magnaflux crack detection
- 360° swivel motion
- Safety hook prevents components from releasing when being lifted



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

Page 4 of 9



250909DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Grade 80 Eye Sling Hook

Eye sling hook with self-closing latch can connect with coupler links or other lifting components.

EYE SLING HOOK POWDER COAT / HEC / GRADE 80

Part	QFind	Size	WLL	BL
		(mm)	(tonne)	(tonne)
ULHK08PLE-06	HLE6	6	1.12	4.48
ULHK08PLE-08	HLE8	8	2.00	8.00
ULHK08PLE-10	HLE10	10	3.15	12.60
ULHK08PLE-13	HLE13	13	5.30	21.20
ULHK08PLE-16	HLE16	16	8.00	32.00
ULHK08PLE-20	HLE20	20	12.50	50.00

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with chains and synthetic slings

FEATURES

- Conforms to AS 3776
- Fatigue tested at 1.5 WLL for 20,000 cycles
- 100% magnaflux crack detection
- Safety hook prevents components from releasing



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935



Page 5 of 9

250909DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Grade 80 Latch Hook with Swivel

Self-locking latch hook with swivel action assists with aligning the hook to the load prior to lifting.

LATCH HOOK WITH SWIVEL POWDER COAT / HEC / GRADE 80

Part	QFind	Size	WLL	BL
		(mm)	(tonne)	(tonne)
ULHK08PAS-06	HAS6	6	1.12	4.48
ULHK08PAS-08	HAS8	8	2.00	8.00
ULHK08PAS-10	HAS10	10	3.15	12.60
ULHK08PAS-13	HAS13	13	5.30	21.20
ULHK08PAS-16	HAS16	16	8.00	32.00

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with chains, wire ropes and synthetic slings

FEATURES

- Conforms to AS 3776
- 100% magnaflux crack detection
- Safety hook prevents components from releasing if line becomes slack
- 360° swivel motion



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

Page 6 of 9



250909DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Grade 80 Clevis Sling Hook

Self-locking clevis sling hook enables efficient and effective connection to lifting slings.

CLEVIS SLING HOOK POWDER COAT / HEC / GRADE 80

Part	QFind	Size	WLL	BL
		(mm)	(tonne)	(tonne)
ULHK08PLC-06	HLC6	6	1.12	4.48
ULHK08PLC-08	HLC8	8	2.00	8.00
ULHK08PLC-10	HLC10	10	3.15	12.60
ULHK08PLC-13	HLC13	13	5.30	21.20
ULHK08PLC-16	HLC16	16	8.00	32.00
ULHK08PLC-20	HLC20	20	12.50	50.00

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with chains and synthetic slings

FEATURES

- Conforms to AS 3776
- 100% magnaflux crack detection
- Safety hook prevents components from releasing if line becomes slack



MARKINGS

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**
- **Size**



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

Page 7 of 9



250909DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Grade 80 Clevis Safety Hook

Clevis safety hook locks when a load is applied to prevent the release of lifting slings.

CLEVIS SAFETY HOOK POWDER COAT / HEC / GRADE 80

Part	QFind	Size	WLL	BL
		(mm)	(tonne)	(tonne)
ULHK08PSC-06	HSC6	6	1.12	4.48
ULHK08PSC-08	HSC8	8	2.00	8.00
ULHK08PSC-10	HSC10	10	3.15	12.60
ULHK08PSC-13	HSC13	13	5.30	21.20
ULHK08PSC-16	HSC16	16	8.00	32.00
ULHK08PSC-20	HSC20	20	12.50	50.00

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with chains and synthetic slings
- Clevis fitting for direct connection to chain

FEATURES

- Conforms to AS 3776
- 100% magnaflux crack detection
- Safety hook prevents components from releasing when being lifted
- Back lever releases hook



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

Page 8 of 9



250909DYK

DID YOU KNOW?

about our...




**SPOT
LIGHT**

Grade 80 Clevis Grab Hook

Clevis grab hook with support lug allows for easy connection to lifting slings and back hooking for adjustable chain slings.

GRAB HOOK WITH CLEVIS POWDER COAT / HEC / GRADE 80

Part	QFind	Size	WLL	BL
		(mm)	(tonne)	(tonne)
ULHK08PGC-06	HGC6	6	1.12	4.48
ULHK08PGC-08	HGC8	8	2.00	8.00
ULHK08PGC-10	HGC10	10	3.15	42.60
ULHK08PGC-13	HGC13	13	5.30	21.20
ULHK08PGC-16	HGC16	16	8.00	32.00
ULHK08PGC-20	HGC20	20	12.50	50.00

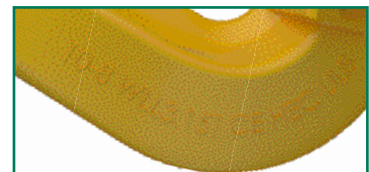

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with chains and synthetic slings
- Clevis connection for direct attachment to chain

FEATURES

- Individually proof tested at 2.5 WLL
- Fatigue tested at 1.5 WLL for 20,000 cycles
- 100% magnaflux crack detection
- Grab hooks provide the ability to shorten lengths of chain slings hooking
- Can be used for back hooking

MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935



Page 9 of 9

250909DYK