

DID YOU KNOW?

about our...




**SPOT
LIGHT**

Strut Channel Nut Range




NSMSGCNCM
NSMSZCNCM




NSMSGNSCM
NSMSZNSCM


316



NS16PNSCM




NSMSGSSCM
NSMSZSSCM



NSMSGSLCM
NSMSZSLCM

316



NS16PSLCM



Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS** SINCE 1935



Page 1 of 11

251022DYK

DID YOU KNOW?

about our...




**SPOT
LIGHT**

Strut Channel Nut Narrow – HDG

STRUT CHANNEL NUT NARROW HOT DIP GALVANISED / HEC

Part	Size	Width	Length	Thickness
		A (mm)	B (mm)	C (mm)
NSMSGCNCM06	M6	13.5	35	3




APPLICATIONS

- Secures items to all sections of channels
- Ideal when channel nuts are too wide for the application
- Light duty, used with metal threads
- Plumbing and electrical applications

FEATURES

- No spring to suit all channel sections
- Also known as a butterfly nut
- Low-profile design
- Ease of installation

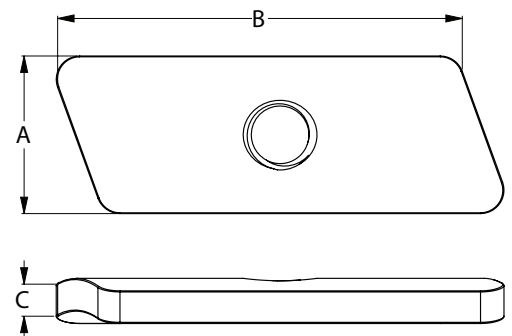

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



Page 2 of 11

251022DYK

DID YOU KNOW?

about our...




**SPOT
LIGHT**

Strut Channel Nut Narrow – Z/P

STRUT CHANNEL NUT NARROW ZINC PLATED (RoHS COMPLIANT) / HEC

Part	Size	Width	Length	Thickness
		A (mm)	B (mm)	C (mm)
NSMSZCNCM06	M6	13.5	35	3




APPLICATIONS

- Secures items to all sections of channels
- Ideal when channel nuts are too wide for the application
- Zinc plated for indoor use
- Light duty, used with metal threads
- Plumbing and electrical applications

FEATURES

- No spring to suit all channel sections
- Also known as a butterfly nut
- Low-profile design
- Ease of installation

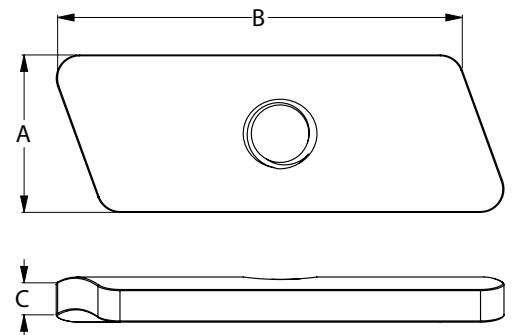

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



Page 3 of 11

251022DYK

DID YOU KNOW?

about our...






**SPOT
LIGHT**

Strut Channel Nut No Spring – HDG

STRUT CHANNEL NUT NO SPRING HOT DIP GALVANISED / HEC

Part	Diameter	Width	Length	Thickness
		A (mm)	B (mm)	C (mm)
NSMSGNSCM06	M6	19	34.5	5.9
NSMSGNSCM08	M8	19	34.5	8.0
NSMSGNSCM10	M10	19	34.5	9.2
NSMSGNSCM12	M12	19	34.5	11.8
NSMSGNSCM16	M16	19	34.5	12.0

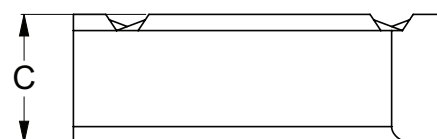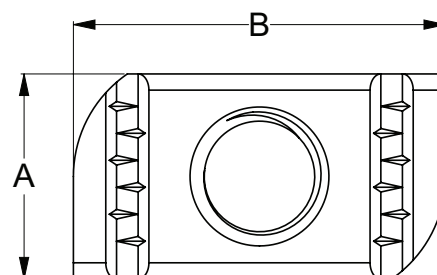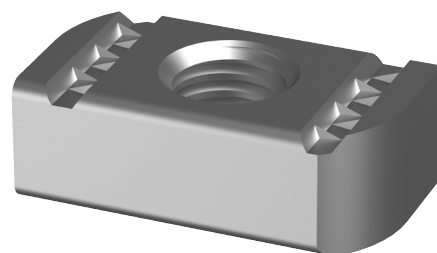

APPLICATIONS

- Securing cable trays and ladders onto channel (strut)
- Using an angle fitting to make a right-angle connection between two lengths of channel
- Fixing of channel supports to strut
- Applications where the nut does not need to be held in place
- Suitable for placing inside the channel, both for the fixing of channel accessories or brackets to it
- Fits all channel heights

FEATURES

- Easy install and precise placement
- Freedom to adjust positioning
- Serrated grooves on the top face prevent unwanted movement or rotation

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

Page 4 of 11



251022DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Strut Channel Nut No Spring

STRUT CHANNEL NUT NO SPRING 316 STAINLESS / HEC

Part	Diameter	Width	Length	Thickness
		A (mm)	B (mm)	C (mm)
NS16PNSCM10	M10	19	34.5	9.2
NS16PNSCM12	M12	19	34.5	12.0




APPLICATIONS

- Securing cable trays and ladders onto channel (strut)
- Using an angle fitting to make a right-angle connection between two lengths of channel
- Fixing of channel supports to strut
- Applications where the nut does not need to be held in place
- Suitable for placing inside the channel, both for the fixing of channel accessories or brackets to it
- Fits all channel heights

FEATURES

- Easy install and precise placement
- Freedom to adjust positioning
- Serrated grooves on the top face prevent unwanted movement or rotation

316

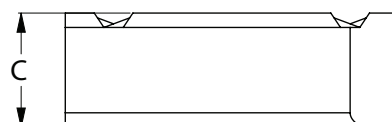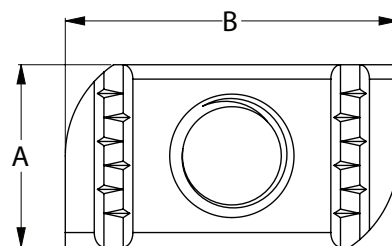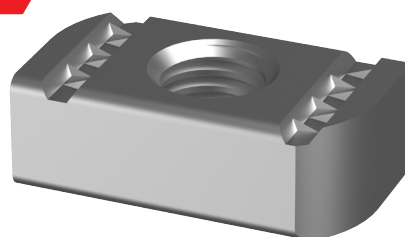

You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

Page 5 of 11



251022DYK

DID YOU KNOW?

about our...






**SPOT
LIGHT**

Strut Channel Nut No Spring – Z/P

STRUT CHANNEL NUT NO SPRING ZINC PLATED (ROHS COMPLIANT) / HEC

Part	Diameter	Width	Length	Thickness
		A (mm)	B (mm)	C (mm)
NSMSZNSCM06	M6	19	34.5	6.0
NSMSZNSCM08	M8	19	34.5	8.0
NSMSZNSCM10	M10	19	34.5	9.2
NSMSZNSCM12	M12	19	34.5	12.0
NSMSZNSCM16	M16	29	34.5	11.0

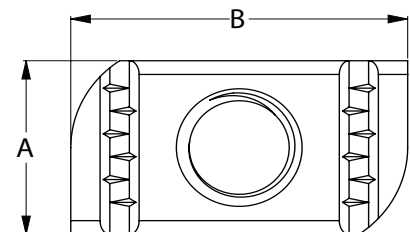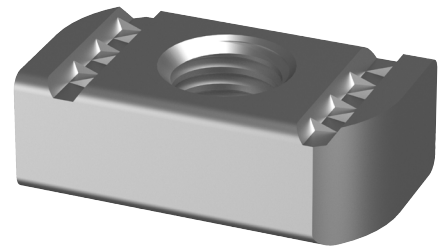

APPLICATIONS

- Securing cable trays and ladders onto channel (strut)
- Using an angle fitting to make a right-angle connection between two lengths of channel
- Fixing of channel supports to strut
- Applications where the nut does not need to be held in place
- Suitable for placing inside the channel, both for the fixing of channel accessories or brackets to it
- Fits all channel heights

FEATURES

- Easy install and precise placement
- Freedom to adjust positioning
- Serrated grooves on the top face prevent unwanted movement or rotation

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

Page 6 of 11



251022DYK

DID YOU KNOW?

about our...




**SPOT
LIGHT**

Strut Channel Nut Short Spring – HDG

STRUT CHANNEL NUT SHORT SPRING HOT DIP GALVANISED / HEC

Part	Diameter	A	B	C	L	d2
		(mm)	(mm)	(mm)	(mm)	(mm)
NSMSGSSCM06	M6	19	34.5	6.0	19	18
NSMSGSSCM08	M8	19	34.5	8.0	19	18
NSMSGSSCM10	M10	19	34.5	9.2	19	18
NSMSGSSCM12	M11	19	34.5	12.0	19	18
NSMSGSSCM16	M12	29	34.5	11.0	19	18

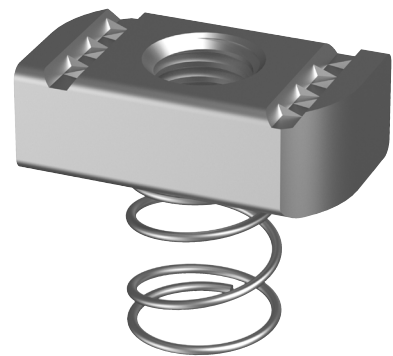


APPLICATIONS

- Securing cable trays and ladders onto channel (strut)
- Using an angle fitting to make a right-angle connection between two lengths of channel
- Fixing of channel supports to strut
- Shallow channel sections (41x21mm channel)

FEATURES

- Easy install and precise placement
- Spring holds the nut securely in place, acting as a 'third hand'
- Freedom to adjust positioning
- Serrated grooves on the top face prevent unwanted movement or rotation

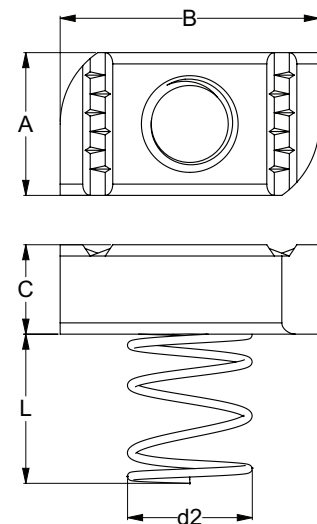

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



Page 7 of 11

251022DYK

DID YOU KNOW?

about our...




**SPOT
LIGHT**

Strut Channel Nut Short Spring – Z/P

STRUT CHANNEL NUT SHORT SPRING ZINC PLATED (ROHS COMPLIANT) / HEC

Part	Diameter	A	B	C	L	d2
		(mm)	(mm)	(mm)	(mm)	(mm)
NSMSZSSCM06	M6	19	34.5	6.0	19	18
NSMSZSSCM08	M8	19	34.5	8.0	19	18
NSMSZSSCM10	M10	19	34.5	9.2	19	18
NSMSZSSCM12	M12	19	34.5	12.0	19	18
NSMSZSSCM16	M16	29	34.5	11.0	19	18

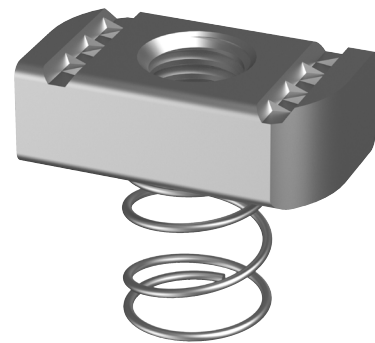


APPLICATIONS

- Securing cable trays and ladders onto channel (strut)
- Using an angle fitting to make a right-angle connection between two lengths of channel
- Fixing of channel supports to strut
- Shallow channel sections (41x21mm channel)

FEATURES

- Easy install and precise placement
- Spring holds the nut securely in place, acting as a 'third hand'
- Freedom to adjust positioning
- Serrated grooves on the top face prevent unwanted movement or rotation

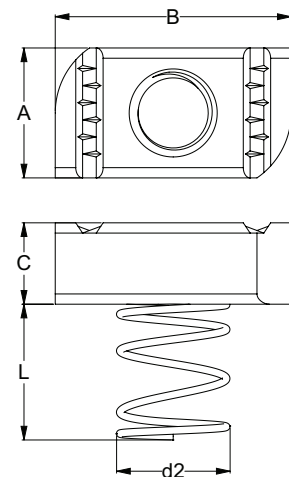

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

Page 8 of 11



251022DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Strut Channel Nut Long Spring – HDG

STRUT CHANNEL NUT LONG SPRING HOT DIP GALVANISED / HEC

Part	Diameter	A	B	C	L	d2
		(mm)	(mm)	(mm)	(mm)	(mm)
NSMSGSLCM06	M6	19	34.5	6.0	38	18
NSMSGSLCM08	M8	19	34.5	8.0	38	18
NSMSGSLCM10	M10	19	34.5	9.2	38	18
NSMSGSLCM12	M12	19	34.5	12.0	38	18
NSMSGSLCM16	M16	29	34.5	11.0	38	18




APPLICATIONS

- Securing cable trays and ladders onto channel (strut)
- Using an angle fitting to make a right-angle connection between two lengths of channel
- Fixing of channel supports to strut
- Deep channel sections (41x41mm channel)

FEATURES

- Easy install and precise placement
- Spring holds the nut securely in place, acting as a 'third hand'
- Freedom to adjust positioning
- Serrated grooves on the top face prevent unwanted movement or rotation

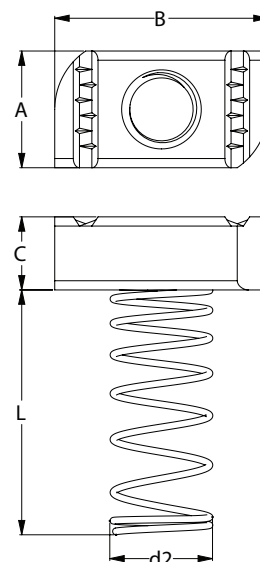

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

Page 9 of 11



251022DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Strut Channel Nut Long Spring – Z/P

STRUT CHANNEL NUT LONG SPRING ZINC PLATED (ROHS COMPLIANT) / HEC

Part	Diameter	A	B	C	L	d2
		(mm)	(mm)	(mm)	(mm)	(mm)
NSMSZSLCM06	M6	19	34.5	6.0	38	18
NSMSZSLCM08	M8	19	34.5	8.0	38	18
NSMSZSLCM10	M10	19	34.5	9.2	38	18
NSMSZSLCM12	M12	19	34.5	12.0	38	18
NSMSZSLCM16	M16	29	34.5	11.0	38	18




APPLICATIONS

- Securing cable trays and ladders onto channel (strut)
- Using an angle fitting to make a right-angle connection between two lengths of channel
- Fixing of channel supports to strut
- Deep channel sections (41x41mm channel)

FEATURES

- Easy install and precise placement
- Spring holds the nut securely in place, acting as a 'third hand'
- Freedom to adjust positioning
- Serrated grooves on the top face prevent unwanted movement or rotation

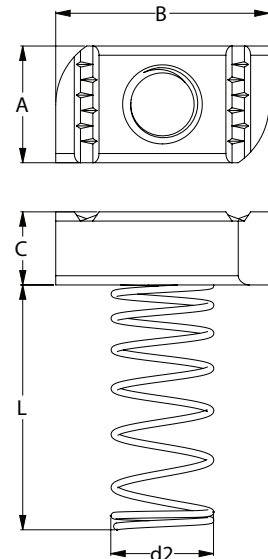

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



Page 10 of 11

251022DYK

DID YOU KNOW?

about our...



**SPOT
LIGHT**

Strut Channel Nut Long Spring

STRUT CHANNEL NUT LONG SPRING 316 STAINLESS / HEC



Part	Diameter	A	B	C	L	d2
		(mm)	(mm)	(mm)	(mm)	(mm)
NS16PSLCM10	M10	19	34.5	9.2	38	18
NS16PSLCM12	M12	19	34.5	12.0	40	18

APPLICATIONS

- Securing cable trays and ladders onto channel (strut)
- Using an angle fitting to make a right-angle connection between two lengths of channel
- Fixing of channel supports to strut
- Deep channel sections (41x41mm channel)

FEATURES

- Easy install and precise placement
- Spring holds the nut securely in place, acting as a 'third hand'
- Freedom to adjust positioning
- Serrated grooved edges prevent unwanted movement or rotation

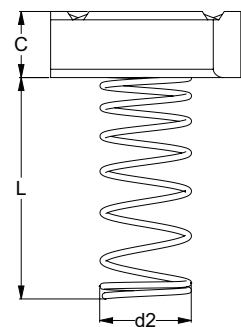

You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935



Page 11 of 11

251022DYK