

DID YOU KNOW?

about our...




MORE
SIZES +

Hex Coach Screw

HEX COACH SCREW HOT DIP GALVANISED / AS 1393 / CLASS 4.6

Part	Size	Length	Thread Length	Head Height	Across Flats
	D (mm)	L (mm)	T (mm)	H (mm)	AF (mm)
BH46GLM060~	M6	25–75	23–62	4.0	10
BH46GLM080~	M8	30–130	27–78	5.0	13
BH46GLM100~	M10	40–150	37–95	6.5	16
BH46GLM120~	M12	40–300	37–180	7.5	18
BH46GLM120250	M12	250	150	7.5	18
BH46GLM120300	M12	300	180	7.5	18
BH46GLM160~	M16	50–200	46–125	10.0	24
BH46GLM200~	M20	100–200	62–125	12.5	30

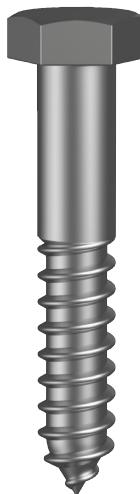


NEW
SIZES +

FEATURES

- Galvanised coating
- Pre-drilling is required to prevent the timber from splitting. Drill a hole half the diameter into softwood and three quarters of the diameter into hardwood
- Gimlet point for better centring in drilled holes

APPLICATIONS

- Fencing and posts
- Agricultural industry
- Timber fixing
- General building materials
- Nylon wall plugs fixed into concrete or masonry

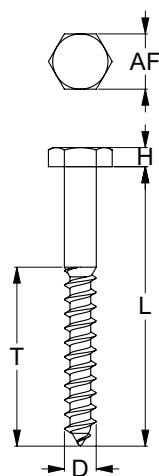

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

