

DID YOU KNOW?

about our...




**NEW
PRODUCT**

Serrated Flanged Hex Bolt

SERRATED FLANGED HEX BOLT ZINC PLATED (ROHS COMPLIANT) / HEC 1665 / CLASS 4.6 UTS

Part	Size	Diameter of Flange		Length	Head Height	Across Flats
	D1 (mm)	D2 (mm)	L (mm)	H (mm)	AF (mm)	
BF46ZCM200055	M20	43	55	18	30	
BF46ZCM200060	M20	43	60	18	30	
BF46ZCM200070	M20	43	70	18	30	

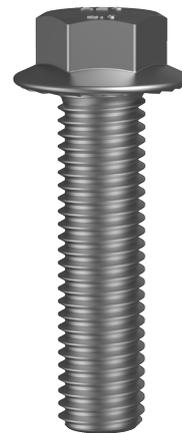


APPLICATIONS

- Connecting temporary props to pre-cast concrete panels
- Fastened in ferrules cast into concrete until panel is permanently secured

FEATURES

- Flange for quicker and easier installation compared to flat or square washers
- Designed for removal after panel is secured

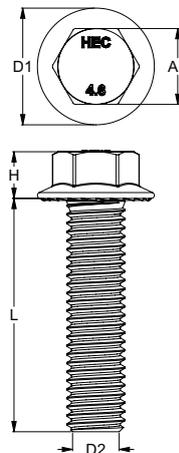

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**



260218DYK