DID YOU KNOW?

about our...



NEW PRODUCT

XBolt® PRO Vertical Hanger

XBOLT® PRO VERTICAL HANGER
ZINC FLAKE SILVER / ETA OPT 1 / C1 C2 FR / AS 5216

Part	QFind	Diameter		Length	Head Diameter	Head Height	Wrench Size	Drill Hole
		D1	D2	L (mm)	D (mm)	H (mm)	AF (mm)	(mm)
EVXMSF18D120060	**EVX111**	M10	M12	60	18	40	15	8







APPLICATIONS

- Mechanical, electrical, and pipe hanger applications
- Ceiling hanger applications
- HVAC
- Fire sprinklers
- Cable trays
- Suspension of mechanical services
- Data centres without causing zinc whiskers

FEATURES

- Dual thread coupler M10 and M12
- ETA / AS 5216 approval — cracked and non-cracked concrete (Opt 1)
- Seismic C1 and C2 rating
- Fire rated
- Suitable for light- to medium-duty loads
- Suitable for small anchor spacing and edge distance applications
- Quick and easy to install
- Fully removable

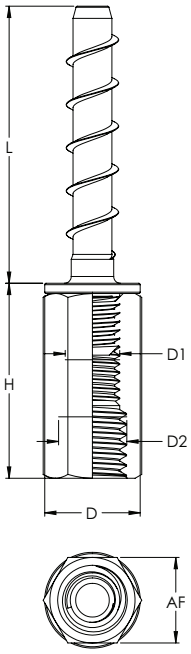

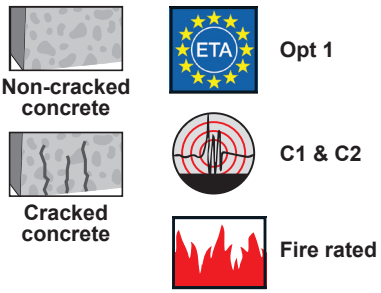



Click on this icon and download ETA from Documents list at **hobson.com.au**

CONXTRUCT PRO

XBolt PRO

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.