


DID YOU KNOW?

about our...




**NEW
PRODUCT**

Heavy Hex Nut

HEAVY HEX NUT

HOT DIP GALVANISED / ASTM A194M / GRADE 2H

Part	Diameter	Across Flats	Across Corners	Thickness
		S (mm)	E (mm)	H (mm)
NP2HGCM12X	M12	19	21.10	12.0
NP2HGCM14X	M14	22	24.49	14.0
NP2HGCM16X	M16	24	26.75	16.0
NP2HGCM20X	M20	30	32.95	20.0
NP2HGCM22X	M22	32	32.95	22.0
NP2HGCM24X	M24	36	39.55	23.9
NP2HGCM27X	M27	41	45.20	27.0
NP2HGCM30X	M30	46	50.85	28.6
NP2HGCM33X	M33	50	55.37	33.0
NP2HGCM36X	M36	55	60.79	34.7




APPLICATIONS

- 2H nuts are used with A193-B7 studs and hex bolts
- Used in the petrochemical industry for bolting of high-pressure and high-temperature flanges

FEATURES

- Grade 2H heavy nuts are thicker than AS 1112 nuts and are designed to prevent thread stripping and withstand extreme pressure and heat

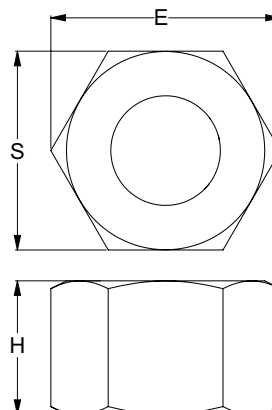

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS** SINCE 1935



2607300DVK