

DID YOU KNOW?

about our...



**NEW
PRODUCT**

Nord-Lock® Washer

STANDARD WASHER BLACK DELTA PROTEKT® / NORD-LOCK®

Part	QFind	Size	Outer Diameter	Inner Diameter	Thickness
			OD (mm)	ID (mm)	T (mm)
WNHTDKM06	NL6BLACK	M6	11.0	6.5	1.8
WNHTDKM08	NL8BLACK	M8	13.5	8.7	2.5
WNHTDKM10	NL10BLACK	M10	16.6	10.7	2.5
WNHTDKM12	NL12BLACK	M12	19.5	13.0	2.5
WNHTDKM16	NL16BLACK	M16	25.4	17.0	3.4
WNHTDKM20	NL20BLACK	M20	30.7	21.4	3.4
WNHTDKM24	NL24BLACK	M24	39.0	25.3	3.4




APPLICATIONS

- Reliable locking of bolted joints
- Rails and trains
- Turbines in wind farms
- Motors

FEATURES

- Secures bolted joints exposed to severe vibration and dynamic loads
- Locking function is not affected by lubrication
- Designed for bolts up to Property Class 12.9
- Black finish for colour matching and aesthetic appearance, blending with existing paintwork on machinery
- Trace number laser-etched directly onto each washer

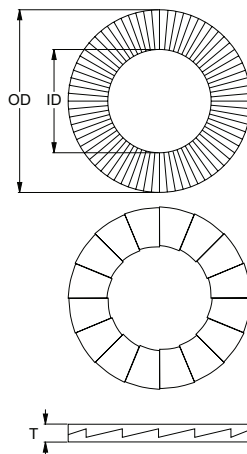

NORD-LOCK®
PART OF THE NORD-LOCK GROUP

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

