

DID YOU KNOW?

about our...



**MORE
SIZES +**

Reduced Base Arc Stud

REDUCED BASE ARC STUD PLAIN / CLASS 4.8 / AS 1554.2

Part	QFind	Diameter		Thread Length	Length	
		d1 (mm)	d2 (mm)		Before Weld L (mm)	After Weld L (mm)
MSSMSRDM160040	SRD1640	16	13.2	33.0	43.0	40
MSSMSRDM160050	SRD1650	16	13.2	42.5	53.6	50
MSSMSRDM160055	SRD1655	16	13.2	47.5	58.6	55
MSSMSRDM160060	SRD1660	16	13.2	52.5	63.6	60
MSSMSRDM160065	SRD1665	16	13.2	57.5	68.6	65
MSSMSRDM160075	SRD1675	16	13.2	67.5	78.6	75
MSSMSRDM200050	SRD2050	20	16.5	41.0	53.9	50



**NEW
SIZES +**

APPLICATIONS

- Wear plates
- Applications requiring limited space around the stud
- Electronic and automotive assemblies
- Construction

FEATURES

- A reduced base means the shank diameter is less than the major diameter of the thread. It is designed for the thread diameter of the stud to exceed the weld fillet
- Length before weld is approx. 3–4 mm longer
- Includes flux ball at the end of the stud to help stabilise the electric arc, resulting in a stronger and cleaner weld

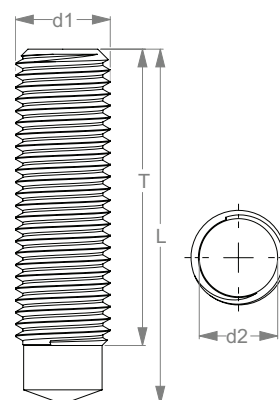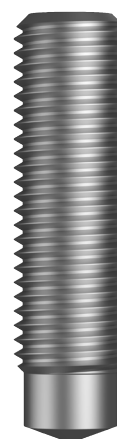

You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

