



HOBSON EAW-ZD CLAWBOLT ANCHOR THROUGH BOLT

ETA 19/0669 (31/10/2019)

Option 1[†]

Seismic


Fire Resistant

DOC Link 10016

[†] Suitable for use in Cracked and Non-Cracked Concrete.



Qfind	Part Number on label	Size	Minimum Embedment	ETA Option	Fire Rating	Seismic C1	Seismic C2	Seismic Embedment
EAW100	EAWMSZD 15 M080080	M8x80	48mm	Option 1	✓	✓		48mm
	EAWMSZD 17 M080080							
EAW101	EAWMSZD 15 M080095	M8x95			✓	✓		
	EAWMSZD 17 M080095							
EAW102	EAWMSZD 15 M080115	M8x115			✓	✓		
	EAWMSZD 17 M080115							
EAW103	EAWMSZD 15 M080130	M8x130			✓	✓		
	EAWMSZD 17 M080130							
EAW105	EAWMSZD 17 M100090	M10x90	60mm	Option 1	✓	✓	✓	60mm
	EAWMSZD 18 M100090							
EAW106	EAWMSZD 17 M100105	M10x105			✓	✓	✓	
	EAWMSZD 18 M100105							
EAW107	EAWMSZD 17 M100120	M10x120			✓	✓	✓	
	EAWMSZD 18 M100120							
EAW108	EAWMSZD 17 M100140	M10x140			✓	✓	✓	
	EAWMSZD 18 M100140							
EAW109	EAWMSZD 17 M100185	M10x185			✓	✓	✓	
	EAWMSZD 18 M100185							
EAW213	EAWMSZD 18 M120100	M12x100	70mm	Option 1	✓	✓	✓	70mm
EAW111	EAWMSZD 18 M120110	M12x110			✓	✓	✓	
EAW112	EAWMSZD 18 M120120	M12x120			✓	✓	✓	
EAW214	EAWMSZD 18 M120130	M12x130			✓	✓	✓	
EAW113	EAWMSZD 18 M120150	M12x150			✓	✓	✓	
EAW114	EAWMSZD 18 M120180	M12x180			✓	✓	✓	
EAW115	EAWMSZD 18 M120200	M12x200			✓	✓	✓	
EAW121	EAWMSZD 17 M160125	M16x125	85mm	Option 1	✓	✓		85mm
EAW122	EAWMSZD 17 M160145	M16x145			✓	✓		
EAW123	EAWMSZD 17 M160175	M16x175			✓	✓		
EAW124	EAWMSZD 17 M160220	M16x220			✓	✓		
EAW216	EAWMSZD 17 M160250	M16x250			✓	✓		
EAW125	EAWMSZD 18 M200170	M20x170	100mm	Option 1	✓	✓	✓	100mm
EAW217	EAWMSZD 18 M200200	M20x200						



**INSTITUTO DE CIENCIAS
DE LA CONSTRUCCIÓN
EDUARDO TORROJA**

C/ Serrano Galvache n. 4 28033 Madrid (Spain)
Tel.: (34) 91 302 04 40 Fax: (34) 91 302 07 00
direccion.ietcc@csic.es <https://dit.ietcc.csic.es>



European Technical Assessment

**ETA 19/0669
of 31/10/2019**

English translation prepared by IETcc. Original version in Spanish language

General Part

**Technical Assessment Body issuing
the ETA designated according to
Art. 29 of Regulation (EU) 305/2011:**

Instituto de Ciencias de la Construcción Eduardo
Torroja (IETcc)

**Trade name of the construction
product:**

**Anchor EAW
Anchor EAW-GD
Anchor EAW-ZD**

**Product family to which the
construction product belongs:**

Torque controlled expansion anchor made of
galvanized steel or sherardized steel of sizes M8,
M10, M12, M16, M20 and M24 for use in concrete.

Manufacturer:

Hobson Engineering Co. Pty. Ltd.
10 Clay Place, Eastern Creek,
NSW, Australia 2766
website: www.hobson.com.au

Manufacturing plants:

Hobson Engineering plant no 1

**This European Technical
Assessment contains:**

14 pages including 3 annexes which form an
integral part of this assessment.

**This European Technical
Assessment is issued in accordance
with regulation (EU) No 305/2011, on
the basis of:**

European Technical Assessment EAD 330232-00-
0601 "Mechanical Fasteners for use in concrete",
ed. October 2016

English translation prepared by IETcc

This European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to article 25 (3) of Regulation (EU) No 305/2011.

SPECIFIC PART

1. Technical description of the product

The Hobson EAW wedge anchor in the range of M8, M10, M12, M16, M20 and M24 is an anchor made of galvanised steel. The Hobson EAW-GD wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of sherardized steel. The Hobson EAW-ZD wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of galvanized steel. The anchor is installed into a predrilled cylindrical hole and anchored by torque-controlled expansion. The anchorage is characterised by friction between expansion clip and concrete.

Product and installation descriptions are given in annex A.

2. Specification of the intended use in accordance with the applicable European Assessment Document.

The performances given in section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a mean to choosing the right products in relation to the expected economically reasonable working life of the works.

3. Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under static or quasi static loading	See annexes C1 to C3
Displacements under tension and shear loads	See annex C4
Characteristic resistance under seismic loading categories C1 and C2	See annex C5 and C6

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for class A1
Resistance to fire	See annex C7

4. Assessment and Verification of Constancy of Performances (hereinafter AVCP) system applied, with reference to its legal base

The applicable European legal act for the system of Assessment and Verification of Constancy of Performances (see annex V to Regulation (EU) No 305/2011) is 96/582/EC.

English translation prepared by IETcc

The system to be applied is 1.

5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document.

The technical details necessary for the implementation of the AVCP system are laid down in the quality plan deposited at Instituto de Ciencias de la Construcción Eduardo Torroja.



Instituto de Ciencias de la Construcción Eduardo Torroja
CONSEJO SUPERIOR DE INVESTIGACIONES CIENTÍFICAS

C/ Serrano Galvache n.º 4. 28033 Madrid.
Tel: (+34) 91 302 04 40 Fax. (+34) 91 302 07 00
<https://dit.ietcc.csic.es>



On behalf of the Instituto de Ciencias de la Construcción Eduardo Torroja
Madrid, 31st of October 2019



Director

Product and installed condition

EAW, EAW-GD, EAW-ZD anchor




Identification on anchor:

- Expansion clip:
 - Anchor EAW: "EAW" + Metric.
 - Anchor EAW-GD: "EAW-GD" + Metric.
 - Anchor EAW-ZD: "EAW-ZD" + Metric.
- Anchor body: Metric x Length
- Blue ring mark to show embedment depth
- Length letter code on head:

Letter on head	Length [mm]
C	68 ÷ 75
D	76 ÷ 88
E	89 ÷ 101
F	102 ÷ 113
G	114 ÷ 126
H	127 ÷ 139

Letter on head	Length [mm]
I	140 ÷ 151
J	152 ÷ 164
K	165 ÷ 177
L	178 ÷ 190
M	191 ÷ 202
N	203 ÷ 215

Letter on head	Length [mm]
P	229 ÷ 240
Q	241 ÷ 253
R	254 ÷ 266
S	267 ÷ 300

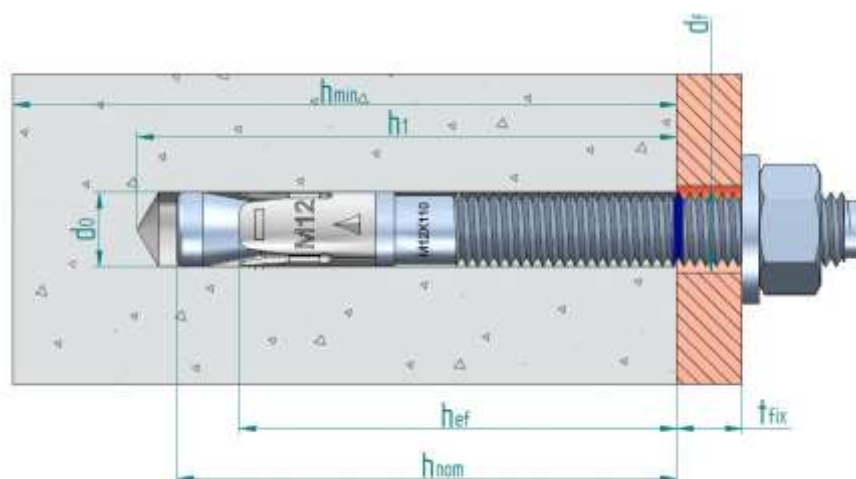

- d_0 : Nominal diameter of drill bit
 d_f : Fixture clearance hole diameter
 h_{ef} : Effective anchorage depth
 h_1 : Depth of drilled hole
 h_{nom} : Overall anchor embedment depth in the concrete
 h_{min} : Minimum thickness of concrete member
 t_{fix} : Fixture thickness

EAW, EAW-GD, EAW-ZD anchors

Product description

Installed condition

Annex A1

Table A1: materials

Item	Designation	Material for EAW	Material for EAW-GD	Material for EAW-ZD
1	Anchor body	M8 to M20: carbon steel wire rod, galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2 with antifriction coating M24: machine carbon steel, galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2 with antifriction coating	Carbon steel wire rod, sherardized $\geq 40 \mu\text{m}$ EN 13811	Carbon steel wire rod, galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2 with antifriction coating
2	Washer	DIN 125, DIN 9021 galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2	DIN 125, DIN 9021 sherardized $\geq 40 \mu\text{m}$ EN 13811	DIN 125, DIN 9021 galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2
3	Nut	DIN 934 galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2, class 6	DIN 934 sherardized $\geq 40 \mu\text{m}$ EN 13811, class 6	DIN 934 galvanized $\geq 5 \mu\text{m}$ ISO 4042 A2, class 6
4	Expansion clip	Stainless steel, grade A4	Stainless steel, grade A4	Carbon steel strip, sherardized $\geq 15 \mu\text{m}$ EN 13811

EAW, EAW-GD, EAW-ZD anchor

Product description

Materials

Annex A2

Specifications of intended use

Anchorage subjected to:

- Static or quasi static loads
- Seismic actions:
 - for performance category C1:
 - EAW: M10, M12 and M16
 - EAW-ZD: M10, M12, M16 and M20
 - for performance category C2:
 - EAW: M12 and M16
 - EAW-ZD: M12 and M20
- Resistance to fire exposure up to 120 minutes: all versions and sizes

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2008
- Strength classes C20/25 to C50/60 according to EN 206-1:2008
- Cracked or uncracked concrete

Use conditions (environmental conditions):

- Anchorages subjected to dry internal conditions.

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete.
- Verifiable calculation rules and drawings are prepared taking into account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed for design method A in accordance with:
 - EN1992-4:2018
- Anchorages under seismic actions (cracked concrete) are designed in accordance with:
 - EN1992-4:2018
 - Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure
 - Fastening in stand-off installation or with grout layer are not allowed.
- Anchorages under fire exposure are designed in accordance with:
 - EN 1992-4:2018
 - It must be ensured that local spalling of the concrete cover does not occur.

Installation:

- Hole drilling by rotary plus hammer mode.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.

EAW, EAW-GD, EAW-ZD anchor	Annex B1
Intended use	
Specifications	


Table C1: Installation parameters for EAW, EAW-GD, EAW-ZD anchor

Installation parameters			Performances					
			M8	M10	M12	M16	M20	M24
d ₀	Nominal diameter of drill bit:	[mm]	8	10	12	16	20	24
d _f	Fixture clearance hole diameter:	[mm]	9	12	14	18	22	26
T _{inst}	Nominal installation torque:	[Nm]	20/15 ¹⁾	40	60	100	200	250
L _{min}	Total length of the bolt:	[mm]	68	82	98	119	140	175
L _{max}		[mm]	200	200	250	250	300	400
h _{min}	Minimum thickness of concrete member:	[mm]	100	120	140	170	200	250
h ₁	Depth of drilled hole:	[mm]	60	75	85	105	125	155
h _{nom}	Overall anchor embedment depth in the concrete:	[mm]	55	68	80	97	114	143
h _{ef}	Effective anchorage depth:	[mm]	48	60	70	85	100	125
t _{fix}	Thickness of fixture ²⁾ :	[mm]	L - 66	L - 80	L - 96	L - 117	L - 138	L - 170
s _{min}	Minimum allowable spacing:	[mm]	50	60	70	85/128 ¹⁾	100/150 ¹⁾	125
c _{min}	Minimum allowable distance:	[mm]	50	60	70	85/128 ¹⁾	100/150 ¹⁾	125

¹⁾ Respective values for anchors EAW / EAW-GD, EAW-ZD

²⁾ L = total anchor length

Installation process

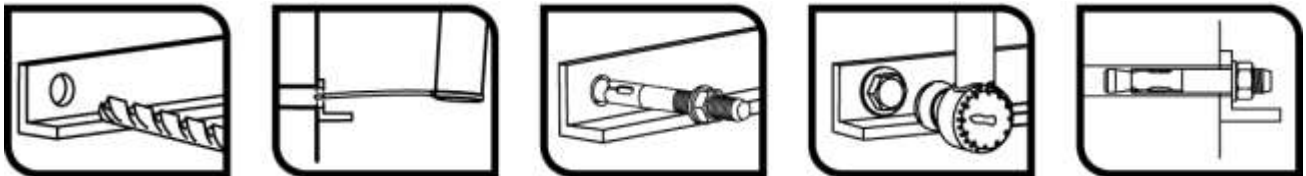

EAW, EAW-GD, EAW-ZD anchor

Performances

Installation parameters and installation procedure

Annex C1

Table C2: Characteristic values to tension loads of design method A according to EN1992-4 for EAW, EAW-GD, EAW-ZD anchor

Characteristic values of resistance to tension loads of design according to design method A			Performances					
			M8	M10	M12	M16	M20	M24
Tension loads: steel failure								
N _{Rk,s}	Characteristic resistance:	[kN]	18.1	31.4	40.4	72.7	116.6	179.2
γ _{Ms}	Partial safety factor:	[-]	1.5	1.5	1.5	1.5	1.5	1.5
Tension loads: pull-out failure in concrete								
EAW anchor								
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	16	20	35	50	50
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:	[kN]	5	9	12	25	30	30
EAW-GD anchor								
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	16	30	35	50	--
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:	[kN]	6	9	16	25	30	--
EAW-ZD anchor								
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	16	25	35	50	--
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:	[kN]	6	9	16	25	30	--
γ _{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2
ψ _c	Increasing factor for N ⁰ _{Rk,p} :	C30/37	1.22	1.16	1.22	1.22	1.16	1.22
		C40/50	1.41	1.31	1.41	1.41	1.31	1.41
		C50/60	1.55	1.41	1.55	1.55	1.41	1.55
Tension loads: concrete cone and splitting failure								
h _{ef}	Effective embedment depth:	[mm]	48	60	70	85	100	125
k _{ucr,N}	Factor for uncracked concrete:	[-]	11.0					
k _{cr,N}	Factor for cracked concrete:	[-]	7,7					
k _{ucr,N}	Factor for uncracked concrete:	[-]	10.1					
k _{cr,N}	Factor for cracked concrete:	[-]	7,2					
γ _{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2
s _{cr,N}	Concrete cone failure:	[mm]	3 x h _{ef}					
c _{cr,N}		[mm]	1.5 x h _{ef}					
s _{cr,sp}	Splitting failure:	[mm]	288	300	350	425/510 ¹⁾	500/600 ¹⁾	560
c _{cr,sp}		[mm]	144	150	175	213/255 ¹⁾	250/300 ¹⁾	280

¹⁾ Respective values for anchors EAW / EAW-GD, EAW-ZD

EAW, EAW-GD, EAW-ZD anchor	Annex C2
Performances	
Characteristic values for tension loads	

Table C3: Characteristic values to shear loads of design method A according to EN1992-4 for EAW, EAW-GD, EAW-ZD anchor

Characteristic values of resistance to shear loads of design according to design method A			Performances					
			M8	M10	M12	M16	M20	M24
Shear loads: steel failure without lever arm								
V _{Rk,s}	Characteristic resistance:	[kN]	11.0	17.4	25.3	47.1	73.1	84.7
k ₇	k ₇ factor:	[-]	1.0					
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	1.25
Shear loads: steel failure with lever arm								
M ⁰ _{Rk,s}	Characteristic bending moment:	[Nm]	22.5	44.8	78.6	199.8	389.4	673.5
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	1.25
Shear loads: concrete pryout failure								
k ₈	k ₈ factor:	[-]	1	2	2	2	2	2
γ _{ins}	Installation safety factor:	[-]	1.0					
Shear loads: concrete edge failure								
l _f	Effective length of anchor under shear loads:	[mm]	48	60	70	85	100	125
d _{nom}	Outside anchor diameter:	[mm]	8	10	12	16	20	24
γ _{ins}	Installation safety factor:	[-]	1.0					

EAW, EAW-GD, EAW-ZD anchor

Performances

Characteristic values for shear load.

Annex C3

Table C4: Displacements under tension load for EAW, EAW-GD, EAW-ZD anchor

Displacements under tension loads				Performances					
				M8	M10	M12	M16	M20	M24
EAW anchor									
N	Service tension load:	[kN]		2.5	4.3	6.3	10.4	13.9	18.0
δ_{N0}	Short term displacement:	[mm]		1.1	0.7	1.0	0.4	1.6	0.4
$\delta_{N\infty}$	Long term displacement:	[mm]		1.9	1.9	1.9	1.9	1.9	2.0
EAW-GD anchor									
N	Service tension load:	[kN]		2.5	4.3	6.3	10.4	13.9	--
δ_{N0}	Short term displacement:	[mm]		1.0	1.1	0.9	1.5	1.2	--
$\delta_{N\infty}$	Long term displacement:	[mm]		1.9	1.9	1.9	1.9	1.9	--
EAW-ZD anchor									
N	Service tension load:	[kN]		2.5	4.3	7.6	11.9	14.3	--
δ_{N0}	Short term displacement:	[mm]		1.0	1.1	0.9	1.5	1.3	--
$\delta_{N\infty}$	Long term displacement:	[mm]		1.6	1.6	1.6	1.6	1.6	--

Table C5: Displacements under shear load for EAW, EAW-GD, EAW-ZD anchor

Displacements under shear loads				Performances					
				M8	M10	M12	M16	M20	M24
EAW anchor									
V	Service shear load:	[kN]		4.9	6.8	8.5	15.1	24.6	33.6
δ_{V0}	Short term displacement:	[mm]		1.0	1.5	1.8	1.9	3.1	1.4
$\delta_{V\infty}$	Long term displacement:	[mm]		1.5	2.3	2.7	2.9	4.7	2.1
EAW-GD anchor									
V	Service shear load:	[kN]		4.9	6.8	8.5	15.1	24.6	-
δ_{V0}	Short term displacement:	[mm]		1.0	1.5	1.8	1.9	3.1	--
$\delta_{V\infty}$	Long term displacement:	[mm]		1.5	2.3	2.7	2.9	4.7	--
EAW-ZD anchor									
V	Service shear load:	[kN]		4.9	6.8	8.5	15.1	24.6	--
δ_{V0}	Short term displacement:	[mm]		1.0	1.5	1.8	1.9	3.1	--
$\delta_{V\infty}$	Long term displacement:	[mm]		1.5	2.3	2.7	2.9	4.7	--

EAW, EAW-GD, EAW-ZD anchor

Performances

Displacements under tension and shear loads

Annex C4

Table C6: Design information for seismic performance C1 EAW, EAW-ZD anchor

Design information for seismic performance C1			Performances					
			M8	M10	M12	M16	M20	M24
Steel failure for tension and shear failure								
$N_{Rk,s,seis}$	Characteristic tension steel failure:	[kN]	--	31.4	40.4	72.7	116.6	--
$\gamma_{Ms,N}$	Partial safety factor:	[-]	--	1.5	1.5	1.5	1.5	--
$V_{Rk,p,seis}$	Characteristic shear steel failure:	[kN]	--	12.2	17.8	33.0	58.5	--
$\gamma_{Ms,V}$	Partial safety factor:	[-]	--	1.25	1.25	1.25	1.25	--
Pull out failure								
EAW anchor								
$N_{Rk,p,seis}$	Characteristic pull out failure:	[kN]	--	5.3	8.4	17.5	--	--
EAW-ZD anchor								
$N_{Rk,p,seis}$	Characteristic pull out failure:	[kN]	--	3.9	16.0	25.0	30.0	--
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.0	1.0	1.0	--
Concrete cone failure								
h_{ef}	Effective embedment depth:	[mm]	--	60	70	85	100	--
$s_{cr,N}$	Spacing:	[mm]	--	3 x h_{ef}				--
$c_{cr,N}$	Edge distance:	[mm]	--	1.5 x h_{ef}				--
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.0	1.0	1.0	--
Concrete pryout failure								
k_3	k_3 factor:	[-]	--	2	2	2	2	--
Concrete edge failure								
l_f	Effective length of anchor:	[mm]	--	60	70	85	100	--
d_{nom}	Outside anchor diameter:	[-]	--	10	12	16	20	--

EAW, EAW-ZD anchor

Performances

Design information for seismic performance C1

Annex C5

Table C7: Design information for seismic performance C2 EAW, EAW-ZD anchor

Design information for seismic performance C2			Performances					
			M8	M10	M12	M16	M20	M24
Steel failure for tension and shear failure								
$N_{Rk,s,seis}$	Characteristic tension steel failure:	[kN]	--	--	40.4	72.7	116.6	--
$\gamma_{Ms,N}$	Partial safety factor:	[-]	--	--	1.5	1.5	1.5	--
$V_{Rk,p,seis}$	Characteristic shear steel failure:	[kN]	--	--	17.8	33.0	58.5	--
$\gamma_{Ms,V}$	Partial safety factor:	[-]	--	--	1.25	1.25	1.25	--
Pull out failure								
EAW anchor								
$N_{Rk,p,seis}$	Characteristic pull out failure:	[kN]	--	--	5.2	8.9	--	--
EAW-ZD anchor								
$N_{Rk,p,seis}$	Characteristic pull out failure:	[kN]	--	--	9.1	--	21.0	--
γ_{ins}	Installation safety factor:	[-]	--	--	1.0	1.0	1.0	--
Concrete cone failure								
h_{ef}	Effective embedment depth:	[mm]	--	--	70	85	100	--
$s_{cr,N}$	Spacing:	[mm]	--	--	3 x h_{ef}			--
$c_{cr,N}$	Edge distance:	[mm]	--	--	1.5 x h_{ef}			--
γ_{ins}	Installation safety factor:	[-]	--	--	1.0	1.0	1.0	--
Concrete pryout failure								
k_3	k_3 factor:	[-]	--	--	2	2	2	--
Concrete edge failure								
l_f	Effective length of anchor:	[mm]	--	--	70	85	100	--
d_{nom}	Outside anchor diameter:	[-]	--	--	12	16	20	--
Displacements								
EAW anchor								
$\delta_{N,seis} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	2.34	3.99	--	--
$\delta_{V,seis} (DLS)$		[mm]	--	--	5.53	5.96	--	--
$\delta_{N,seis} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	9.54	10.17	--	--
$\delta_{V,seis} (ULS)$		[mm]	--	--	9.08	10.66	--	--
EAW-ZD anchor								
$\delta_{N,seis} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	5.57	--	6.82	--
$\delta_{V,seis} (DLS)$		[mm]	--	--	5.53	--	6.37	--
$\delta_{N,seis} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	20.31	--	29.12	--
$\delta_{V,seis} (ULS)$		[mm]	--	--	9.08	--	12.32	--

¹⁾ The listed displacements represent mean values

²⁾ A small displacement may be required in the design in the case of displacements sensitive fastening of "rigid" supports. The characteristics resistance associated with such small displacements may be determined by linear interpolation or proportional reduction.

EAW, EAW-ZD anchor

Performances

Design information for seismic performance C2

Annex C6

Table C8: Characteristic values for resistance to fire EAW, EAW-GD, EAW-ZD anchor

Characteristic values for resistance to fire				Performances					
				M8	M10	M12	M16	M20	M24
Steel failure									
N _{Rk,s,fi}	Characteristic tension resistance:	R30	[kN]	0,4	0,9	1,7	3,1	4,9	7,1
		R60	[kN]	0,3	0,8	1,3	2,4	3,7	5,3
		R90	[kN]	0,3	0,6	1,1	2,0	3,2	4,6
		R120	[kN]	0,2	0,5	0,8	1,6	2,5	3,5
V _{Rk,s,fi}	Characteristic shear resistance:	R30	[kN]	0,4	0,9	1,7	3,1	4,9	7,1
		R60	[kN]	0,3	0,8	1,3	2,4	3,7	5,3
		R90	[kN]	0,3	0,6	1,1	2,0	3,2	4,5
		R120	[kN]	0,2	0,5	0,8	1,6	2,5	3,5
M ⁰ _{Rk,s,fi}	Characteristic bending resistance:	R30	[kN]	0,4	1,1	2,6	6,7	13,0	22,5
		R60	[kN]	0,3	1,0	2,0	5,0	9,7	16,8
		R90	[kN]	0,3	0,7	1,7	4,3	8,4	14,6
		R120	[kN]	0,2	0,6	1,3	3,3	6,5	11,2
Pull out failure									
N _{Rk,p,fi}	Characteristic resistance:	R30							
		R60	[kN]	1,3/1,5 ¹⁾	2,3	3,0/4,0 ¹⁾	6,3	7,5	7,5
		R90							
		R120	[kN]	1,0/1,2 ¹⁾	1,8	2,4/3,2 ¹⁾	5,0	6,0	6,0
Concrete cone failure ²⁾									
N _{Rk,p,fi}	Characteristic resistance:	R30							
		R60	[kN]	2,9	5,0	7,4	12,0	18,0	31,4
		R90							
		R120	[kN]	2,3	4,0	5,9	9,6	14,4	25,2
Scr.N,fi	Critical spacing:	R30 to R120	[mm]	4 x hef					
Smin,fi	Minimum spacing:	R30 to R120	[mm]	50	60	70	85/128 ¹⁾	100/150 ¹⁾	125
Ccr.N,fi	Critical edge distance:	R30 to R120	[mm]	2 x hef					
Cmin,fi	Minimum edge distance:	R30 to R120	[mm]	Cmin = 2 x hef; if fire attack comes from more than one side, the edge distance of the anchor has to be ≥ 300 mm and ≥ 2 x hef					
Concrete pry out failure									
k3	k3 factor:	R30 to R120	[-]	1	2	2	2	2	2

¹⁾ Respective values for anchors EAW / EAW-GD, EAW-ZD

²⁾ As a rule, splitting failure can be neglected since cracked concrete and reinforcement is assumed.


In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{m,fi} = 1,0$ is recommended

EAW, EAW-GD, EAW-ZD anchor

Performances

Characteristic values for resistance to fire

Annex C7



**INSTITUTO DE CIENCIAS
DE LA CONSTRUCCIÓN
EDUARDO TORROJA**

C/ Serrano Galvache n. 4 28033 Madrid (Spain)
Tel.: (34) 91 302 04 40
direccion.ietcc@csic.es <https://dit.ietcc.csic.es>



European Technical Assessment

**ETA 12/0397
of 06/08/2021**

English translation prepared by IETcc. Original version in Spanish language

General Part

**Technical Assessment Body issuing
the ETA designated according to
Art. 29 of Regulation (EU) 305/2011:**

Instituto de Ciencias de la Construcción Eduardo
Torroja (IETcc)

**Trade name of the construction
product:**

**Anchor MTP
Anchor MTP-G
Anchor MTP-X
Anchor MTP-A4**

**Product family to which the
construction product belongs:**

Torque controlled expansion anchor made of
galvanized steel, sherardized steel or stainless
steel of sizes M8, M10, M12, M16, M20 and M24
for use in cracked or uncracked concrete.

Manufacturer:

Index - Técnicas Expansivas S.L.
Segador 13
26006 Logroño (La Rioja) Spain.
website: www.indexfix.com

Manufacturing plants:

Index plant 2

**This European Technical
Assessment contains:**

17 pages including 3 annexes which form an
integral part of this assessment.

**This European Technical
Assessment is issued in accordance
with regulation (EU) No 305/2011, on
the basis of:**

European Technical Assessment EAD 330232-00-
0601 "Mechanical Fasteners for use in concrete",
ed. October 2016

This version replaces:

ETA 12/0397 version 4 issued on 08/10/2020

English translation prepared by IETcc

This European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to article 25 (3) of Regulation (EU) No 305/2011.

SPECIFIC PART

1. Technical description of the product

The Index MTP wedge anchor in the range of M8, M10, M12, M16, M20 and M24 is an anchor made of galvanised steel. The Index MTP-G wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of sherardized steel. The Index MTP-X wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of galvanized steel. The Index MTP-A4 wedge anchor in the range of M8, M10, M12, M16 and M20 is an anchor made of stainless steel. The anchor is installed into a predrilled cylindrical hole and anchored by torque-controlled expansion. The anchorage is characterized by friction between expansion clip and concrete.

Product and installation descriptions are given in annexes A1 and A2.

2. Specification of the intended use in accordance with the applicable European Assessment Document.

The performances given in section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a mean to choosing the right products in relation to the expected economically reasonable working life of the works.

3. Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under static or quasi static loading	See annexes C1 to C5
Displacements under tension and shear loads	See annex C6
Characteristic resistance under seismic loading categories C1 and C2	See annex C7 and C8

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for class A1
Resistance to fire	See annexes C9 and C10

4. Assessment and Verification of Constancy of Performances (hereinafter AVCP) system applied, with reference to its legal base

The applicable European legal act for the system of Assessment and Verification of Constancy of Performances (see annex V to Regulation (EU) No 305/2011) is 96/582/EC.

The system to be applied is 1.

English translation prepared by IETcc

5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document.

The technical details necessary for the implementation of the AVCP system are laid down in the quality plan deposited at Instituto de Ciencias de la Construcción Eduardo Torroja.



Instituto de Ciencias de la Construcción Eduardo Torroja
CONSEJO SUPERIOR DE INVESTIGACIONES CIENTÍFICAS

C/ Serrano Galvache n.º 4. 28033 Madrid.

Tel: (+34) 91 302 04 40

<https://dit.ietcc.csic.es>



On behalf of the Instituto de Ciencias de la Construcción Eduardo Torroja
Madrid, 6th of August of 2021

Firmado por CASTILLO TALAVERA ANGEL

- DNI 52507605P


Fecha: 08/09/2021 15:42:08 CEST



Director IETcc - CSIC

Product and installed condition

MTP, MTP-G, MTP-X, MTP-A4 anchor

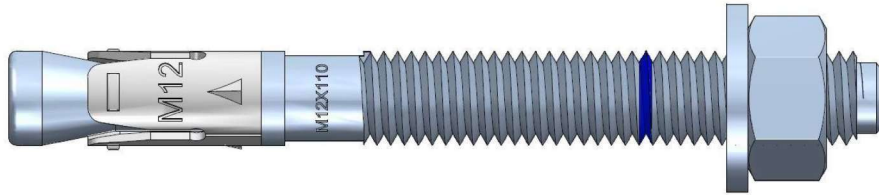


Identification on anchor:

- Expansion clip:
 - Anchor MTP: Company logo + "MTP" + Metric.
 - Anchor MTP-G: Company logo + "MTP-G" + Metric.
 - Anchor MTP-X: Company logo + "MTP-X" + Metric
 - Anchor MTP-A4: Company logo + "MTP-A4" + Metric
- Anchor body: Metric x Length
- Blue ring mark to show embedment depth
- Length letter code on head:

Letter on head	Length [mm]
C	68 ÷ 75
D	76 ÷ 88
E	89 ÷ 101
F	102 ÷ 113
G	114 ÷ 126
H	127 ÷ 139

Letter on head	Length [mm]
I	140 ÷ 151
J	152 ÷ 164
K	165 ÷ 177
L	178 ÷ 190
M	191 ÷ 202
N	203 ÷ 215

Letter on head	Length [mm]
O	216 ÷ 228
P	229 ÷ 240
Q	241 ÷ 253
R	254 ÷ 266
S	267 ÷ 300

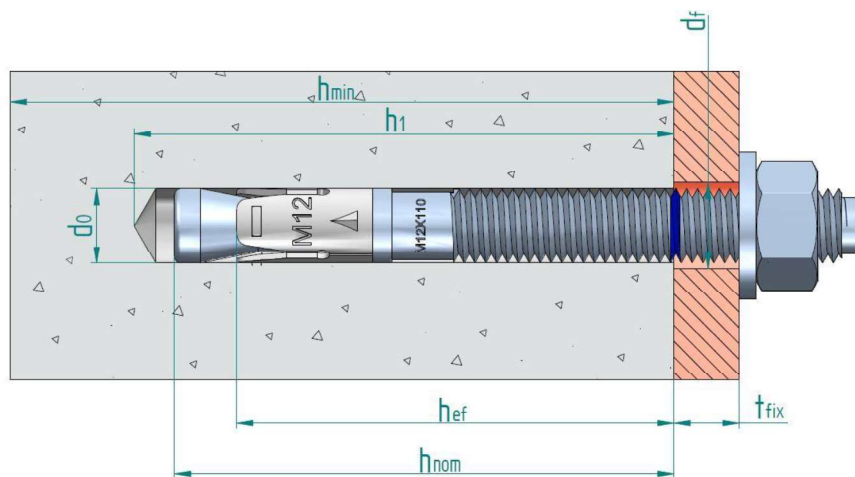

- d_0 : Nominal diameter of drill bit
 d_f : Fixture clearance hole diameter
 h_{ef} : Effective anchorage depth
 h_1 : Depth of drilled hole
 h_{nom} : Overall anchor embedment depth in the concrete
 h_{min} : Minimum thickness of concrete member
 t_{fix} : Fixture thickness

MTP, MTP-G, MTP-X, MTP-A4 anchors

Product description

Installed condition

Annex A1

Table A1: materials

Item	Designation	Material for MTP	Material for MTP-G
1	Anchor body	M8 to M20: carbon steel wire rod, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0 with antifriction coating M24: machine carbon steel, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0 with antifriction coating	Carbon steel wire rod, sherardized $\geq 40 \mu\text{m}$ EN 13811
2	Washer	DIN 125, DIN 9021, DIN 440 galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0	DIN 125, DIN 9021, DIN 440 sherardized $\geq 40 \mu\text{m}$ EN 13811
3	Nut	DIN 934 class 6, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0	DIN 934 class 6, sherardized $\geq 40 \mu\text{m}$ EN 13811
4	Expansion clip	Stainless steel, grade A4	Stainless steel, grade A4

Item	Designation	Material for MTP-X	Material for MTP-A4
1	Anchor body	Carbon steel wire rod, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0 with antifriction coating	Stainless steel, grade A4
2	Washer	DIN 125, DIN 9021, DIN 440 galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0	DIN 125, DIN 9021, DIN 440 stainless steel, grade A4
3	Nut	DIN 934 class 6 galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0	Stainless steel, grade A4 with antifriction coating
4	Expansion clip	Carbon steel strip, sherardized $\geq 15 \mu\text{m}$ EN 13811	Stainless steel, grade A4, galvanized $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0

MTP, MTP-G, MTP-X, MTP-A4 anchor

Product description

Materials

Annex A2

Specifications of intended use

Anchorage subjected to:

- Static or quasi static loads
- Seismic actions:

Version	Category	M6	M8	M10	M12	M16	M20	M24
MTP	C1			✓	✓	✓		
	C2				✓	✓		
MTP-X	C1		✓	✓	✓	✓	✓	
	C2			✓	✓		✓	

- Resistance to fire exposure up to 120 minutes: all versions and sizes

Base materials:

- Reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013+A1:2016
- Strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016
- Cracked or uncracked concrete

Use conditions (environmental conditions):

- Anchorages subjected to dry internal conditions: all anchors
- MTP-A4: anchorages subjected to dry internal conditions, to external atmospheric exposure (including industrial and marine environment) or to permanent internal damp conditions if no particular aggressive conditions exist. Such particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used). Atmospheres under Corrosion Resistance Class CRC III according to EN 1993-1-4:2006+A1:2015 annex A.

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete.
- Verifiable calculation rules and drawings are prepared taking into account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed for design method A in accordance with EN 1994-4:2018
- Anchorages under seismic actions are designed in accordance with EN 1992-4:2018. Anchorages shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure. Fastening in stand-off installation or with grout layer are not allowed.
- Anchorages under fire exposure are designed in accordance with EN 1992-4:2018. It must be ensured that local spalling of the concrete cover does not occur.

Installation:

- Hole drilling by rotary plus hammer mode.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.

MTP, MTP-G, MTP-X, MTP-A4 anchor

Intended use

Specifications

Annex B1

Table C1: Installation parameters for MTP, MTP-G, MTP-X anchor

Installation parameters			Performances					
			M8	M10	M12	M16	M20	M24
d ₀	Nominal diameter of drill bit:	[mm]	8	10	12	16	20	24
d _f	Fixture clearance hole diameter:	[mm]	9	12	14	18	22	26
T _{inst}	Nominal installation torque:	[Nm]	20/15 ¹⁾	40	60	100	200	250
L _{min}	Minimum total length of the bolt:	[mm]	68	82	98	119	140	175
h _{min}	Minimum thickness of concrete member:	[mm]	100	120	140	170	200	250
h ₁	Depth of drilled hole:	[mm]	60	75	85	105	125	155
h _{nom}	Overall anchor embedment depth in the concrete:	[mm]	55	68	80	97	114	143
h _{ef}	Effective anchorage depth:	[mm]	48	60	70	85	100	125
t _{fix}	Thickness of fixture for washer DIN 125 ≤ ²⁾	[mm]	L - 66	L - 80	L - 96	L - 117	L - 138	L - 170
t _{fix}	Thickness of fixture for washers DIN 9021, DIN 440 ≤ ²⁾	[mm]	L - 67	L - 81	L - 97	L - 118	L - 139	L - 171
s _{min}	Minimum allowable spacing:	[mm]	50	60	70	85/128 ¹⁾	100/150 ¹⁾	125
c _{min}	Minimum allowable distance:	[mm]	50	60	70	85/128 ¹⁾	100/150 ¹⁾	125

¹⁾ Respective values for anchors MTP / MTP-G, MTP-X

²⁾ L = total anchor length

Table C2: Installation parameters for MTP-A4 anchor

Installation parameters			Performances				
			M8	M10	M12	M16	M20
d ₀	Nominal diameter of drill bit:	[mm]	8	10	12	16	20
d _f	Fixture clearance hole diameter:	[mm]	9	12	14	18	22
T _{inst}	Nominal installation torque:	[Nm]	15	30	60	100	200
L _{min}	Minimum total length of the bolt:	[mm]	68	82	98	119	140
h _{min}	Minimum thickness of concrete member:	[mm]	100	120	140	170	200
h ₁	Depth of drilled hole:	[mm]	60	75	85	105	125
h _{nom}	Overall anchor embedment depth in the concrete:	[mm]	55	68	80	97	114
h _{ef}	Effective anchorage depth:	[mm]	48	60	70	85	100
t _{fix}	Thickness of fixture for washer DIN 125 ≤ ¹⁾	[mm]	L - 66	L - 80	L - 96	L - 117	L - 138
t _{fix}	Thickness of fixture for washers DIN 9021, DIN 440 ≤ ¹⁾	[mm]	L - 67	L - 81	L - 97	L - 118	L - 139
s _{min}	Minimum allowable spacing:	[mm]	42	47	57	75	100
c _{min}	Minimum allowable distance:	[mm]	47	52	62	75	90

¹⁾ L = total anchor length





MTP, MTP-G, MTP-X, MTP-A4 anchor

Performances

Installation parameters

Annex C1

Installation process



MTP, MTP-G, MTP-X, MTP-A4 anchor

Performances

Installation procedure

Annex C2

Table C3: Essential characteristics under static or quasi-static tension loads according to design method A according to EN 1992-4 for MTP, MTP-G, MTP-X anchor

Essential characteristics under static or quasi-static tension loads according to design method A			Performances					
			M8	M10	M12	M16	M20	M24
Tension loads: steel failure								
N _{Rk,s}	Characteristic resistance:	[kN]	18.1	31.4	40.4	72.7	116.6	179.2
γ _{Ms}	Partial safety factor:	[-]	1.5	1.5	1.5	1.5	1.5	1.5
Tension loads: pull-out failure in concrete								
MTP anchor								
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	16	20	35	50	50
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:	[kN]	5	9	12	25	30	30
MTP-G anchor								
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	16	30	35	50	--
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:	[kN]	6	9	16	25	30	--
MTP-X anchor								
N _{Rk,p,ucr}	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	16	25	35	50	--
N _{Rk,p,cr}	Characteristic resistance in C20/25 cracked concrete:	[kN]	6	9	16	25	30	--
γ _{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2
ψ _c	Increasing factor for N ⁰ _{Rk,p} :	C30/37	1.22	1.16	1.22	1.22	1.16	1.22
		C40/50	1.41	1.31	1.41	1.41	1.31	1.41
		C50/60	1.55	1.41	1.55	1.55	1.41	1.55
Tension loads: concrete cone and splitting failure								
h _{ef}	Effective embedment depth:	[mm]	48	60	70	85	100	125
k _{ucr,N}	Factor for uncracked concrete:	[-]	11.0					
k _{cr,N}	Factor for cracked concrete:	[-]	7,7					
γ _{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2
s _{cr,N}	Concrete cone failure:	[mm]	3 x h _{ef}					
c _{cr,N}		[mm]	1.5 x h _{ef}					
s _{cr,sp}	Splitting failure:	[mm]	288	300	350	425/510 ¹⁾	500/600 ¹⁾	560
c _{cr,sp}		[mm]	144	150	175	213/255 ¹⁾	250/300 ¹⁾	280

¹⁾ Respective values for anchors MTP / MTP-G, MTP-X

MTP, MTP-G, MTP-X anchor

Performances

Essential characteristics under static or quasi-static tension loads

Annex C3

Table C4: Essential characteristics under static or quasi-static tension loads according to design method A according to EN 1992-4 for MTP-A4 anchor

Essential characteristics under static or quasi-static tension loads according to design method A			Performances				
			M8	M10	M12	M16	M20
Tension loads: steel failure							
$N_{Rk,s}$	Characteristic resistance:	[kN]	18.5	30.9	45.5	71.5	122.5
γ_{Ms}	Partial safety factor:	[-]	1.4	1.4	1.4	1.4	1.4
Tension loads: pull-out failure in concrete							
$N_{Rk,p,ucr}$	Characteristic resistance in C20/25 uncracked concrete:	[kN]	12	16	22	-- ¹⁾	-- ¹⁾
ψ_c	Increasing factor for $N_{Rk,p}^0$:	C30/37	1.22	1.22	1.22	1.22	1.09
		C40/50	1.41	1.41	1.41	1.41	1.16
		C50/60	1.58	1.58	1.58	1.58	1.22
$N_{Rk,p,cr}$	Characteristic resistance in C20/25 cracked concrete:	[kN]	8.5	14	19	-- ¹⁾	-- ¹⁾
ψ_c	Increasing factor for $N_{Rk,p}^0$:	C30/37	1.01	1.00	1.09	1.09	1.17
		C40/50	1.02	1.00	1.15	1.16	1.32
		C50/60	1.02	1.00	1.20	1.22	1.44
γ_{ins}	Installation safety factor:	[-]	1.0	1.0	1.2	1.2	1.2
Tension loads: concrete cone and splitting failure							
h_{ef}	Effective embedment depth:	[mm]	48	60	70	85	100
$k_{ucr,N}$	Factor for uncracked concrete:	[-]	11.0				
$k_{cr,N}$	Factor for cracked concrete:	[-]	7,7				
γ_{ins}	Installation safety factor:	[-]	1.0	1.0	1.2	1.2	1.2
$s_{cr,N}$	Concrete cone failure:	[mm]	3 x h_{ef}				
$c_{cr,N}$		[mm]	1.5 x h_{ef}				
$s_{cr,sp}$	Splitting failure:	[mm]	164	204	238	290	380
$c_{cr,sp}$		[mm]	82	102	119	145	190

1) Pull out failure is not decisive

MTP-A4 anchor

Performances

Essential characteristics under static or quasi-static tension loads

Annex C4

Table C5: Essential characteristics under static or quasi-static shear loads of design method A according to EN 1992-4 for MTP, MTP-G, MTP-X anchor

Essential characteristics under static or quasi-static shear loads according to design method A			Performances					
			M8	M10	M12	M16	M20	M24
Shear loads: steel failure without lever arm								
V _{Rk,s}	Characteristic resistance:	[kN]	11.0	17.4	25.3	47.1	73.1	84.7
k ₇	Ductility factor:	[-]	1.00					
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	1.25
Shear loads: steel failure with lever arm								
M ⁰ _{Rk,s}	Characteristic bending moment:	[Nm]	22.5	44.8	78.6	199.8	389.4	673.5
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	1.25
Shear loads: concrete pryout failure								
k ₈	Pryout factor:	[-]	1	2	2	2	2	2
γ _{ins}	Installation safety factor:	[-]	1.00					
Shear loads: concrete edge failure								
l _f	Effective length of anchor under shear loads:	[mm]	48	60	70	85	100	125
d _{nom}	Outside anchor diameter:	[mm]	8	10	12	16	20	24
γ _{ins}	Installation safety factor:	[-]	1.00					

Table C6 Essential characteristics under static or quasi-static shear loads of design method A according to EN 1992-4 for MTP-A4 anchor

Essential characteristics under static or quasi-static shear loads according to design method A			Performances				
			M8	M10	M12	M16	M20
Shear loads: steel failure without lever arm							
V _{Rk,s}	Characteristic resistance:	[kN]	11.9	18.9	27.4	55.0	85.9
k ₇	Ductility factor:	[-]	1.00				
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25
Shear loads: steel failure with lever arm							
M ⁰ _{Rk,s}	Characteristic bending moment:	[Nm]	26.2	52.3	91.7	233.1	454.3
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25
Shear loads: concrete pryout failure							
k ₈	Pryout factor:	[-]	1	2	2	2	2
γ _{ins}	Installation safety factor:	[-]	1.00				
Shear loads: concrete edge failure							
l _f	Effective length of anchor under shear loads:	[mm]	48	60	70	85	100
d _{nom}	Outside anchor diameter:	[mm]	8	10	12	16	20
γ _{ins}	Installation safety factor:	[-]	1.00				

MTP, MTP-G, MTP-X, MTP-A4 anchor

Performances

Essential characteristics under static or quasi-static shear loads

Annex C5

Table C7: Displacements under tension loads for MTP, MTP-G, MTP-X, MTP-A4 anchor

Displacements under tension loads			Performances					
			M8	M10	M12	M16	M20	M24
MTP anchor								
N	Service tension load:	[kN]	2.5	4.3	6.3	10.4	13.9	18.0
δ_{N0}	Short term displacement:	[mm]	1.1	0.7	1.0	0.4	1.6	0.4
$\delta_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	2.0
MTP-G anchor								
N	Service tension load:	[kN]	2.5	4.3	6.3	10.4	13.9	--
δ_{N0}	Short term displacement:	[mm]	1.0	1.1	0.9	1.5	1.2	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	--
MTP-X anchor								
N	Service tension load:	[kN]	2.5	4.3	7.6	11.9	14.3	--
δ_{N0}	Short term displacement:	[mm]	1.0	1.1	0.9	1.5	1.3	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.6	1.6	1.6	1.6	1.6	--
MTP-A4 anchor								
N	Service tension load in non cracked concrete:	[kN]	5.7	7.6	8.7	15.3	19.5	--
δ_{N0}	Short term displacement:	[mm]	1.4	1.4	1.4	1.8	1.8	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	--
MTP-A4 anchor								
N	Service tension load in cracked concrete:	[kN]	4.0	6.7	7.5	10.7	13.7	--
δ_{N0}	Short term displacement:	[mm]	1.2	1.3	1.3	1.3	1.3	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.7	1.7	1.7	1.7	1.7	--

Table C8: Displacements under shear load for MTP, MTP-G, MTP-X, MTP-A4 anchor

Displacements under shear loads			Performances					
			M8	M10	M12	M16	M20	M24
MTP anchor								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	33.6
δ_{V0}	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	1.4
$\delta_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	2.1
MTP-G anchor								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	-
δ_{V0}	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	--
$\delta_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	--
MTP-X anchor								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	--
δ_{V0}	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	--
$\delta_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	--
MTP-A4 anchor								
V	Service shear load:	[kN]	6.8	10.8	15.7	31.4	46.9	--
δ_{V0}	Short term displacement:	[mm]	1.9	1.6	1.6	2.2	2.2	--
$\delta_{V\infty}$	Long term displacement:	[mm]	2.4	2.4	2.4	3.3	3.3	--

MTP, MTP-G, MTP-X, MTP-A4 anchor

Performances

Displacements under static or quasi-static tension and shear loads

Annex C6

Table C9: Essential characteristics for seismic performance category C1 MTP, MTP-X anchor

Essential characteristics for seismic performance category C1			Performances					
			M8	M10	M12	M16	M20	M24
Steel failure for tension and shear failure								
$N_{Rk,s,C1}$	Characteristic tension steel failure:	[kN]	18.1	31.4	40.4	72.7	116.6	--
$\gamma_{Ms,N}$	Partial safety factor:	[-]	1.5	1.5	1.5	1.5	1.5	--
$V_{Rk,s,C1}$	Characteristic shear steel failure:	[kN]	7.7	12.2	17.8	33.0	58.5	--
$\gamma_{Ms,V}$	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	--
Pull out failure								
MTP anchor								
$N_{Rk,p,C1}$	Characteristic pull out failure:	[kN]	--	5.3	8.4	17.5	--	--
MTP-X anchor								
$N_{Rk,p,C1}$	Characteristic pull out failure:	[kN]	5.9	8.9	16.0	25.0	30.0	--
γ_{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	--
Concrete cone failure								
h_{ef}	Effective embedment depth:	[mm]	48	60	70	85	100	--
$s_{cr,N}$	Spacing:	[mm]	3 x h_{ef}					--
$c_{cr,N}$	Edge distance:	[mm]	1.5 x h_{ef}					--
γ_{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	--
Concrete pryout failure								
k_8	Pryout factor:	[-]	1	2	2	2	2	--
Concrete edge failure								
l_f	Effective length of anchor:	[mm]	48	60	70	85	100	--
d_{nom}	Outside anchor diameter:	[-]	8	10	12	16	20	--

MTP, MTP-X anchor

Performances

Essential characteristics for seismic performance category C1

Annex C7