



XFOAM™ PRO

CLEANER

PRODUCT DATA

HPU-B XFOAM™ PRO Cleaner 500ml

Description


Cleaner for removing fresh polyurethane foam and adhesives.

| Applications |
|---|
| <ul style="list-style-type: none"> Removes tar, grease, oils, waxes, fresh sealants and adhesive residues Degreases steel, iron, chromium, aluminium, anodised aluminium, unvarnished wood and marble (stone) |

| Features |
|--|
| <ul style="list-style-type: none"> Removes fresh polyurethane foam and adhesives For cleaning the gun and manual cleaning of workplace and instruments Transparent and soluble in water Hardened foam can only be mechanically removed from the gun and other surfaces |

| | |
|----------|---|
| Material |  PU FOAM CLEANER |
|----------|---|

| | |
|--------|---|
| Finish |  PU FOAM CLEANER |
|--------|---|

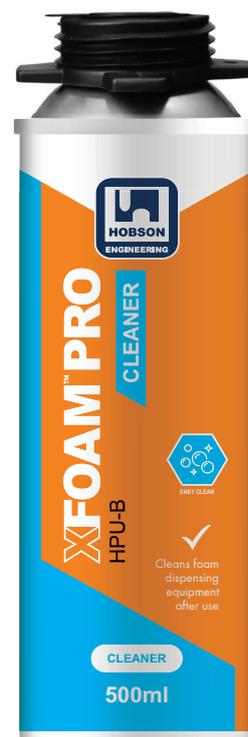

EASY CLEAN



Cleans foam dispensing equipment after use



CONSTRUCT

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.



XFOAM™ PRO

CLEANER

Instructions

For manual cleaning, use the attached spray cap mounted on the spray adaptor. Initiate the outflow of the cleaner by pressing the cap. Saturate a linen cloth or colourless paper in the cleaner and clean the surface. Repeat with a fresh cloth. For gun cleaning, screw the can with the adaptor onto the gun. Carefully pull the trigger of the gun to remove any foam residues from the gun. Once the cleaner starts to come out, release the trigger. Leave the cleaner to work inside the gun for 1–2 minutes. Pull the trigger again and hold it until unblemished cleaner starts to come out. Repeat the procedure 2–3 times each time the gun is cleaned.

CAUTION: the cleaner may cause damage to lacquered or painted surfaces, textiles and plastics.



Packaging

500 ml aerosol can.

Storage

36 months (from 5–25°C [41–77°F]) or at lower temperatures for shorter periods of time (e.g. during transport). Higher temperatures shorten storage life. Store the cans in an upright position.

Health, safe handling and disposal information

Additional information on safety, safe handling instructions, personal protective equipment and disposal information is in a safety data sheet. Safety data sheets are available at hobson.com.au

Warning

Instructions contained in this document are based on our research and experience. However, due to specific conditions and working methods, we recommend that you perform preliminary tests prior to any application of our products.



DANGER

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.