



PRODUCT DATA

Aluminium Packing Shims

The easy solution for packing, levelling and spacing.

| Applications | Trades |
|---|---|
| <ul style="list-style-type: none"> Packers and spacers for steel connections, facades, and door and window installations Use in high temperatures | <ul style="list-style-type: none"> Window installers Cladding and weatherboard installers |

| | |
|-----------------|-----------|
| Material | Aluminium |
|-----------------|-----------|


| | |
|---------------|-----------|
| Finish | Aluminium |
|---------------|-----------|



| Part | QFind | Thickness | Overall Length | Overall Width | Gap Dimension | Pack Qty |
|-------------|---------------|-----------|----------------|---------------|---------------|----------|
| | | T (mm) | L (mm) | W (mm) | GD (mm) | |
| MPWAL075010 | MPW800 | 1.0 | 75 | 40 | 16 | 50 |
| MPWAL075020 | MPW810 | 2.0 | 75 | 40 | 16 | 50 |
| MPWAL075030 | MPW812 | 3.0 | 75 | 40 | 16 | 50 |
| MPWAL075050 | MPW815 | 5.0 | 75 | 40 | 16 | 50 |
| MPWAL075100 | MPW820 | 10.0 | 75 | 40 | 16 | 50 |

Features

- High corrosion resistance for marine applications
- Lightweight
- Excellent weldability
- Fire resistance
- 25-tonne compression working load
- Hardness: Brinell 75 HB, Vickers 80 HV

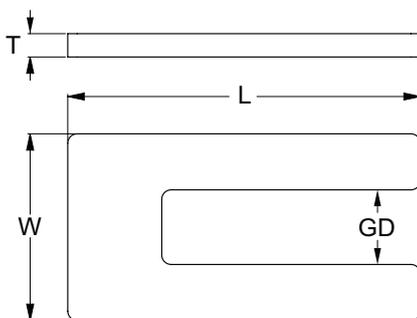

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**





PRODUCT DATA


Aluminium Packing Shims

The easy solution for packing, levelling and spacing.

| Applications | Trades |
|---|---|
| <ul style="list-style-type: none"> Packers and spacers for steel connections, facades, and door and window installations Use in high temperatures | <ul style="list-style-type: none"> Window installers Cladding and weatherboard installers |

| | |
|-----------------|-----------|
| Material | Aluminium |
|-----------------|-----------|


| | |
|---------------|-----------|
| Finish | Aluminium |
|---------------|-----------|

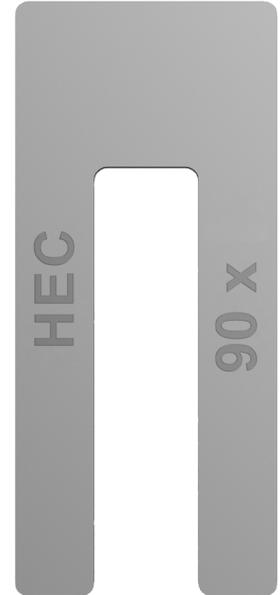

| Part | QFind | Thickness | Overall Length | Overall Width | Gap Dimension | Pack Qty |
|-------------|---------------|-----------|----------------|---------------|---------------|----------|
| | | T (mm) | L (mm) | W (mm) | GD (mm) | |
| MPWAL090010 | MPW830 | 1.0 | 90 | 40 | 16 | 50 |
| MPWAL090020 | MPW835 | 2.0 | 90 | 40 | 16 | 50 |
| MPWAL090030 | MPW840 | 3.0 | 90 | 40 | 16 | 50 |
| MPWAL090050 | MPW845 | 5.0 | 90 | 40 | 16 | 50 |
| MPWAL090100 | MPW850 | 10.0 | 90 | 40 | 16 | 50 |

Features

- High corrosion resistance for marine applications
- Lightweight
- Excellent weldability
- Fire resistance
- 25-tonne compression working load
- Hardness: Brinell 75 HB, Vickers 80 HV

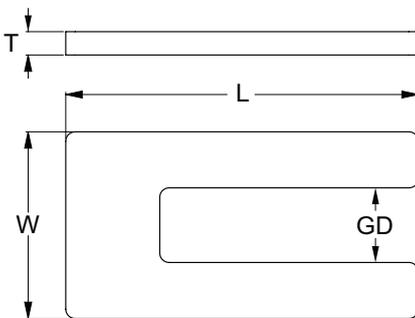

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**





PRODUCT DATA

Aluminium Packing Shims


The easy solution for packing, levelling and spacing.

| Applications | Trades |
|---|---|
| <ul style="list-style-type: none"> Packers and spacers for steel connections, facades, and door and window installations Use in high temperatures | <ul style="list-style-type: none"> Window installers Cladding and weatherboard installers |

| | |
|-----------------|-----------|
| Material | Aluminium |
|-----------------|-----------|

| | |
|---------------|-----------|
| Finish | Aluminium |
|---------------|-----------|

| Part | QFind | Thickness | Overall Length | Overall Width | Gap Dimension | Pack Qty |
|-------------|---------------|-----------|----------------|---------------|---------------|----------|
| | | T (mm) | L (mm) | W (mm) | GD (mm) | |
| MPWAL140010 | MPW860 | 1.0 | 140 | 40 | 16 | 50 |
| MPWAL140020 | MPW865 | 2.0 | 140 | 40 | 16 | 50 |
| MPWAL140030 | MPW870 | 3.0 | 140 | 40 | 16 | 50 |
| MPWAL140050 | MPW875 | 5.0 | 140 | 40 | 16 | 50 |
| MPWAL140100 | MPW880 | 10.0 | 140 | 40 | 16 | 50 |

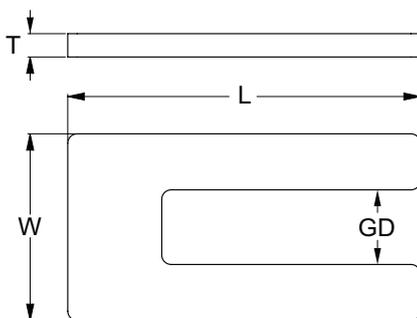

Features

- High corrosion resistance for marine applications
- Lightweight
- Excellent weldability
- Fire resistance
- 25-tonne compression working load
- Hardness: Brinell 75 HB, Vickers 80 HV



Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

