

PRODUCT DATA

BDX Metal SDS Hex Head and Washer

Page 1 of 3

Applications

- Metal to metal fixing
- Wall cladding
- Sheds
- Valley fixing
- Fencing and gates
- Hinges to metal post, gate and doors

Material



C1022 Hardened

Finish



X9 Coating




10 Gauge Hex Head


X9 ProteXion coating
is suitable for ISO 9223
Category 4 environments.



Dimensions

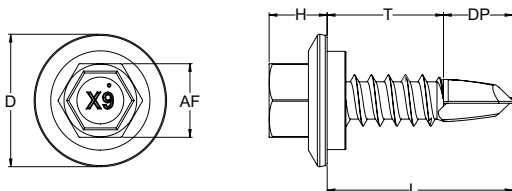

Part	QFind	Gauge	TPI	Length	Thread Length	Drill Point Length	Head Height	Head ø	Drive Size
				L (mm)	T (mm)	DP (mm)	H (mm)	D (mm)	AF (inch)
T9PM9SH1016016	QH275	10	16	16	9.8	6.2	5	11	HEX 5/16
T9PM9SH1016025	QH280	10	16	25	18.8	6.2	5	11	HEX 5/16

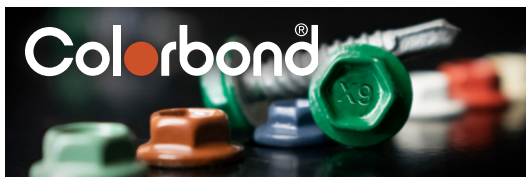

Refer to our documents
online for a complete
list of available
Colorbond® colours.

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

PRODUCT DATA

BDX Metal SDS Hex Head and Washer

Page 2 of 3

Pullout Values

Plate (Purlin)	Metal Plate Thickness	¹ Mean Load	² Characteristic Load	³ Working Load
	(mm)	(N)	(N)	(N)
G2	0.7	950	900	350
G2	1.1	1850	1600	650
G550	1.5	4000	3600	1450
G450	2.0	5250	4850	1950
G450	2.5	7150	6300	2500

Mechanical Properties

Torsional Strength	¹ Mean Tensile Strength	¹ Mean Shear Strength	² Characteristic Tensile Strength	² Characteristic Shear Strength
(Nm)	(N)	(N)	(N)	(N)
6.9	12700	7600	11550	6950

Drill Point Test

Plate (Purlin)	Metal Plate Thickness	Load	Drill Speed	Drill Time	Drill Time
	(mm)	(kg)	(RPM)	(Max. individual) Seconds	(Max. average) Seconds
G450	2	18	2200	4	3

Note: 1000N = 1kN

¹ Mean Load/Strength is the average ultimate strength of samples tested.

² Characteristic Load/Strength: 95% of these screws are expected to have a strength greater than the loads shown.

³ Working Load is the governing minimum allowable load obtained by comparing relevant concrete and steel working loads. Factor of Safety (FOS=2.5 for steel, FOS=2.5 for timber and FOS=3.0 for concrete) are already included.

All values are obtained under laboratory conditions. Safety factors should be considered for design purposes. Actual pullout loads may differ slightly depending on certain properties of the base material.

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

PRODUCT DATA

BDX Metal SDS Hex Head and Washer

Page 3 of 3

Installation

1. Use a cordless screw gun set between 2,200–3,000 RPM. Fit the HEX Drive Bit over the screw and place at the fastening position.
2. Apply consistently firm pressure to the screw driver while the screw is drilling.
3. Care should be taken not to over-tighten the screw.

*Installation with impact drivers not recommended.

Recommended for use with:

MAGNETIC NUT SETTER S2 ALLOY STEEL BLACK / impaX DRIVE BIT 1/4		
Part	QFind	Length
		(mm)
TXDIPNSS31045	BA18	45
TXDIPNSS31065	B090	65



Recommended
HEX 5/16 Magnetic
Nut Setter

MAGNETIC NUT SETTER S2 ALLOY STEEL BLACK / STANDARD DRIVE BIT 1/4		
Part	QFind	Length
		(mm)
TXDDPNSS31045	B025	45
TXDDPNSS31065	B050	65
TXDDPNSS31100	B060	100
TXDDPNSS31150	B075	150



Recommended
HEX 5/16 Magnetic
Nut Setter

SPRING NUT SETTER S2 ALLOY STEEL BLACK / impaX DRIVE BIT 1/4		
Part	QFind	Length
		(mm)
TXDIPSS31065	BA48	65
TXDIPSS31150	BA49	150



Recommended
HEX 5/16 Spring
Nut Setter

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**