



# PRODUCT DATA

## Bi-Metal SDS Flanged Hex Head


### Self Drilling Screw (SDS) #10-16

Applications	
<ul style="list-style-type: none"> <li>• Metal to metal fixing</li> <li>• Ideal for corrosive conditions</li> <li>• Cladding metal sheets</li> <li>• Signs, fences, and sheds</li> </ul>	

<b>Material</b>	<b>B304</b> Bi-Metal 304 Stainless
-----------------	------------------------------------

<b>Finish</b>	<b>R10</b> R1000 Hours Protective Coating
---------------	---

## 10 Gauge Hex Head

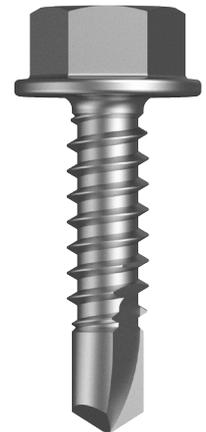

Pullout Values				
Plate (Purlin)	Metal Plate Thickness	<sup>1</sup> Mean Load	<sup>2</sup> Characteristic Load	<sup>3</sup> Working Load
	(mm)	(N)	(N)	(N)
G2	0.7	950	850	350
G2	1.0	1700	1400	550
G550	1.5	3650	3450	1400
G450	2.0	4950	4550	1800
G450	2.5	7150	6450	2600



Drill Point Test					
Plate (Purlin)	Metal Plate Thickness	Load	Drill Speed	Drill Time	Drill Time
	(mm)	(kg)	(RPM)	(Max. individual) Seconds	(Max. average) Seconds
G450	2.0	18	2200	4	3

Mechanical Properties				
Torsional Strength	<sup>1</sup> Mean Tensile Strength	<sup>1</sup> Mean Shear Strength	<sup>2</sup> Characteristic Tensile Strength	<sup>2</sup> Characteristic Shear Strength
(Nm)	(N)	(N)	(N)	(N)
6.9	9750	5850	9450	5650

Note: 1000N = 1kN

<sup>1</sup> Mean Load/Strength is the average ultimate strength of samples tested.

<sup>2</sup> Characteristic Load/Strength: 95% of these screws are expected to have a strength greater than the loads shown.

<sup>3</sup> Working Load is the governing minimum allowable load obtained by comparing relevant concrete and steel working loads. Factor of Safety (FOS=2.5 for steel, FOS=2.5 for timber and FOS=3.0 for concrete) are already included.

All values are obtained under laboratory conditions using DRILLX product. Safety factors should be considered for design purposes. Actual pullout loads may differ slightly depending on certain properties of the base material.

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.



Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**







# PRODUCT DATA

## Bi-Metal SDS Flanged Hex Head

Part	QFind	Gauge	TPI	Length	Thread Length	Drill Point Length	Head Height	Head ø	Drive Size	Pack Qty
				L (mm)	T (mm)	DP (mm)	H (mm)	D (mm)	AF (inch)	
T4XMXHH1016019	QB01	10	16	19	13.5	5.5	0.7-1.0	11	HEX 5/16"	500
T4XMXHH1016045	QB18			45	39.5					

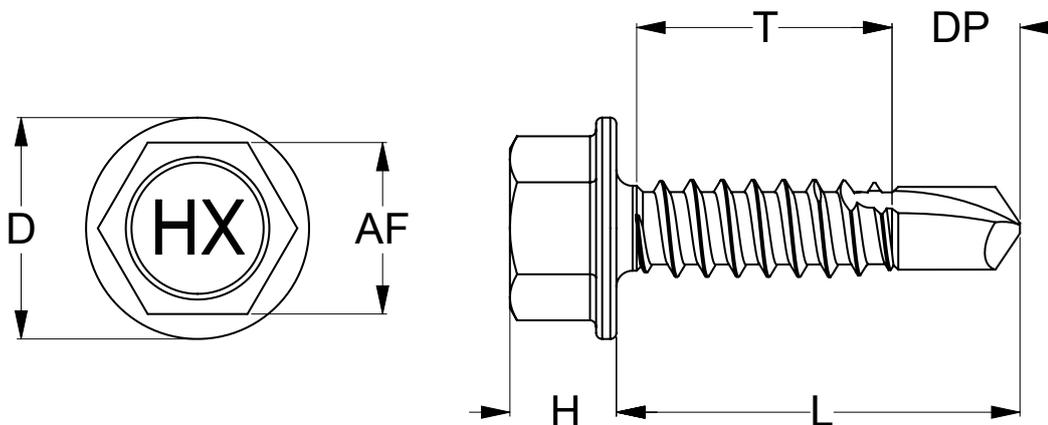

### Installation

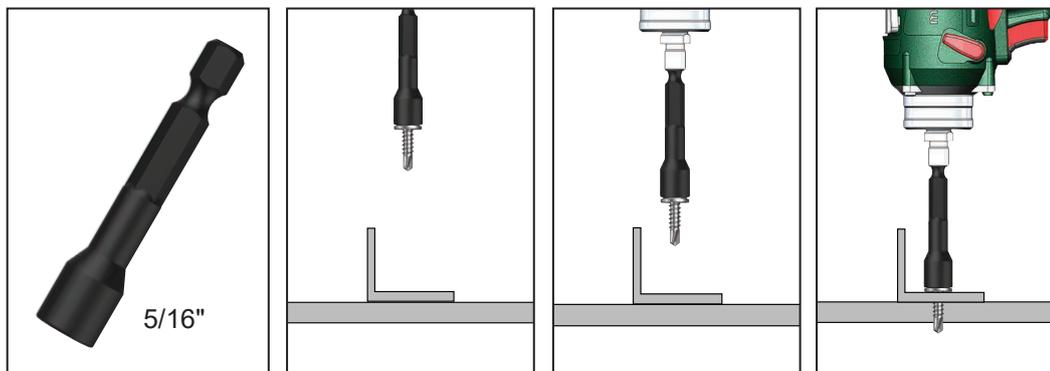

Recommended  
HEX 5/16 inch Drive Bit:

Part	QFind	Length (mm)
TXDIPNSS31045	BA18	45
TXDIPNSS31065	B090	65

### Installation Guide

1. Use a cordless screw driver set between 2,200-3,000 RPM. Fit the HEX Drive Bit over the screw and place at the fastening position.
2. Apply consistently firm pressure to the screw driver while the screw is drilling.
3. Care should be taken not to over-tighten the screw.

\*Installation with impact drivers not recommended.

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**

