



PRODUCT DATA

Bi-Metal S500 SDS Flanged Hex Head

Page 1 of 2

Self Drilling Screw (SDS) #12-24

Applications

- Metal to metal fixing
- Cladding metal sheets
- Signs, fences and sheds
- Thick steel purlins and hot rolled steel
- Plumbing, steel fabrication and HVAC systems
- Ideal for corrosive conditions

Material



Bi-Metal 304 Stainless

Finish

R1000 Hours
Protective Coating

12 Gauge Hex Head with S500 Extended Drill Point



Pullout Values

Plate (Purlin)	Metal Plate Thickness	¹ Mean Load	² Characteristic Load	³ Working Load
	(mm)	(N)	(N)	(N)
G2	3.0	5100	4300	1700
HRS	5.0	11200	9950	4000
HRS	6.0	11750	10950	4400
HRS	8.0	11950	11500	4600



Drill Point Test

Plate (Purlin)	Metal Plate Thickness	Load	Drill Speed	Drill Time	Drill Time
	(mm)	(kg)	(RPM)	(Max. individual) Seconds	(Max. average) Seconds
CRS	8	27	2200	10	7

Mechanical Properties

Torsional Strength	¹ Mean Tensile Strength	¹ Mean Shear Strength	² Characteristic Tensile Strength	² Characteristic Shear Strength
(Nm)	(N)	(N)	(N)	(N)
11.3	12500	7500	12300	7400

Note: 1000N = 1kN

¹ Mean Load/Strength is the average ultimate strength of samples tested.² Characteristic Load/Strength: 95% of these screws are expected to have a strength greater than the loads shown.³ Working Load is the governing minimum allowable load obtained by comparing relevant concrete and steel working loads. Factor of Safety (FOS=2.5 for steel, FOS=2.5 for timber and FOS=3.0 for concrete) are already included.

All values are obtained under laboratory conditions using DRILLX product. Safety factors should be considered for design purposes. Actual pullout loads may differ slightly depending on certain properties of the base material.



Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**




PRODUCT DATA


Bi-Metal S500 SDS Flanged Hex Head

Page 2 of 2

Part	QFind	Gauge	TPI	Length	Thread Length	Drill Point Length	Head Height	Head ø	Drive Size
				L (mm)	T (mm)	DP (mm)	H (mm)	D (mm)	AF (inch)
T4X5XFH1224044	QB11	12	24	44	29	15	5.5	14	HEX 5/16"
T4X5XFH1224050	Q949			50	35				
T4X5XFH1224065	QB12			65	50				
T4X5XFH1224080	Q950			80	65				

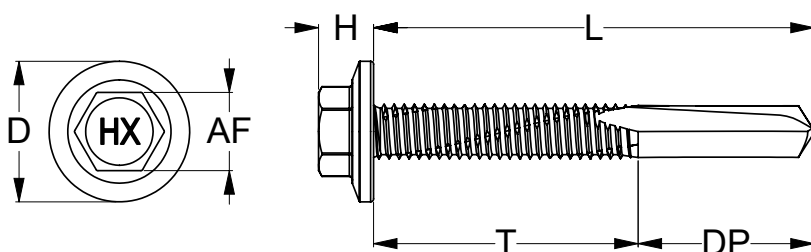

Installation

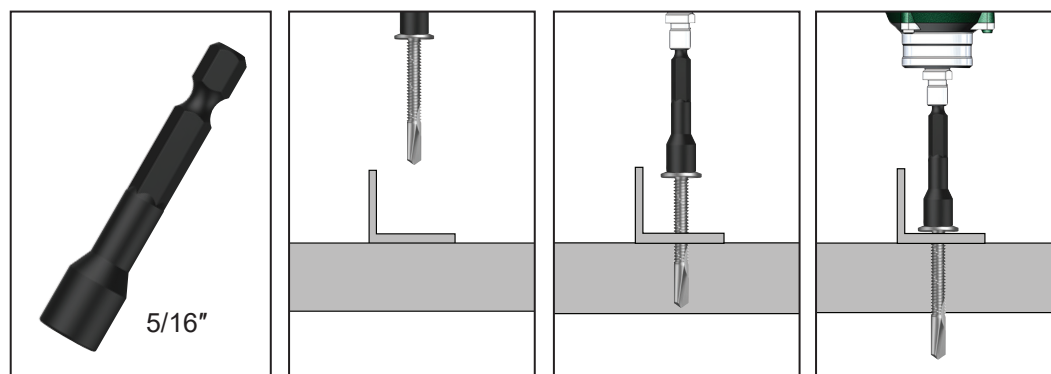

Recommended
HEX 5/16 inch Drive Bit:

Part	QFind	Length
		(mm)
TXDIPNSS31045	BA18	45
TXDIPNSS31065	B090	65

Installation Guide

1. Use a cordless screw driver set between 2,200-3,000 RPM. Fit the HEX Drive Bit over the screw and place at the fastening position.
2. Apply consistently firm pressure to the screw driver while the screw is drilling.
3. Care should be taken not to over-tighten the screw.

*Installation with impact drivers not recommended.

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**