


# PRODUCT DATA

## Metal Stitching Screw Flange Hex Head with Seal

### Self Drilling Needle Point Screw (SDS) #10-12


Applications	
<ul style="list-style-type: none"> <li>• General fixing lightweight steel</li> <li>• Sheet metal stitching</li> <li>• Thin gauge sheet steel</li> </ul>	

<b>Material</b>	 C1022 Hardened
-----------------	--

<b>Finish</b>	 Class 4
---------------	--

Pullout Values				
Plate (Purlin)	Metal Plate Thickness	<sup>1</sup> Mean Load	<sup>2</sup> Characteristic Load	<sup>3</sup> Working Load
	(mm)	(N)	(N)	(N)
G550	0.55	1150	1000	400

## 10 Gauge Flange Hex Head with Seal

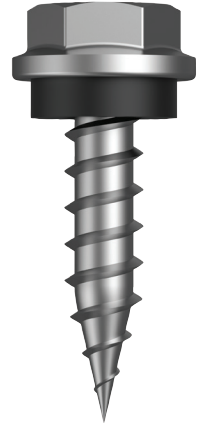

Drill Point Test					
Plate (Purlin)	Metal Plate Thickness	Load	Drill Speed	Drill Time	Drill Time
	(mm)	(kg)	(RPM)	(Max. individual) Seconds	(Max. average) Seconds
G550	0.55	13	2200	1.5	1.0

Mechanical Properties				
Torsional Strength	<sup>1</sup> Mean Tensile Strength	<sup>1</sup> Mean Shear Strength	<sup>2</sup> Characteristic Tensile Strength	<sup>2</sup> Characteristic Shear Strength
(Nm)	(N)	(N)	(N)	(N)
5.4	9300	5600	6800	4100

Note: 1000N = 1kN

<sup>1</sup> Mean Load/Strength is the average ultimate strength of samples tested.

<sup>2</sup> Characteristic Load/Strength: 95% of these screws are expected to have a strength greater than the loads shown.

<sup>3</sup> Working Load is the governing minimum allowable load obtained by comparing relevant concrete and steel working loads. Factor of Safety (FOS=2.5 for steel, FOS=2.5 for timber and FOS=3.0 for concrete) are already included.

All values are obtained under laboratory conditions using DRILLX product. Safety factors should be considered for design purposes. Actual pullout loads may differ slightly depending on certain properties of the base material.



Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**







# PRODUCT DATA

## Metal Stitching Screw Flange Hex Head with Seal

Part	QFind	Gauge	TPI	Length/Thread Length	Head Height	Head ø	Drive Size	Pack Qty
				L (mm)	H (mm)	D (mm)	AF (inch)	
T9PN4SH1012020	<b>Q151</b>	10	12	20	4.8	11.4	Hex 5/16"	1000

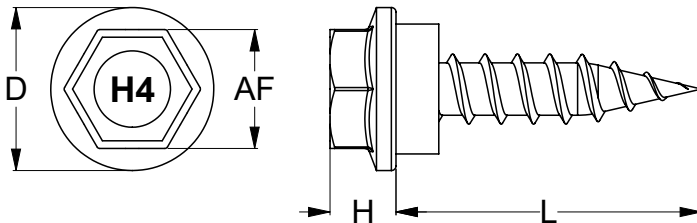

### Installation

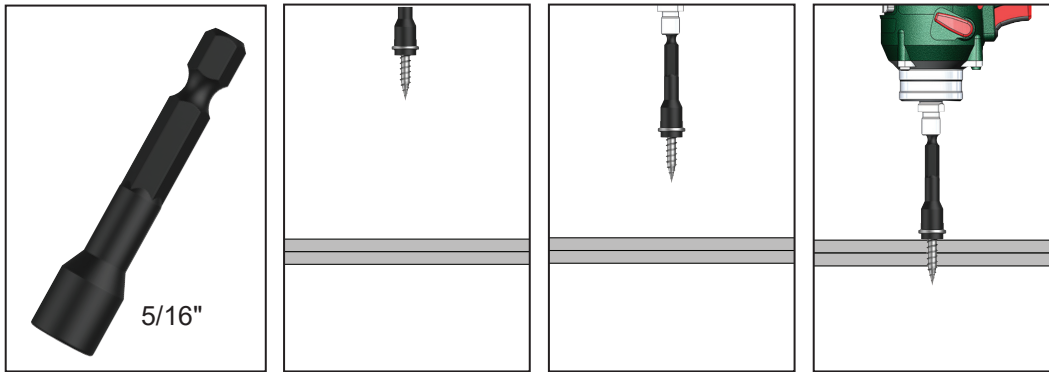

#### Recommended Hex 5/16" Drive Bit:

Part	QFind	Length (mm)
TXDIPNSS31045	BA18	45
TXDIPNSS31065	B090	65

#### Installation Guide

1. Use a cordless screw driver set at max 2,500 RPM. Fit the HEX Drive Bit over the screw and place at the fastening position.
2. Apply consistently firm pressure to the screw driver while the screw is drilling.
3. Care should be taken not to over-tighten the screw.

\*Installation with impact drivers not recommended.

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**

