



PRODUCT DATA

HUP Nyloc Hex Nut Brown Ring


J. LANFRANCO

LOCKNUTS FOR CRITICAL BOLTED JOINTS

ISO 7040

Applications

- Mining and processing
- Railway and transportation
- Energy
- Military
- Industrial

Features

- Temperature resistant nylon for use in high temperature applications

Material



Class 10

Finish






Zinc Flake Silver

Part	D	pitch	H - min.	H - max.	M - min.	S	E
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
NJ10FHUPM08	M8	1.25	8.92	9.50	6.44	13.00	14.38
NJ10FHUPM10	M10	1.50	11.20	11.90	8.04	16.00	17.77
NJ10FHUPM12	M12	1.75	14.20	14.90	10.37	18.00	20.03
NJ10FHUPM16	M16	2.00	17.80	19.10	14.10	24.00	26.75
NJ10FHUPM20	M20	2.50	20.70	22.80	16.90	30.00	32.95

Range of application

Standard Ring	Brown Ring
- 40° C + 120° C	- 40° C + 230° C

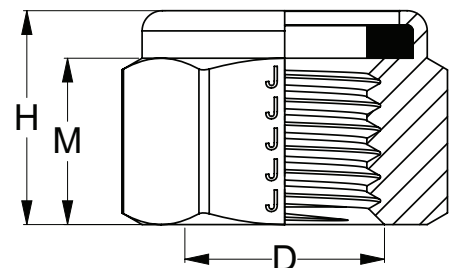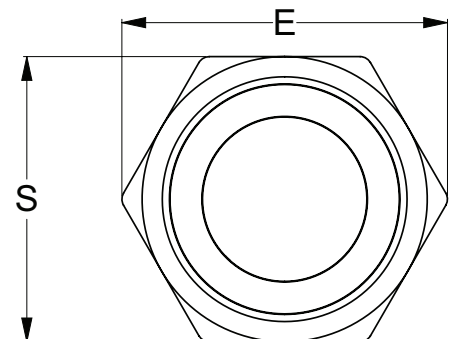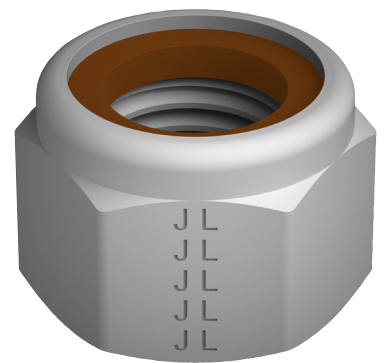

Disclaimer: while every reasonable efforts has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS** SINCE 1935