



PRODUCT DATA

Grade 80 Clevis Safety Hook

Clevis safety hook locks when a load is applied to prevent the release of lifting slings.

Applications	
•	Use with Grade 80 lifting components
•	Lifting with chains and synthetic slings
•	Clevis fitting for direct connection to chain

Material	Grade 80
-----------------	----------

Finish	Powder Coat
---------------	-------------



Features

- Conforms to AS 3776
- 100% magnaflux crack detection
- Safety hook prevents components from releasing when being lifted
- Back lever releases hook




Part	QFind	Size	WLL	BL	Dimensions				
					A (mm)	B (mm)	K (mm)	H (mm)	L (mm)
ULHK08PSC-06	HSC6	6	1.12	4.48	7.5	28.0	96.0	20	131
ULHK08PSC-08	HSC8	8	2.00	8.00	9.5	35.0	118.5	24	160
ULHK08PSC-10	HSC10	10	3.15	12.60	12.0	45.0	144.0	28	194
ULHK08PSC-13	HSC13	13	5.30	21.20	15.0	54.0	181.5	41	251
ULHK08PSC-16	HSC16	16	8.00	32.00	17.5	60.5	216.0	50	302
ULHK08PSC-20	HSC20	20	12.50	50.00	25.0	74.5	239.0	62	342
ULHK08PSC-22	HSC22	22	15.00	60.00	25.5	80.0	276.0	65	391
ULHK08PSC-26	HSC26	26	21.20	84.80	30.0	99.0	312.0	74	448



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**

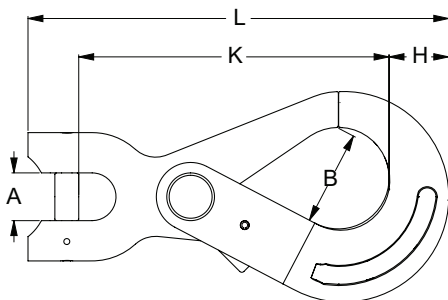

You can download this Test Certificate and/or Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

