



PRODUCT DATA

Grade 80 Master Link

Master link for single or double leg sling lifts with a variety of sling materials.

Applications	
• Use with Grade 80 lifting components	
• Lifting with G80 1 or 2 leg chain slings, wire rope and synthetic slings	


Material	Grade 80
-----------------	----------

Finish	Powder Coat
---------------	-------------



Features

- Conforms to AS 3776
- 100% magnaflux crack detection

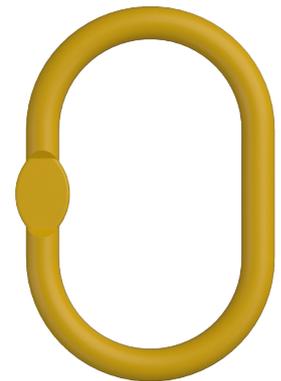


Part	QFind	Chain Size		WLL (tonne)	BL (tonne)	Dimensions				
		1 Leg (mm)	2 Leg (mm)			A (mm)	B (mm)	D (mm)	S (mm)	H (mm)
ULCL08PML-08	CML78	8	7	2.7	10.8	120	70	13	7	25
ULCL08PML-10	CML108	10	8	3.5	14.0	140	80	17	8	28
ULCL08PML-13	CML1310	13	10	5.5	22.0	160	95	20	11	35
ULCL08PML-16	CML1613	16	13	9.4	37.6	190	110	26	14	43
ULCL08PML-20	CML2016	20	16	14.2	56.8	230	130	32	17	55
ULCL08PML-22	CML2220	22	20	22.3	89.2	275	150	38	NA	NA
ULCL08PML-26	CML2622	26	22	33.5	134.0	340	180	45	NA	NA
ULCL08PML-32	CML3226	32	26	40.8	163.2	350	190	50	NA	NA
ULCL08PML-36	CML3632	36	32	56.9	227.6	400	200	56	NA	NA



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this Test Certificate and/or Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

