



# PRODUCT DATA

## Grade 80 Clevis Sling Hook

Self-locking clevis sling hook enables efficient and effective connection to lifting slings.

Applications	
•	Use with Grade 80 lifting components
•	Lifting with chains and synthetic slings

<b>Material</b>	Grade 80
-----------------	----------

<b>Finish</b>	Powder Coat
---------------	-------------




### Features

- Conforms to AS 3776
- 100% magnaflux crack detection
- Safety hook prevents components from releasing if line becomes slack



Part	QFind	Size	WLL	BL	Dimensions						
					A (mm)	B (mm)	E (mm)	M (mm)	H (mm)	L (mm)	K (mm)
ULHK08PLC-06	<b>HLC6</b>	6	1.12	4.48	7.50	32	22.0	74	20.5	121.0	85.0
ULHK08PLC-08	<b>HLC8</b>	8	2.00	8.00	9.50	36	25.0	83	23.5	137.0	94.0
ULHK08PLC-10	<b>HLC10</b>	10	3.15	12.60	12.00	46	34.0	107	30.0	172.5	120.0
ULHK08PLC-13	<b>HLC13</b>	13	5.30	21.20	15.00	59	41.5	134	37.5	210.5	145.0
ULHK08PLC-16	<b>HLC16</b>	16	8.00	32.00	17.50	70	46.0	158	42.5	248.0	170.0
ULHK08PLC-20	<b>HLC20</b>	20	12.50	50.00	23.00	80	52.0	189	54.0	309.0	216.5
ULHK08PLC-22	<b>HLC22</b>	22	15.00	60.00	25.50	98	60.0	239	76.0	375.5	252.0

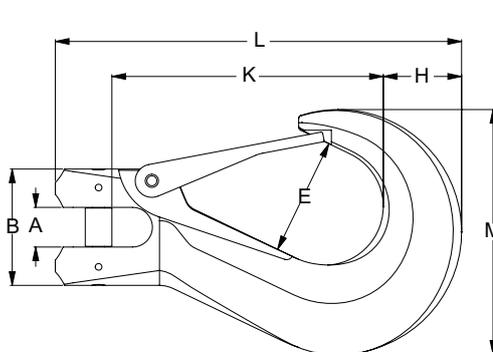

### MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this Test Certificate and/or Report from our website:

[hobson.com.au](http://hobson.com.au)

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**

