



PRODUCT DATA

Grade 80 Eye Sling Hook

Eye sling hook with self-locking latch can connect with coupler links or other lifting components.

Applications	
• Use with Grade 80 lifting components	
• Lifting with chains and synthetic slings	

Material	Grade 80
-----------------	----------

Finish	Powder Coat
---------------	-------------




Features

- Conforms to AS 3776
- 100% magnaflux crack detection
- Safety hook prevents components from releasing



Part	QFind	Size	WLL	BL	Dimensions				
					A	D	E	H	L
		(mm)	(tonne)	(tonne)	(mm)	(mm)	(mm)	(mm)	(mm)
ULHK08PLE-06	HLE6	6	1.12	4.48	20.0	9.0	22	20.5	122.0
ULHK08PLE-08	HLE8	8	2.00	8.00	25.5	11.5	26	23.5	138.5
ULHK08PLE-10	HLE10	10	3.15	12.60	32.5	13.5	34	30.0	176.5
ULHK08PLE-13	HLE13	13	5.30	21.20	39.5	18.0	41	37.0	218.0
ULHK08PLE-16	HLE16	16	8.00	32.00	50.0	23.0	44	42.5	260.0
ULHK08PLE-20	HLE20	20	12.50	50.00	60.0	26.5	52	54.5	310.0
ULHK08PLE-22	HLE22	22	15.00	60.00	68.0	31.5	60	76.0	357.5

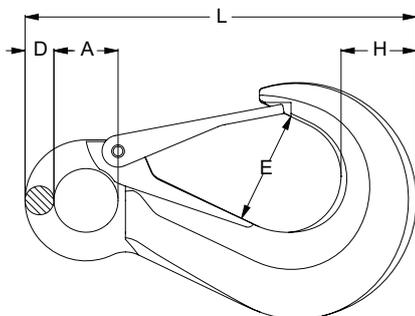

MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this Test Certificate and/or Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

