



PRODUCT DATA

Grade 80 Swivel Safety Hook

Safety hook locks while swivel action assists with aligning the load prior to lifting.

Applications	
•	Use with Grade 80 lifting components
•	Lifting with chains and synthetic slings

Material	Grade 80
-----------------	----------

Finish	Powder Coat
---------------	-------------




Features

- Conforms to AS 3776
- 100% magnaflux crack detection
- 360° swivel motion
- Safety hook prevents components from releasing when being lifted



Part	QFind	Size	WLL	BL	Dimensions						
					A (mm)	B (mm)	C (mm)	D (mm)	K (mm)	H (mm)	L (mm)
ULHK08PSS-06	HSS6	6	1.12	4.48	37.00	28.00	32.50	11.50	161.0	20	196.0
ULHK08PSS-08	HSS8	8	2.00	8.00	45.00	35.00	36.00	13.00	201.6	24	242.0
ULHK08PSS-10	HSS10	10	3.15	12.60	54.00	45.00	42.00	15.50	238.0	28	284.5
ULHK08PSS-13	HSS13	13	5.30	21.20	63.50	54.00	50.00	17.00	284.0	41	345.0
ULHK08PSS-16	HSS16	16	8.00	32.00	67.50	60.50	61.00	21.50	347.0	50	422.0

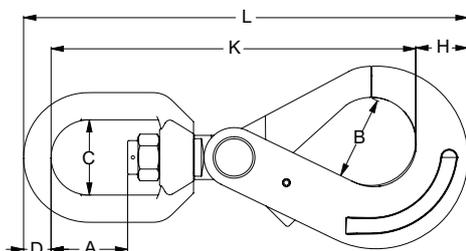

MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**



You can download this Test Certificate and/or Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

