

# Declaration of Performance

**2323-CPR-0058**

**1. Unique identification code of the product-type:** Deformation-controlled expansion anchor MEA for multiple use for non-structural applications in concrete

**2. Manufacturer:** Mungo Befestigungstechnik AG, Bornfeldstrasse 2, CH-4600 Olten - Switzerland

**3. System/s of AVCP:** System 2+

**4. Intended use or use/es:**

Product	Intended use
Metal anchor for use in non-structural applications in non-cracked and cracked concrete	The anchor is to be used for static or quasi-static loading in reinforced or unreinforced normal weight concrete of strength classes C20/25 to C50/60 according to EN 206-1

**5. European Assessment Document:** ETAG 001 – Part 6 (Used as EAD)

**European Technical Assessment:** ETA-18/0269 of 2018/04/03

**Technical Assessment Body:** ETA-Denmark A/S

**Notified body/ies:** 2323 (IEA) acc. No. 305/2011 (Construction Product Regulation)

**6. Declared performance:**

**Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic resistance for all load directions	See appendix, especially Annex C1 to C3
Installation parameters	See appendix, especially Annex B2

**Safety in case of fire (BWR 2)**

Essential characteristic	Performance
Resistance to fire	See appendix, especially Annex C4
Reaction to fire	See appendix, especially Annex C5

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:




Dipl.-Ing. Robert Klemencic  
Head of Engineering  
Olten, 2020-11-11



This DoP has been prepared in different languages. In case there is a dispute on the interpretation the English version shall always prevail. The Appendix includes voluntary and complementary information in English language exceeding the (language as neutrally specified) legal requirements.

**Figure A1 – anchor**

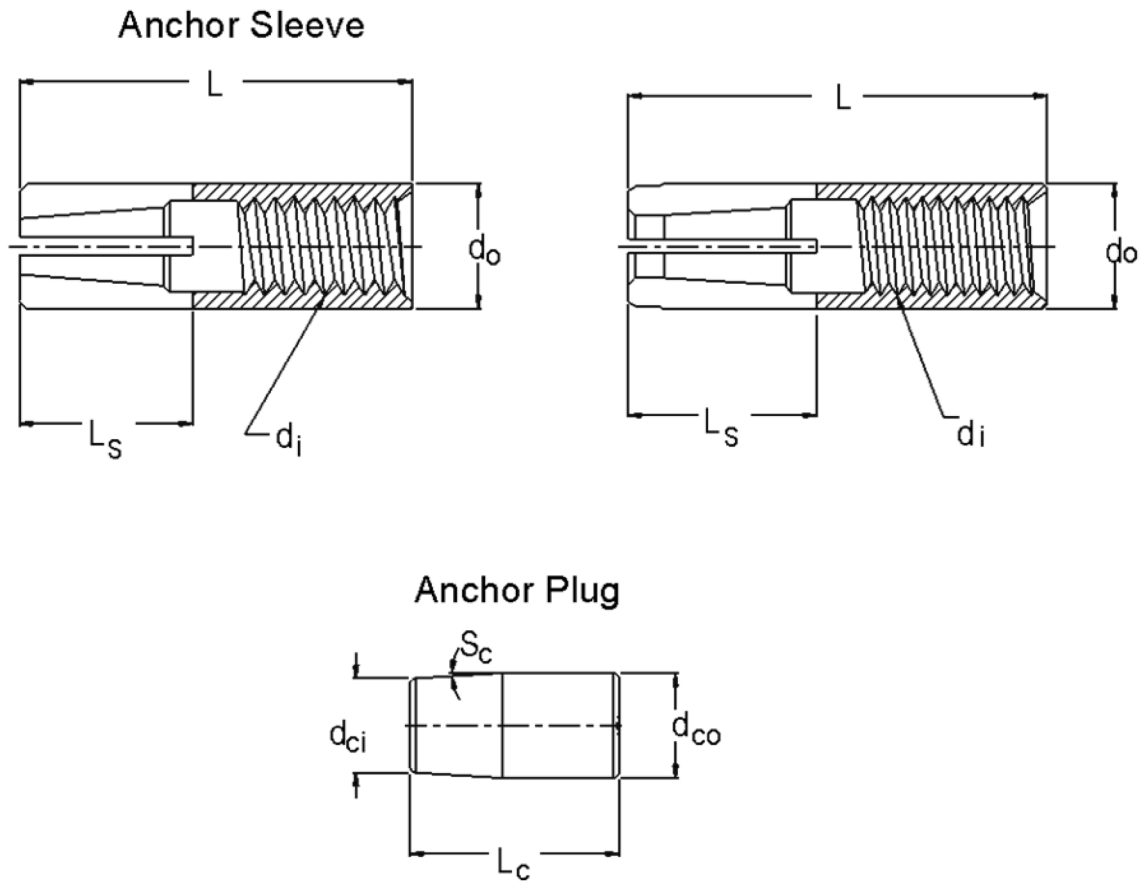

**MEA DROP-IN ANCHOR**

Product description  
Characteristics of the product

**Annex A1**  
of European  
Technical Assessment  
ETA-18/0269

**Table A1. Dimensions of the anchor**

Diameter inside $d_i$ [mm]	Length $L$ [mm]	Length of spread $L_s$ [mm]	Diameter outside $d_o$ [mm]	Length of cone $L_c$ [mm]	Diameter cone outside $d_{co}$ [mm]	Diameter cone inside $d_{ci}$ [mm]	square $s_c$ [°]
M6	24.90 ± 0.30	11.60 ± 0.60	7.94 ± 0.07	10.00 ± 0.20	5.05 ± 0.05	3.95 ± 0.05	5.00 ± 0.50
M8	29.90 ± 0.30	13.80 ± 0.60	9.94 ± 0.07	11.90 ± 0.30	6.25 ± 0.25	4.50 ± 0.25	6.00 ± 2.00
M10	39.60 ± 0.40	18.35 ± 0.75	11.94 ± 0.07	15.70 ± 0.30	7.85 ± 0.25	6.30 ± 0.30	6.00 ± 2.00
M12	50.50 ± 0.50	22.75 ± 0.75	14.94 ± 0.07	20.70 ± 0.30	10.05 ± 0.25	8.50 ± 0.30	4.00 ± 2.00
M16	65.00 ± 0.50	29.35 ± 0.75	19.80 ± 0.20	28.10 ± 0.30	13.85 ± 0.25	11.70 ± 0.30	3.50 ± 2.00


Diameter inside $d_i$ [mm]	Length $L$ [mm]	Length of spread $L_s$ [mm]	Diameter outside $d_o$ [mm]	Length of cone $L_c$ [mm]	Diameter cone outside $d_{co}$ [mm]	Diameter cone inside $d_{ci}$ [mm]	square $s_c$ [°]
M8x25	24.90 ± 0.30	11.15 ± 0.60	10.00 - 0.13	8.15 ± 0.20	6.40 ± 0.05	5.40 ± 0.05	4.5 ± 0.5
M10x25	24.60 ± 0.40	11.60 ± 0.60	12.00 - 0.13	8.80 ± 0.20	8.30 ± 0.05	7.50 ± 0.05	3.5 ± 0.5
M10x30	29.60 ± 0.40	15.00 ± 0.60	12.00 - 0.13	13.60 ± 0.20	7.85 ± 0.05	6.70 ± 0.05	3.5 ± 0.5
M12x25	24.60 ± 0.40	11.20 ± 0.60	15.00 - 0.13	10.45 ± 0.20	9.80 ± 0.05	8.60 ± 0.05	7.0 ± 0.5

**Table A2. Materials**

Member	Material
Sleeve	Coldformed steel grade C8C in accordance with table 2 in EN 10263-2 or coldformed steel grade 1008 in accordance with table 3 in ASTM A510. Galvanized
Plug	Coldformed steel grade C8C in accordance with table 2 in EN 10263-2 or coldformed steel grade 1008 in accordance with table 3 in ASTM A510. Galvanized

**MEA DROP-IN ANCHOR**Product description  
Materials**Annex A2**  
of European  
Technical Assessment  
ETA-18/0269

**Figure A2 - Hand setting tool**

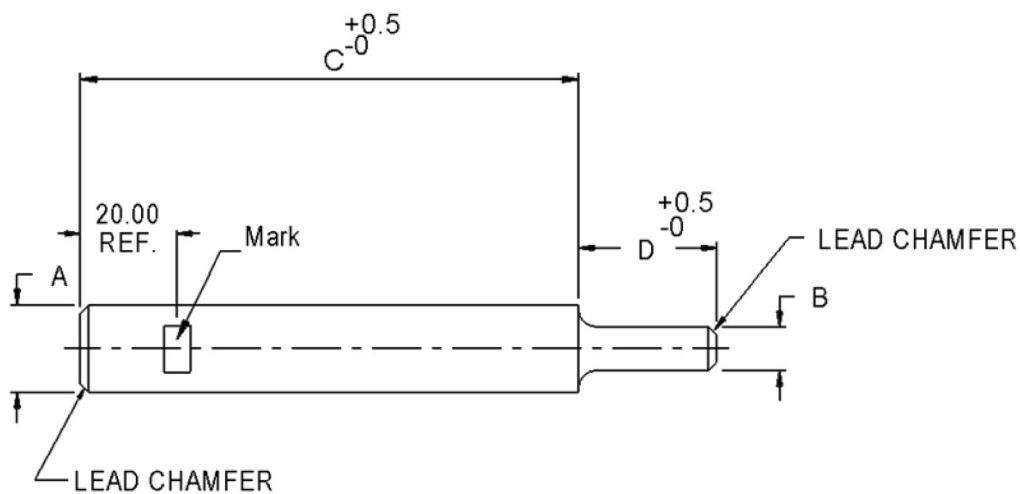

**Table A3 – Dimensions of hand setting tool**

Size	A [mm]	B (REF) [mm]	C [mm]	D [mm]
M6	Ø 10.0	Ø 4.7	114.5	15.0
M8	Ø 10.0	Ø 6.35	94.5	17.9
M10	Ø 13.0	Ø 7.9	100.5	23.8
M12	Ø 16.0	Ø 9.8	107.5	29.7
M16	Ø 22.0	Ø 13.5	114.5	36.8


Size	A [mm]	B (REF) [mm]	C [mm]	D [mm]
M8x25	Ø 10.0	Ø 6.35	95.65	16.75
M10x25	Ø 13.0	Ø 7.9	108.5	15.8
M10x30	Ø 13.0	Ø 7.9	108.3	16.0
M12x25	Ø 16.0	Ø 9.8	123.05	14.15

**MEA DROP-IN ANCHOR**

Product description  
Setting tools

**Annex A3**  
of European  
Technical Assessment  
ETA-18/0269

**Figure A3 - Mechanical setting tool**

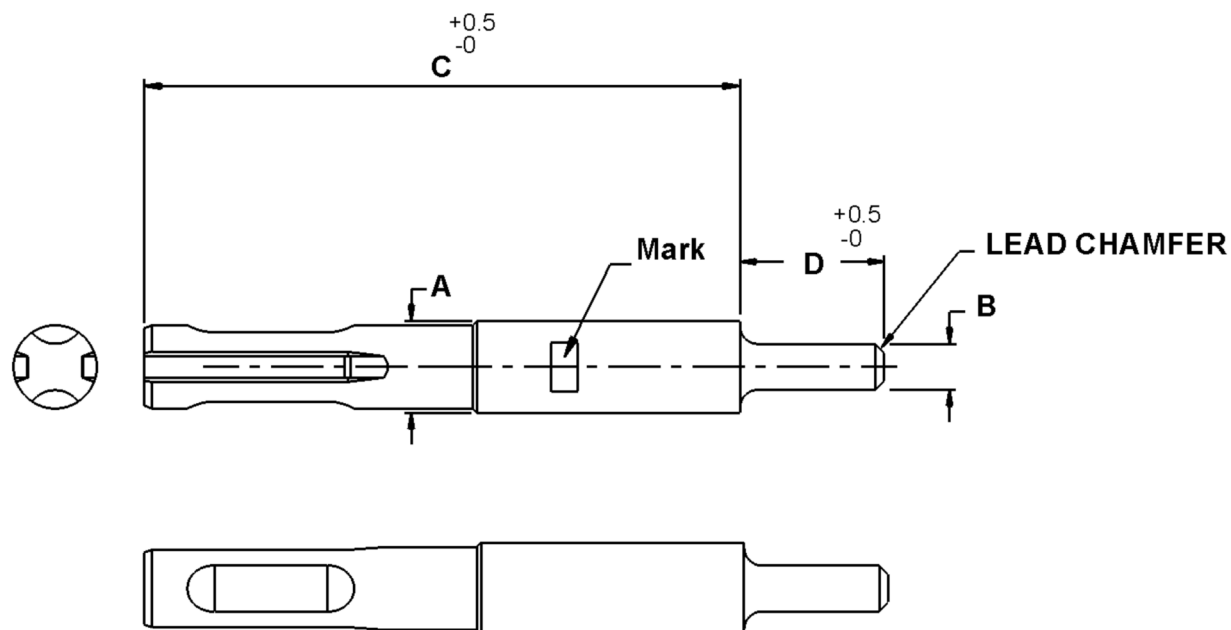

**Table A4 – Dimensions of mechanical setting tool**

Size	A [mm]	B (REF) [mm]	C [mm]	D [mm]
M6	Ø 10.0	Ø 4.7	114.5	15.0
M8	Ø 10.0	Ø 6.35	94.5	17.9
M10	Ø 13.0	Ø 7.9	100.5	23.8
M12	Ø 16.0	Ø 9.8	107.5	29.7
M16	Ø 22.0	Ø 13.5	114.5	36.8

Size	A [mm]	B (REF) [mm]	C [mm]	D [mm]
M8x25	Ø 10.0	Ø 6.35	95.65	16.75
M10x25	Ø 13.0	Ø 7.9	108.5	15.8
M10x30	Ø 13.0	Ø 7.9	108.3	16.0
M12x25	Ø 16.0	Ø 9.8	123.05	14.15

**MEA DROP-IN ANCHOR**

Product description  
Setting tools

**Annex A4**  
of European  
Technical Assessment  
ETA-18/0269

**Use:**

The anchors are intended to be used for anchorages for which requirements for mechanical resistance and stability and safety in use in the sense of the Basic Requirements 1 and 4 of Regulation 305/2011 (EU) shall be fulfilled and failure of anchorages made with these products would compromise the stability of the works, cause risk to human life and/or lead to considerable economic consequences.

**Anchors subject to:**

- Multiple use for non-structural applications.
- Static and quasi-static loads.

**Base materials:**

- Reinforced or unreinforced normal weight concrete of strength class C20/25 at minimum to C50/60 at maximum according to EN 206-1.
- Cracked and non-cracked concrete

**Use conditions (Environmental conditions):**

- Internal dry conditions

**Installation:**

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Anchor installation in accordance with the manufacturer's specifications and drawings and using the appropriate tools.
- Check before placing the anchor to ensure that the strength class of the concrete, in which the anchor is to be placed, is identical with the values which the characteristic loads apply.
- Check of concrete being well compacted, e.g. without significant voids.
- Edge distances and spacings not less than the specified values without minus tolerances.
- Positioning of the drill holes without damaging the reinforcement.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of load application.
- Hole shall be clear.
- Anchor installation such that the effective anchorage depth is complied with; the compliance is ensured if the thickness of the fixture is not larger than the maximum values given in Annex B2.
- Anchor expansion by impact on the wedge of the anchor; the anchor is properly set if the wedge is fully dropped in.

**Proposed design methods:**

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be transmitted. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static and quasi-static loads are designed in accordance with EN 1992-4.
- Fasteners are only to be used for multiple use for non-structural applications acc. to ETAG 001, Part 6, Edition August 2010.

<b>MEA DROP-IN ANCHOR</b>	<b>Annex B1</b> of European Technical Assessment ETA-18/0269
Intended use – Specification	

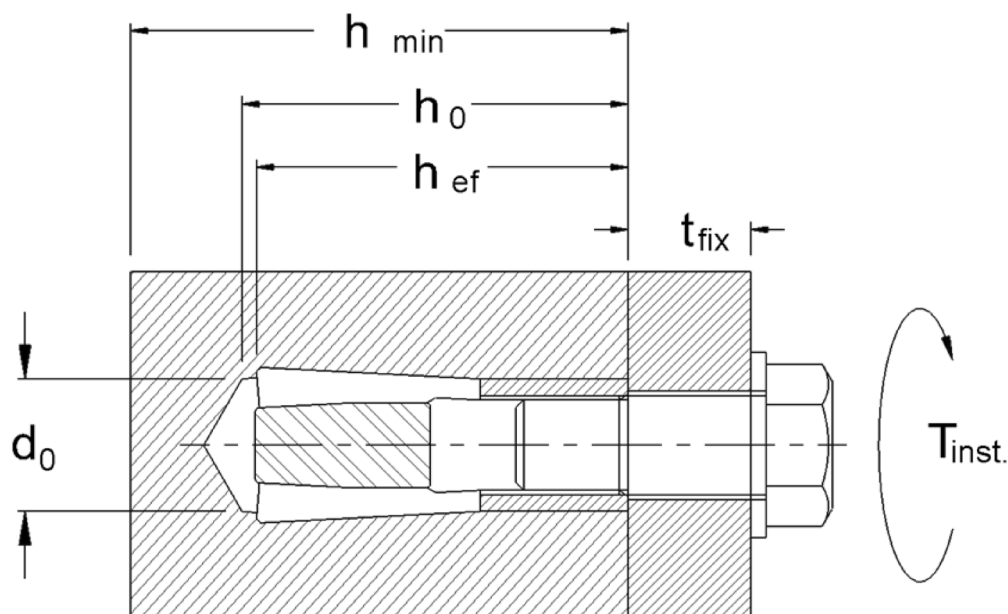


Table B1. Installation parameters

Installation parameters		M6	M8	M10	M12	M16
Nom. drill hole diameter	$\varnothing d_0$ [mm] =	8	10	12	15	20
Max. Cutting diameter of drill bit	$\varnothing d_{cut}$ [mm] $\leq$	8,45	10,45	12,45	15,50	20,50
Depth of drill hole	$h_1$ [mm] $\geq$	25	30	40	50	65
Effective anchorage depth	$h_{ef}$ [mm] $\geq$	25	30	40	50	65
Installation moment	$T_{inst}$ [Nm] =	4	8	15	35	60

Installation parameters		M8x25	M10x25	M10x30	M12x25
Nom. drill hole diameter	$\varnothing d_0$ [mm] =	10	12	12	15
Max. Cutting diameter of drill bit	$\varnothing d_{cut}$ [mm] $\leq$	10,45	12,45	12,45	15,50
Depth of drill hole	$h_1$ [mm] $\geq$	25	25	30	25
Effective anchorage depth	$h_{ef}$ [mm] $\geq$	25	25	30	25
Installation moment	$T_{inst}$ [Nm] $\leq$	8	15	15	35

		M6	M8	M10	M12	M16
Minimum thickness of member	$h_{min}$ [mm] =	100	100	120	140	160
Minimum edge distance	$c_{min}$ [mm] =	110	140	90	140	125
Minimum spacing	$s_{min}$ [mm] =	120	130	120	130	140

		M8x25	M10x25	M10x30	M12x25
Minimum thickness of member	$h_{min}$ [mm] =	100	100	100	100
Minimum edge distance	$c_{min}$ [mm] =	50	55	60	100
Minimum spacing	$s_{min}$ [mm] =	100	110	150	200

**MEA DROP-IN ANCHOR**

Intended use – installation parameters

**Annex B2**of European  
Technical Assessment  
ETA-18/0269

**Table C1: Design method C, characteristic tension load values**

			M6	M8	M10	M12	M16
<i>Steel failure</i>							
Resistance to steel failure	$N_{Rk,s}$	[kN]	9,92	14,62	15,24	30,92	49,90
Partial safety factor under tension load	$\gamma_{Ms}$	[-]	1,40	1,40	1,40	1,40	1,40
<i>Pull-out failure</i>							
Resistance to pull-out failure in cracked concrete C20/25	$N_{Rk,cr}$	[kN]	2,0	2,0	4,0	3,5	6,0
Increase factors for non-cracked concrete	$\Psi_c$	[-]	1,35	1,25	1,47	1,55	1,55
<i>Concrete cone failure</i>							
Effective embedment depth	$h_{ef}$	[mm]	25	30	40	50	65
Edge distance	$c_{cr,N}$	[mm]	$1,5xh_{ef}$	$1,5xh_{ef}$	$1,5xh_{ef}$	$1,5xh_{ef}$	$1,5xh_{ef}$
Spacing	$s_{cr,N}$	[mm]	$3xh_{ef}$	$3xh_{ef}$	$3xh_{ef}$	$3xh_{ef}$	$3xh_{ef}$
<i>Robustness</i>							
Installation safety factor	$\gamma_{inst}$	[-]	1,2	1,2	1,2	1,4	1,0
<i>Minimum edge distance and spacing</i>							
Minimum edge distance	$c_{min}$	[mm]	110	140	90	140	125
Minimum spacing distance	$s_{min}$	[mm]	120	130	120	130	140
Min. thickness of the concrete member	$h_{min}$	[mm]	100	100	120	140	160
<i>Edge distance to prevent splitting under load</i>							
	$N_{Rk,sp}^0$	[kN]	2,0	2,0	4,0	3,5	6,0
Appropriate edge distance	$c_{cr,sp}$	[mm]	110	140	90	140	125
<i>Displacements under static and quasi-static loading</i>							
Short time tension displacement	$\delta_{N0}$	[mm]	0,10	0,35	0,09	0,08	0,32
Long-time tension displacement	$\delta_{N\infty}$	[mm]	-	-	0,09	-	-

**MEA DROP-IN ANCHOR**

Performance for static and quasi-static loads: Resistances

**Annex C1**  
of European  
Technical Assessment  
ETA-18/0269



**Table C1A: Design method C, characteristic tension load values**

			M8x25	M10x25	M10x30	M12x25
<i>Steel failure</i>						
Resistance to steel failure	$N_{Rk,s}$	[kN]	14,13	15,24	15,24	30,92
Partial safety factor under tension load	$\gamma_{Ms}$	[-]	1,40	1,40	1,40	1,40
<i>Pull-out failure</i>						
Resistance to pull-out failure in cracked concrete C20/25	$N_{Rk,cr}$	[kN]	0.9	1.5	3.0	2.0
Increase factors for non-cracked concrete	$\Psi_c$	[-]	1.34	1.45	1.19	1.45
<i>Concrete cone failure</i>						
Effective embedment depth	$h_{ef}$	[mm]	25	25	30	25
Edge distance	$c_{cr,N}$	[mm]	1,5x $h_{ef}$	1,5x $h_{ef}$	1,5x $h_{ef}$	1,5x $h_{ef}$
Spacing	$s_{cr,N}$	[mm]	3x $h_{ef}$	3x $h_{ef}$	3x $h_{ef}$	3x $h_{ef}$
<i>Robustness</i>						
Installation safety factor	$\gamma_{inst}$	[-]	1.4	1.2	1.4	1.4
<i>Minimum edge distance and spacing</i>						
Minimum edge distance	$c_{min}$	[mm]	50	55	60	100
Minimum spacing distance	$s_{min}$	[mm]	100	110	150	200
Min. thickness of the concrete member	$h_{min}$	[mm]	100	100	100	100
<i>Edge distance to prevent splitting under load</i>						
	$N^0_{Rk,sp}$	[kN]	0.9	1.5	2.0	2.0
Appropriate edge distance	$c_{cr,sp}$	[mm]	60	75	90	100
<i>Displacements under static and quasi-static loading</i>						
Short time tension displacement	$\delta_{N0}$	[mm]	0.10	0.14	0.28	0.31
Long-time tension displacement	$\delta_{N\infty}$	[mm]	-	-	0.40	-

**MEA DROP-IN ANCHOR**

Performance for static and quasi-static loads: Resistances

**Annex C2**  
of European  
Technical Assessment  
ETA-18/0269

**Table C2: Design method C, Characteristic shear load values**

			M6	M8	M10	M12	M16
<i>Resistance to steel failure under shear load</i>							
Resistance to shear load without lever arm	$V_{Rk,s}^0$	[kN]	2,5	5,0	6,0	7,5	16,0
Resistance to shear load with lever arm	$M_{Rk,s}^0$	[Nm]	18,5	33,4	46,5	114	245
<i>Displacements under static and quasi-static loading</i>							
Short time shear displacement	$\delta_{v0}$	[mm]	0,51	0,61	0,45	0,23	0,38
Long-time shear displacement	$\delta_{v\infty}$	[mm]	0,77	0,92	0,68	0,35	0,57

			M8x25	M10x25	M10x30	M12x25
<i>Resistance to steel failure under shear load</i>						
Resistance to shear load without lever arm	$V_{Rk,s}^0$	[kN]	4.0	7,0	6.5	5.0
Resistance to shear load with lever arm	$M_{Rk,s}^0$	[Nm]	34.7	46.5	46.5	114.0
<i>Displacements under static and quasi-static loading</i>						
Short time shear displacement	$\delta_{v0}$	[mm]	0.33	0.76	1.37	0.05
Long-time shear displacement	$\delta_{v\infty}$	[mm]	0.50	1.14	2.06	0.08

**MEA DROP-IN ANCHOR**

Performance for static and quasi-static loads: Resistances and Displacements

**Annex C3**  
of European  
Technical Assessment  
ETA-18/0269

Table C3: Resistance to fire

Characteristic values for tension load under fire exposure in accordance to EOTA TR020												
Steel failure	M6x25	M8x30	M8x40	M10x25	M10x30	M10x40	M12x50	M16x65				
Characteristic resistance	R30 R60 R90 R120	0,21 0,19 0,15 0,11	0,27 0,25 0,19 0,14	0,27 0,25 0,19 0,14	0,50 0,43 0,33 0,27	0,50 0,43 0,33 0,27	0,50 0,43 0,33 0,27	1,24 0,93 0,81 0,62	2,14 1,60 1,39 1,07			
$N_{Rk,s,fi}$ [kN]												
Pullout failure												
Characteristic resistance in concrete $\geq$ C20/25	R30 R60 R90 R120	1,25 1,00	0,88 0,70	1,50 1,20	0,38 0,30	1,38 1,10	1,75 1,40	2,50 2,00	3,00 2,40			
$N_{Rk,p,fi}$ [kN]												
Concrete cone failure												
Characteristic resistance in concrete $\geq$ C20/25	R30 R60 R90 R120	0,56 0,45	0,89 0,71	1,82 1,46	0,56 0,45	0,89 0,71	1,82 1,46	3,18 2,55	6,13 4,91			
$N^{\circ}_{Rk,c,fi}$ [kN]												
Spacing												
$S_{cr,fi}$ [mm]		100	90	120	110	150	160	200	260			
$S_{min}$ [mm]												
Edge distance												
$C_{cr,fi}$ [mm]												
$C_{min}$ [mm]												
Characteristic values for shear load under fire exposure in accordance to EOTA TR020												
Steel failure without lever arm	M6x25	M8x30	M8x40	M10x25	M10x30	M10x40	M12x50	M16x65				
Characteristic resistance	R30 R60 R90 R120	0,21 0,19 0,15 0,11	0,27 0,25 0,19 0,14	0,27 0,25 0,19 0,14	0,50 0,43 0,33 0,27	0,50 0,43 0,33 0,27	0,50 0,43 0,33 0,27	1,24 0,93 0,81 0,62	2,14 1,60 1,39 1,07			
$V_{Rk,s,fi}$ [kN]												
Steel failure with lever arm												
Characteristic resistance	R30 R60 R90 R120	0,40 0,36 0,28 0,20	0,67 0,60 0,47 0,34	0,67 0,60 0,47 0,34	1,53 1,32 1,02 0,81	1,53 1,32 1,02 0,81	1,53 1,32 1,02 0,81	4,59 3,44 2,98 2,29	10,49 7,87 6,82 5,25			
$M^{\circ}_{Rk,s,fi}$ [Nm]												
Pryout failure												
k-factor	R30 R60 R90 R120	1,00	1,00	1,00	1,00	1,00	1,00	1,00	2,00			
$k=K_3$ [-]												
Characteristic resistance in concrete $\geq$ C20/25	R30 R60 R90 R120	0,56	0,89	1,82	0,56	0,89	1,82	3,18	12,26			
$V^{\circ}_{Rk,cp,fi}$ [kN]												
Concrete edge failure												
The initial value $V^{\circ}_{Rk,c,fi}$ of the characteristic resistance in concrete C20/25 to C50/60 under fire exposure may be determined by: $V^{\circ}_{Rk,c,fi} = 0,25 \times V^{\circ}_{Rk,c} (\leq R90)$ $V^{\circ}_{Rk,c,fi} = 0,20 \times V^{\circ}_{Rk,c} (\leq R120)$												
$V^{\circ}_{Rk,c,fi}$ [kN]		0,45	0,71	1,46	0,45	0,71	1,46	2,55	9,81			

MEA DROP-IN ANCHOR

Performance for exposure to fire

Annex C4  
of European  
Technical Assessment  
ETA-18/0269

**Table C4: Reaction to fire**

<b>HARMONIZED TECHNICAL SPECIFICATION: ETAG 001 PART 1 PARAGRAPH 5.2.1</b>	
<b>ESSENTIAL CHARACTERISTICS</b>	<b>PERFORMANCE</b>
<b>Reaction to fire</b>	In the final application, the thickness of the mortar layer is about 1 to 2 mm and most of the mortar is material classified class A1 according to EC Decision 96/603/EC. Therefore, it may be assumed that the bonding material (synthetic mortar or a mixture of synthetic mortar and cementitious mortar) in connection with the metal anchor in the end use application do not contribute to fire growth or to the fully developed fire and they have no influence to the smoke hazard.
<b>MEA DROP-IN ANCHOR</b>	
Performance for exposure to fire	<b>Annex C5</b> of European Technical Assessment ETA-18/0269