

Declaration of Performance

1343-CPR-M 530-10

1. Unique identification code of the product-type: Mungo Injection System MIT-Hybrid Plus for rebar connection

2. Manufacturer: Mungo Befestigungstechnik AG, Bornfeldstrasse 2, CH-4600 Olten/Switzerland

3. System/s of AVCP: System 1

4. Intended use or use/es:

Product	Intended use
Injection system for post-installed rebar connection	Post-installed connection of reinforcing bars (rebar) by anchoring or overlap connection joint in normal weight concrete.

5. European Assessment Document: EAD 330087-00-0601 "Systems for post-installed rebar connections with mortar"

European Technical Assessment: ETA-17/0130 of 7 June 2019

Technical Assessment Body: DIBt – Deutsches Institut für Bautechnik

Notified body/ies: 1343 – MPA Darmstadt

6. Declared performance:

Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under static and quasi-static loading	See appendix, especially Annex C1

Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Rebar connections satisfy requirements for Class A1
Resistance to fire	See Annex C2 and C3

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Robert Klemencic Dipl.-Ing.
Head of Engineering



Olten, 2019-11-13



This DoP Has been prepared in different languages. In case there is a dispute on the interpretation the English version shall always prevail.

The Appendix includes voluntary and complementary information in English language exceeding the (language as neutrally specified) legal requirements.

Installation post installed rebar

Figure A1: Overlapping joint for rebar connections of slabs and beams

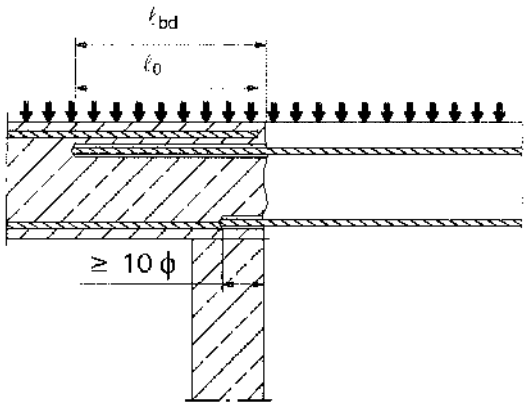


Figure A3: End anchoring of slabs or beams

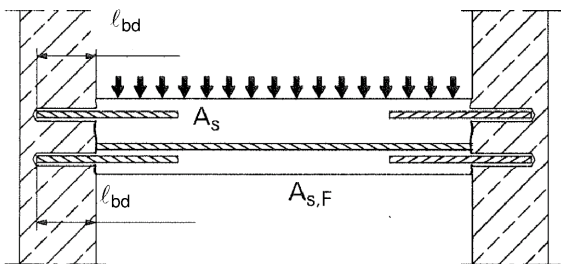


Figure A5: Anchoring of reinforcement to cover the line of acting tensile force

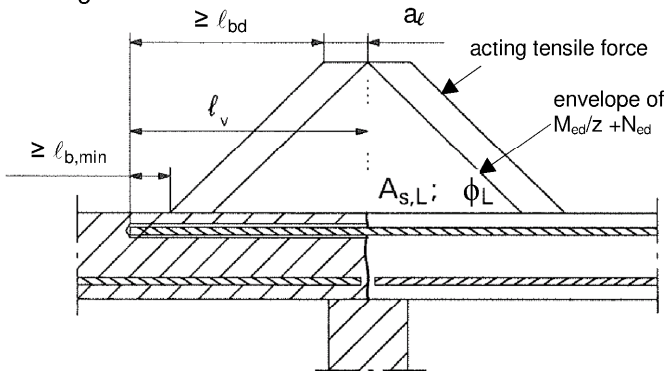


Figure A2: Overlapping joint at a foundation of a wall or column where the rebars are stressed in tension


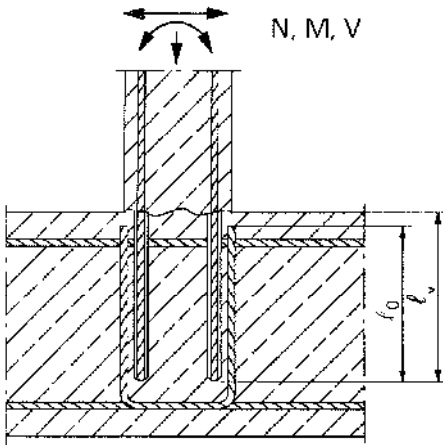


Figure A4: Rebar connection for components stressed primarily in compression. The rebars are stressed in compression

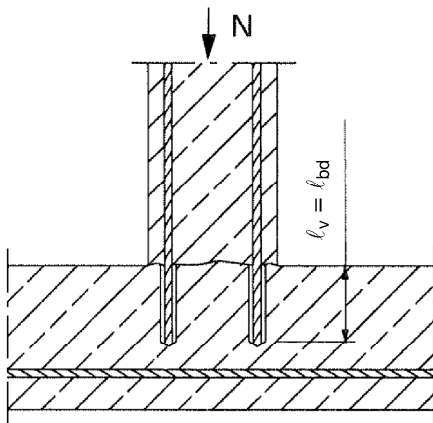

Note to Figure A1 to A5:

In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2004+AC:2010.

Preparing of joints according to Annex B 2

Mungo Injection system MIT-Hybrid Plus for rebar connection

Product description
Installed condition and examples of use for rebars

Annex A 1

Installation tension anchor ZA

Figure A6: Overlapping joint of a column stressed in bending to a foundation

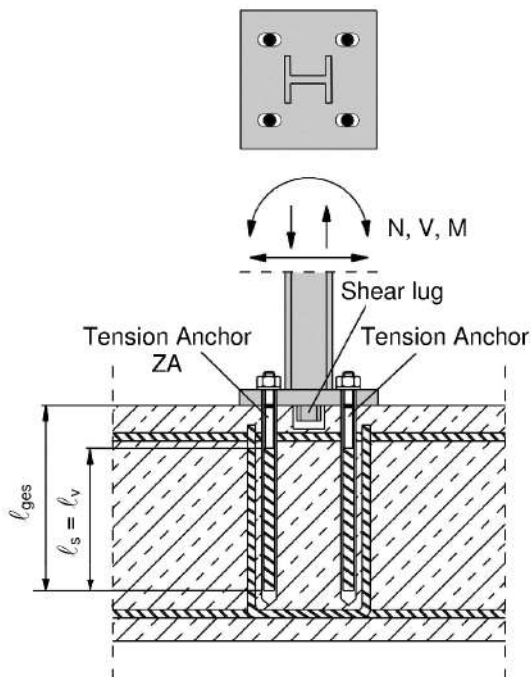


Figure A7: Overlap joint for the anchorage of barrier posts


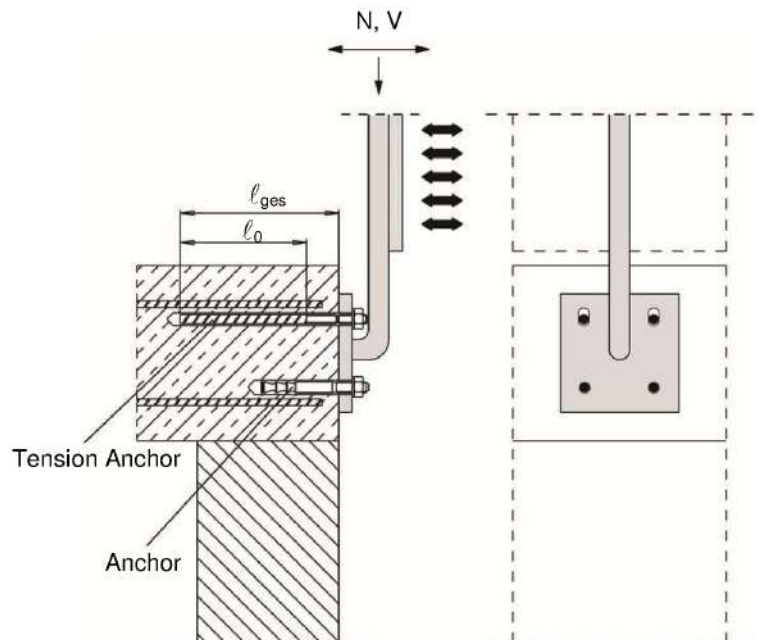


Figure A8: Overlap joint for the anchorage to cantilever members

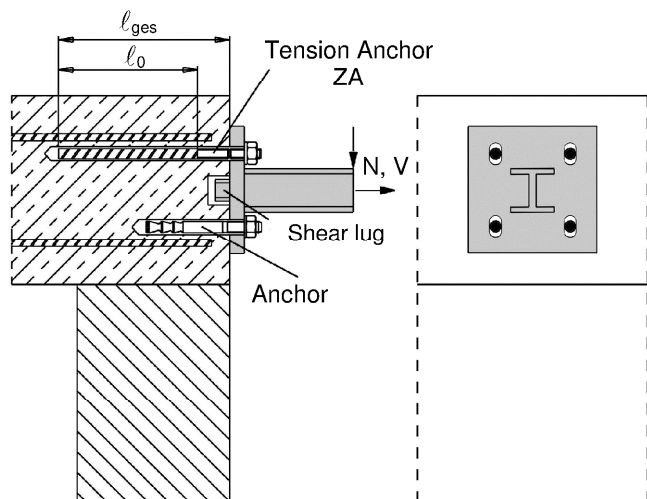

Note to Figure A6 to A8:

In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2002+AC:2010

Mungo Injection system MIT-Hybrid Plus for rebar connection

Product description

Installed condition and examples of use for tension anchors ZA

Annex A 2

Mungo Injection system MIT-Hybrid Plus:

Injection mortar: MIT-Hybrid, MIT-Hybrid Plus


Typ "coaxial": 150 ml, 280 ml,
300 ml up to 333 ml and
380 ml up to 420 ml cartridge

Type "side-by-side":

235 ml, 345 ml and 825 ml
cartridge




Imprint: MIT-Hybrid, MIT-Hybrid Plus,
processing notes, charge-code, shelf life,
hazard-code, curing- and processing time
(depending on the temperature), optional with
travel scale




Imprint: MIT-Hybrid, MIT-Hybrid Plus,
processing notes, charge-code, shelf life,
hazard-code, curing- and processing time
(depending on the temperature), optional with
travel scale


Static Mixer

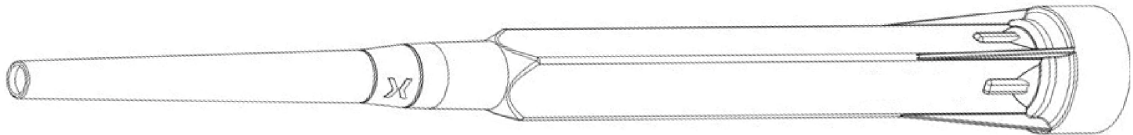


Piston plug and mixer extension

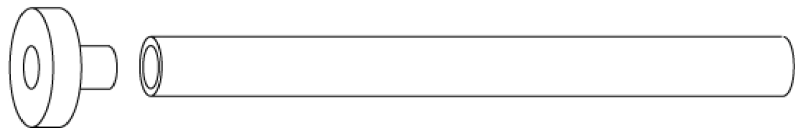

Reinforcing bar (rebar): $\varnothing 8$ to $\varnothing 32$



Tension Anchor ZA: M12 to M24

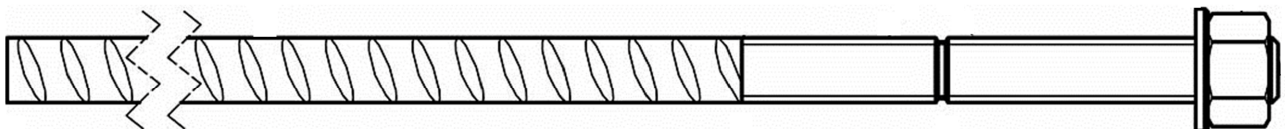


Mungo Injection system MIT-Hybrid Plus for rebar connection

Product description

Injection mortar / Static mixer / Rebar / Tension Anchor ZA

Annex A 3

Reinforcing bar (rebar): $\varnothing 8$, $\varnothing 10$, $\varnothing 12$, $\varnothing 14$, $\varnothing 16$, $\varnothing 20$, $\varnothing 22$, $\varnothing 24$, $\varnothing 25$, $\varnothing 28$, $\varnothing 32$





- Minimum value of related rib area $f_{R,min}$ according to EN 1992-1-1:2004+AC:2010
- Rib height of the bar shall be in the range $0,05\phi \leq h \leq 0,07\phi$
(ϕ : Nominal diameter of the bar; h: Rib height of the bar)

Table A1: Materials

Designation	Material
Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$
Mungo Injection system MIT-Hybrid Plus for rebar connection	Annex A 4
Product description Specifications Rebar	

Tension Anchor ZA: M12, M16, M20, M24

Marking: e.g.  12 A4

-  Mark of the producer
ZA Trade name
12 Rod diameter/thread
A4 for stainless steel A4
HCR for high corrosion resistance steel

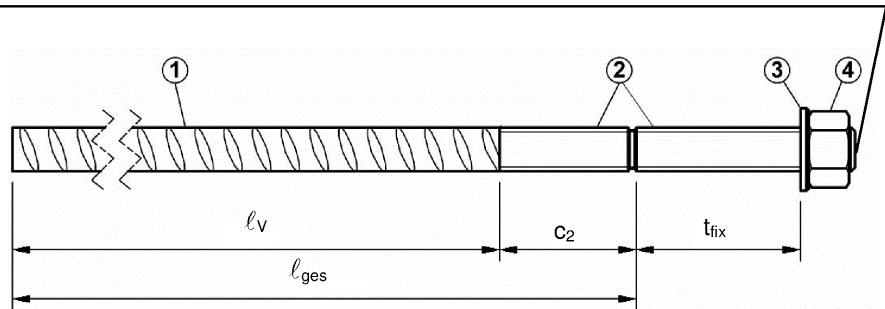


Table A2: Materials

Part	Designation	Material											
		ZA vz				ZA A4				ZA HCR			
		M12	M16	M20	M24	M12	M16	M20	M24	M12	M16	M20	M24
1	Reinforcement bar	Class B according to NDP or NCL of EN 1992-1-1/NA $f_{yk} = f_{tk} = k \cdot f_{yk}$											
2	Threaded rod	Steel, zinc plated according to EN 10087:1998 or EN 10263:2001				Stainless steel, 1.4362, 1.4401, 1.4404, 1.4571, EN 10088-1:2014				High corrosion resistant steel, 1.4529, 1.4565, EN 10088-1:2014			
	f_{yk} [N/mm ²]	640				640				640			
3	Washer	Steel, zinc plated according to EN 10087:1998 or EN 10263:2001				Stainless steel, 1.4362, 1.4401, 1.4404, 1.4571, EN 10088-1:2014				High corrosion resistant steel, 1.4529, 1.4565, EN 10088-1:2014			
4	Nut												

Table A3: Dimensions and installation parameter

Size			ZA-M12	ZA-M16	ZA-M20	ZA-M24
Diameter of threaded rod		[mm]	12	16	20	24
Diameter of reinforcement bar		[mm]	12	16	20	25
Drill hole diameter		[mm]	16	20	25	32
Diameter of clearance hole in fixture		[mm]	14	18	22	26
With across nut flats	SW	[mm]	19	24	30	36
Stress area	A _s	[mm ²]	84	157	245	353
Effective embedment depth	l _v	[mm]	according to static calculation			
Length of bonded thread	plated	c ₂	[mm]	≥ 20	≥ 20	≥ 20
	A4/HCR			≥ 100	≥ 100	≥ 100
Minimum thickness of fixture	t _{fix}	[mm]	5	5	5	5
Maximum thickness of fixture	t _{fix}	[mm]	3000	3000	3000	3000
Maximum installation torque	T _{max}	[Nm]	50	100	150	150

Mungo Injection system MIT-Hybrid Plus for rebar connection

Product description
Specifications Tension Anchor ZA

Annex A 5

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads.
- Fire exposure

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C12/15 to C50/60 according to EN 206-1:2000.
- Maximum chloride concrete of 0,40% (CL 0.40) related to the cement content according to EN 206-1:2000.
- Non-carbonated concrete.

Note: In case of a carbonated surface of the existing concrete structure the carbonated layer shall be removed in the area of the post-installed rebar connection with a diameter of $\phi + 60$ mm prior to the installation of the new rebar.

The depth of concrete to be removed shall correspond to at least the minimum concrete cover in accordance with EN 1992-1-1:2004+AC:2010.

The foregoing may be neglected if building components are new and not carbonated and if building components are in dry conditions.

Temperature Range:

- - 40°C to +80°C (max. short term temperature +80°C and max long term temperature +50°C).

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions or subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the forces to be transmitted.
- Design according to EN 1992-1-1:2004+AC:2010, EN 1992-1-2:2004+AC:2008 and Annex B 2 and B 3.
- The actual position of the reinforcement in the existing structure shall be determined on the basis of the construction documentation and taken into account when designing.

Installation:

- Dry or wet concrete.
- It must not be installed in flooded holes.
- Overhead installation allowed.
- Hole drilling by hammer drill (HD) hollow drill (HDB) or compressed air drill mode (CD).
- The installation of post-installed rebar resp. tension anchors shall be done only by suitable trained installer and under supervision on site; the conditions under which an installer may be considered as suitable trained and the conditions for supervision on site are up to the Member States in which the installation is done.
- Check the position of the existing rebars (if the position of existing rebars is not known, it shall be determined using a rebar detector suitable for this purpose as well as on the basis of the construction documentation and then marked on the building component for the overlap joint).


Mungo Injection system MIT-Hybrid Plus for rebar connection

**Intended use
Specifications**

Annex B 1

Figure B1: General construction rules for post-installed rebars

- Only tension forces in the axis of the rebar may be transmitted
- The transfer of shear forces between new concrete and existing structure shall be designed additionally according to EN 1992-1-1:2004+AC:2010.
- The joints for concreting must be roughened to at least such an extent that aggregate protrude.

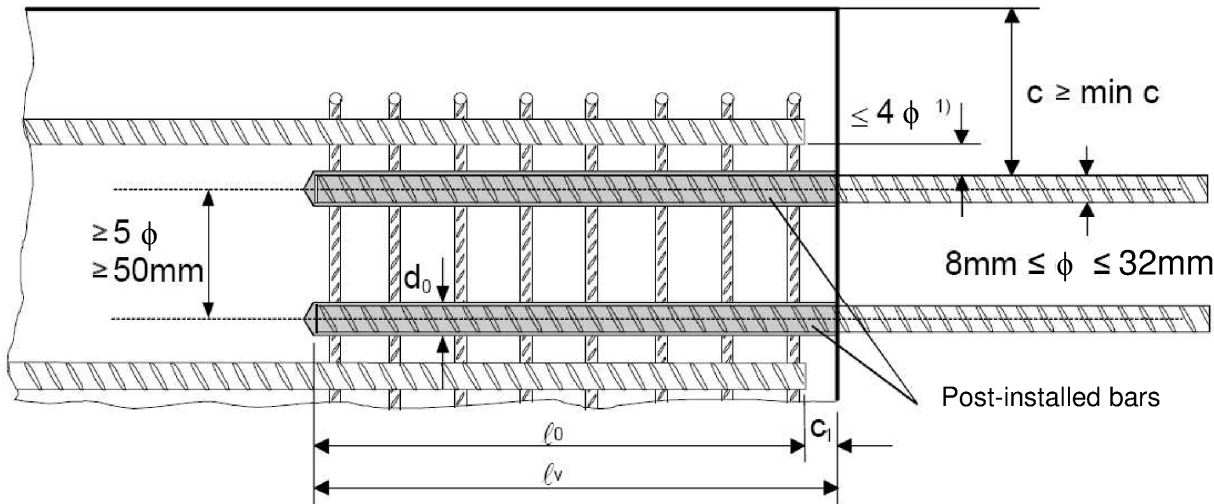

¹⁾ If the clear distance between lapped bars exceeds 4ϕ , then the lap length shall be increased by the difference between the clear bar distance and 4ϕ .

The following applies to Figure B1:

c	concrete cover of post-installed rebar
c_1	concrete cover at end-face of existing rebar
$\min c$	minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
ϕ	diameter of post-installed rebar
ℓ_0	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
ℓ_v	effective embedment depth, $\geq \ell_0 + c_1$
d_0	nominal drill bit diameter, see Annex B 6


Mungo Injection system MIT-Hybrid Plus for rebar connection

Intended use
General construction rules for post-installed rebars

Annex B 2

Figure B2: General construction rules for tension anchors ZA

- The length of the bonded-in thread may not be accounted as anchorage
- Only tension forces in the direction of the bar axis may be transmitted by the tension anchor ZA
- The tension force must be transferred via an overlap joint to the reinforcement in the building part.
- The transfer of shear forces shall be ensured by appropriate additional measures, e.g. shear lugs or by anchors with an European technical assessment.
- In the anchor plate, the holes for the tension anchors shall be executed as elongated holes with axis in the direction of the shear force.

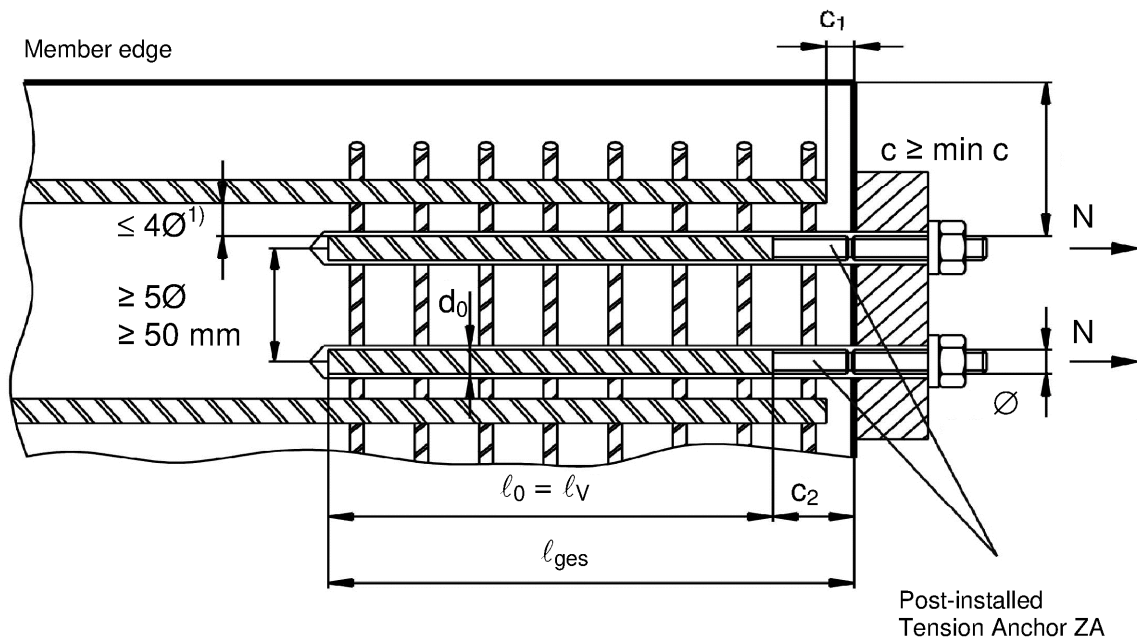

- ¹⁾ If the clear distance between lapped bars exceeds 4ϕ , then the lap length shall be increased by the difference between the clear bar distance and 4ϕ .

The following applies to Figure B2:


c	concrete cover of tension anchor ZA
c_1	concrete cover at end-face of existing rebar
c_2	Length of bonded thread
$\min c$	minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
ϕ	diameter of tension anchor
ℓ_0	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
ℓ_v	effective embedment depth, $\geq \ell_0 + c_1$
ℓ_{ges}	overall embedment depth, $\geq \ell_0 + c_2$
d_0	nominal drill bit diameter, see Annex B 6

Mungo Injection system MIT-Hybrid Plus for rebar connection

Intended use
General construction rules for tension anchors

Annex B 3

Table B1: Minimum concrete cover min $c^{1)}$ of post-installed rebar and tension anchor ZA depending of drilling method

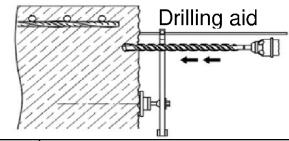

Drilling method	Rebar diameter	Without drilling aid	With drilling aid
Hammer drilling (HD) Hollow drill bit system (HDB)	< 25 mm	30 mm + $0,06 \cdot \ell_v \geq 2 \phi$	30 mm + $0,02 \cdot \ell_v \geq 2 \phi$
	≥ 25 mm	40 mm + $0,06 \cdot \ell_v \geq 2 \phi$	40 mm + $0,02 \cdot \ell_v \geq 2 \phi$
Compressed air drilling (CD)	< 25 mm	50 mm + $0,08 \cdot \ell_v$	50 mm + $0,02 \cdot \ell_v$
	≥ 25 mm	60 mm + $0,08 \cdot \ell_v$	60 mm + $0,02 \cdot \ell_v$

¹⁾ see Annex B2, Figures B1 and Annex B3, Figure B2
Comments: The minimum concrete cover acc. EN 1992-1-1:2004+AC:2010 must be observed

Table B2: maximum embedment depth $\ell_{v,max}$

Rebar	Tension anchor	$\ell_{v,max}$ [mm]
ϕ	ϕ	
8 mm		1000
10 mm		1000
12 mm	ZA-M12	$1000^{1)} / 1200$
14 mm		$1000^{1)} / 1400$
16 mm	ZA-M16	$1000^{1)} / 1600$
20 mm	ZA-M20	$1000^{1)} / 2000$
22 mm		$1000^{1)} / 2000$
24 mm		$1000^{1)} / 2000$
25 mm	ZA-M24	$1000^{1)} / 2000$
28 mm		$1000^{1)} / 2000$
32 mm		$1000^{1)} / 2000$

¹⁾ maximum embedment depth for use with hollow drill bit system (HDB)

Table B3: Base material temperature, gelling time and curing time

Concrete temperature	Gelling working time ¹⁾	Minimum curing time in dry concrete	Minimum curing time in wet concrete
- 5 °C to - 1 °C	50 min	5 h	10 h
0 °C to + 4 °C	25 min	3,5 h	7 h
+ 5 °C to + 9 °C	15 min	2 h	4 h
+ 10 °C to + 14 °C	10 min	1 h	2 h
+ 15 °C to + 19 °C	6 min	40 min	60 min
+ 20 °C to + 29 °C	3 min	30 min	60 min
+ 30 °C to + 40 °C	2 min	30 min	60 min
Cartridge temperature	+5°C to +40°C		

¹⁾ t_{gel} : maximum time from starting of mortar injection to completing of rebar setting.





Mungo Injection system MIT-Hybrid Plus for rebar connection

Intended use

Minimum concrete cover, maximum embedment depth, working time and curing times


Annex B 4

Table B4: Dispensing tools

Cartridge type/size	Hand tool		Pneumatic tool
Coaxial cartridges 150, 280, 300 up to 333 ml	 e.g. Type H 297 or H244C		 e.g. Type TS 492 X
Coaxial cartridges 380 up to 420 ml	 e.g. Type CCM 380/10	 e.g. Type H 285 or H244C	 e.g. Type TS 485 LX
Side-by-side cartridges 235, 345 ml	 e.g. Type CBM 330A	 e.g. Type H 260	 e.g. Type TS 477 LX
Side-by-side cartridge 825 ml	-	-	 e.g. Type TS 498X

All cartridges could also be extruded by a battery tool.


Cleaning and installation tools

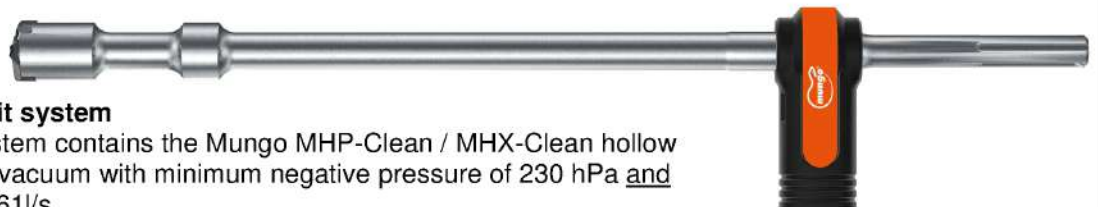

HDB – Hollow drill bit system

The hollow drill bit system contains the Mungo MHP-Clean / MHX-Clean hollow drill bit and a class M vacuum with minimum negative pressure of 230 hPa and flow rate of minimum 61l/s.

Brush MIT-BS:

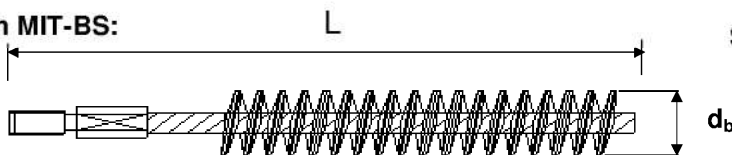

SDS Plus Adapter:



Brush extension:



Hand pump (volume 750 ml)



Rec. compressed air tool
hand slide valve (min 6 bar)

Mungo Injection system MIT-Hybrid Plus for rebar connection

Intended Use

Dispensing, cleaning and installation tools

Annex B 5

Table B5: Brushes, piston plugs, max anchorage depth and mixer extension, hammer (HD) and compressed air (CD) drilling

Bar size ϕ	Tension anchor ϕ	Drill bit - \emptyset		d_b Brush - \emptyset		$d_{b,min}$ min. Brush - \emptyset	Piston plug	Cartridge: All sizes				Cartridge: side-by-side (825 ml)	
		HD	CD					Hand or battery tool		Pneumatic tool		Pneumatic tool	
								$l_{v,max}$	Mixer extension	$l_{v,max}$	Mixer extension	$l_{v,max}$	Mixer extension
[mm]	[mm]	[mm]		MIT-	[mm]	[mm]	MIT-	[mm]		[mm]		[mm]	
8		12	-	BS12	13,5	12,5	-	700	VL10/0,75	800		800	VL10/0,75
10		14	-	BS14	15,5	14,5	VS14					1000	
12	ZA-M12	16		BS16	17,5	16,5	VS16			1000		1200	
14		18		BS18	20,0	18,5	VS18					1400	
16	ZA-M16	20		BS20	22,0	20,5	VS20					1600	
20	ZA-M20	25	-	BS25	27,0	25,5	VS25	700		VL10/0,75	2000	VL16/1,8	
		-	26	BS26	28,0	26,5	VS25						
22		28		BS28	30,0	28,5	VS28						
24		32		BS32	34,0	32,5	VS32						
25	ZA-M24	32		BS32	34,0	32,5	VS32						
28		35		BS35	37,0	35,5	VS35	500	500	2000			
32		40		BS40	43,5	40,5	VS40						

Table B6: Brushes, piston plugs, max anchorage depth and mixer extension, hammer drilling with hollow drill bit system (HDB)

Bar size ϕ	Tension anchor ϕ	Drill bit - \emptyset	d_b Brush - \emptyset	$d_{b,min}$ min. Brush - \emptyset	Piston plug	Cartridge: All sizes				Cartridge: side-by-side (825 ml)	
		HDB				Hand or battery tool		Pneumatic tool		Pneumatic tool	
						$l_{v,max}$	Mixer extension	$l_{v,max}$	Mixer extension	$l_{v,max}$	Mixer extension
[mm]	[mm]	[mm]	No cleaning required		MIT-	[mm]		[mm]		[mm]	
8		12			-	700	VL10/0,75	800	VL10/0,75	800	VL10/0,75
10		14			VS14 <td>1000</td>			1000			
12	ZA-M12	16			VS16 <td>1000</td>			1000			
14		18			VS18 <td>1000</td>			1000			
16	ZA-M16	20			VS20 <td>1000</td>			1000			
20	ZA-M20	25			VS25 <td rowspan="5">500</td> <td rowspan="5">VL10/0,75</td> <td rowspan="5">700</td> <td rowspan="5">VL10/0,75</td> <td rowspan="3">1000</td> <td rowspan="5">VL16/1,8</td>	500	VL10/0,75	700	VL10/0,75	1000	VL16/1,8
22		28			VS28						
24		32			VS32						
25	ZA-M24	32			VS32						
28		35			VS35						
32		40			VS40 <td></td> <td></td> <td></td> <td></td> <td>1000</td>					1000	

Mungo Injection system MIT-Hybrid Plus for rebar connection


Intended Use

Parameter brushes, piston plugs, max anchorage depth and mixer extension

Annex B 6

A) Bore hole drilling


Note: Before drilling, remove carbonated concrete and clean contact areas (see Annex B1)
In case of aborted drill hole: the drill hole shall be filled with mortar.




- 1a.** Hammer (HD) or compressed air drilling (CD)
Drill a hole into the base material to the size and embedment depth required by the selected reinforcing bar with carbide hammer drill (HD) or a compressed air drill (CD). Proceed with Step 2.



Hammer drill (HD + HDB)




- 1b.** Hollow drill bit system (HDB) (see Annex B 5)
Drill a hole into the base material to the size and embedment depth required by the selected reinforcing bar. This drilling system removes the dust and cleans the bore hole during drilling. Proceed with Step 3.

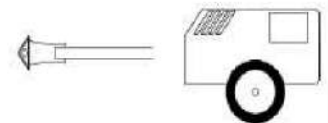


Compressed air drill (CD)

B) Bore hole cleaning


MAC: Cleaning for bore hole diameter $d_0 \leq 20\text{mm}$ and bore hole depth $h_0 \leq 10d_s$



- 2a.** Starting from the bottom or back of the bore hole, blow the hole clean a hand pump (Annex B 7) a minimum of four times.



- 2b.** Check brush diameter (Table B5). Brush the hole with an appropriate sized wire brush $> d_{b,min}$ (Table B5) a minimum of four times in a twisting motion.
If the bore hole ground is not reached with the brush, a brush extension shall be used.




- 2c.** Finally blow the hole clean again with a hand pump (Annex B 7) a minimum of four times.


CAC: Cleaning for all bore hole diameter and bore hole depth



- 2a.** Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) (Annex B 7) a minimum of two times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension shall be used.



- 2b.** Check brush diameter (Table B5). Brush the hole with an appropriate sized wire brush $> d_{b,min}$ (Table B5) a minimum of two times.
If the bore hole ground is not reached with the brush, a brush extension shall be used (Table B5).




- 2c.** Finally blow the hole clean again with compressed air (min. 6 bar) (Annex B 7) a minimum of two times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension shall be used.

Mungo Injection system MIT-Hybrid Plus for rebar connection


Intended Use
Installation instruction

Annex B 7


C) Preparation of bar and cartridge




3. Attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool.
For every working interruption longer than the recommended working time (Table B3) as well as for every new cartridges, a new static-mixer shall be used.



- 3a. In case of using the mixer extension VL16/1,8, the tip of the mixer nozzle has to be cut off at position „X“.




4. Prior to inserting the reinforcing bar into the filled bore hole, the position of the embedment depth shall be marked (e.g. with tape) on the reinforcing bar and insert bar in empty hole to verify hole and depth ℓ_v .
The reinforcing bar should be free of dirt, grease, oil or other foreign material.




5. Prior to dispensing into the anchor hole, squeeze out separately the mortar until it shows a consistent grey colour, but a minimum of three full strokes, and discard non-uniformly mixed adhesive components.

D) Filling the bore hole




6. Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. For embedment larger than 190 mm an extension nozzle shall be used.



For overhead and horizontal installation and bore holes deeper than 240 mm a piston plug and the appropriate mixer extension must be used.

Observe the gel-/ working times given in Table B3.

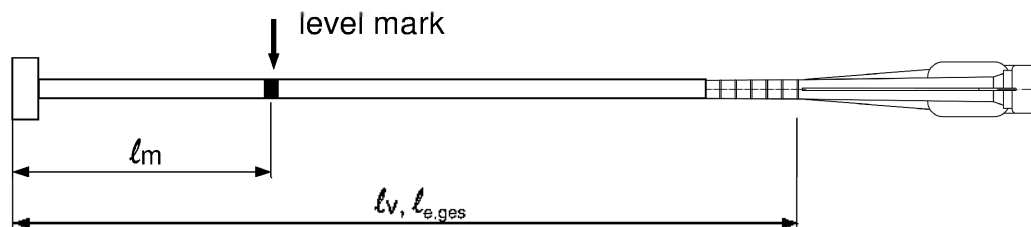

Injection tool must be marked by mortar level mark ℓ_m and anchorage depth ℓ_v resp. $\ell_{e,ges}$ with tape or marker.
Quick estimation: $\ell_m = 1/3 \cdot \ell_v$ Continue injection until the mortar level mark ℓ_m becomes visible.


$$\text{Optimum mortar volume: } \ell_m = \ell_v \text{ resp. } \ell_{e,ges} \cdot \left(1,2 \cdot \frac{\phi^2}{d_0^2} - 0,2 \right) \quad [\text{mm}]$$

Mungo Injection system MIT-Hybrid Plus for rebar connection

Intended Use
Installation instruction


Annex B 8

E) Inserting the rebar



7. Push the reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.

The bar should be free of dirt, grease, oil or other foreign material.



8. Be sure that the bar is inserted in the bore hole until the embedment mark is at the concrete surface and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed. For overhead installation fix embedded part (e.g. wedges).



9. Observe gelling time t_{gel} . Attend that the gelling time can vary according to the base material temperature (see Table B3). It is not allowed to move the bar after gelling time t_{gel} has elapsed. Allow the adhesive to cure to the specified time prior to applying any load. Do not move or load the bar until it is fully cured (attend Table B3). After full curing time t_{cure} has elapsed, the add-on part can be installed.

Mungo Injection system MIT-Hybrid Plus for rebar connection

Intended Use
Installation instruction

Annex B 9

Minimum anchorage length and minimum lap length

The minimum anchorage length $\ell_{b,min}$ and the minimum lap length $\ell_{0,min}$ according to EN 1992-1-1:2004+AC:2010 ($\ell_{b,min}$ acc. to Eq. 8.6 and Eq. 8.7 and $\ell_{0,min}$ acc. to Eq. 8.11) shall be multiply by the amplification factor α_{lb} according to Table C1.

Table C1: Amplification factor α_{lb} related to concrete class and drilling method

Concrete class	Drilling method	Bar size	Amplification factor α_{lb}
C12/15 to C50/60	All drilling method	8 mm to 32 mm ZA-M12 to ZA-M24	1,0

Table C2: Reduction factor k_b for all drilling methods

Rebar - Ø	Concrete class									
ϕ	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60	
8 to 32 mm ZA-M12 to ZA-M24	1,0									

Table C3: Design values of the ultimate bond stress $f_{bd,PIR}$ in N/mm² for all drilling methods and for good conditions

$$f_{bd,PIR} = k_b \cdot f_{bd}$$

with

f_{bd} : Design value of the ultimate bond stress in N/mm² considering the concrete classes and the rebar diameter according to EN 1992-1-1:2004+AC:2010.

(for all other bond conditions multiply the values by 0.7)

k_b : Reduction factor according to Table C2

Rebar - Ø	Concrete class									
ϕ	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60	
8 to 32 mm ZA-M12 to ZA-M24	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3	

Mungo Injection system MIT-Hybrid Plus for rebar connection

Performances

Amplification factor α_{lb}

Design values of ultimate bond resistance $f_{bd,PIR}$

Annex C 1

Design value of the ultimate bond stress $f_{bd,fi}$ under fire exposure for concrete classes C12/15 to C50/60, (all drilling methods):

The design value of the bond stress $f_{bd,fi}$ under fire exposure has to be calculated by the following equation:

$$f_{bd,fi} = k_{fi}(\theta) \cdot f_{bd,PIR} \cdot \gamma_c / \gamma_{M,fi}$$

with: $\theta \leq 364^\circ\text{C}$: $k_{fi}(\theta) = 30,34 \cdot e^{(\theta - 0,011)} / (f_{bd,PIR} \cdot 4,3) \leq 1,0$
 $\theta > 364^\circ\text{C}$: $k_{fi}(\theta) = 0$

$f_{bd,fi}$ Design value of the ultimate bond stress in case of fire in N/mm²

θ Temperature in °C in the mortar layer.

$k_{fi}(\theta)$ Reduction factor under fire exposure.


$f_{bd,PIR}$ Design value of the ultimate bond stress in N/mm² in cold condition according to Table C3 considering the concrete classes, the rebar diameter and the bond conditions according to EN 1992-1-1:2004+AC:2010.

γ_c partially safety factor according to EN 1992-1-1:2004+AC:2010

$\gamma_{M,fi}$ partially safety factor according to EN 1992-1-2:2004+AC:2008

For evidence under fire exposure the anchorage length shall be calculated according to EN 1992-1-1:2004+AC:2010 Equation 8.3 using the temperature-dependent ultimate bond stress $f_{bd,fi}$.

Example graph of Reduction factor $k_{fi}(\theta)$ for concrete classes C20/25 for good bond conditions:

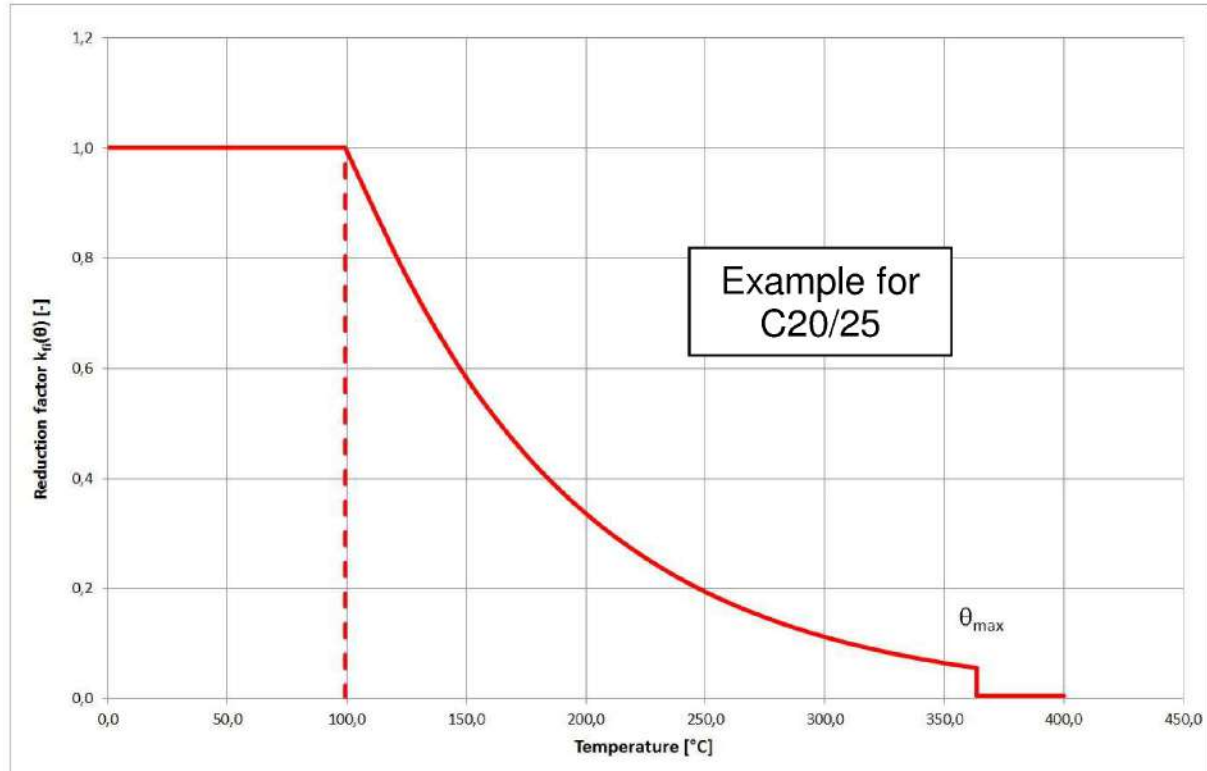

Mungo Injection system MIT-Hybrid Plus for rebar connection

Performances

Design value of bond strength $f_{bd,fi}$ under fire exposure

Annex C 2

Table C4: Characteristic tension strength for tension anchor ZA under fire exposure,

concrete classes C12/15 to C50/60, according to Technical Report TR 020

Tension Anchor			M12	M16	M20	M24
Steel, zinc plated (ZA vz)						
Characteristic steel strength	R30	$\sigma_{Rk,s,fi}$	[N/mm²]	20		
	R60			15		
	R90			13		
	R120			10		
Stainless Steel (ZA A4 or ZA HCR)						
Characteristic steel strength	R30	$\sigma_{Rk,s,fi}$	[N/mm²]	30		
	R60			25		
	R90			20		
	R120			16		

Design value of the steel strength $\sigma_{Rd,s,fi}$ under fire exposure

The design value of the steel strength $\sigma_{Rd,s,fi}$ under fire exposure has to be calculated by the following equation:

$$\sigma_{Rd,s,fi} = \sigma_{Rk,s,fi} / \gamma_{M,fi}$$

with:

$\sigma_{Rk,s,fi}$ characteristic steel strength according to Table C4
 $\gamma_{M,fi}$ partially safety factor according to EN 1992-1-2:2004+AC:2008

Mungo Injection system MIT-Hybrid Plus for rebar connection

Performances

Design value of the steel strength $\sigma_{Rd,s,fi}$ for tension anchor ZA under fire exposure

Annex C 3