



PRODUCT DATA

Grade 100 Connecting Link

Connecting links easily connect lifting components to chains and eyes.

Applications	
•	Use with Grade 100 lifting components
•	Connecting lifting components to chains and other fittings

Material	Grade 100
-----------------	-----------

Finish	Powder Coat
---------------	-------------



Features

- Conforms to AS 3776
- 100% magnaflux crack detection




Part	QFind	Size	WLL	BL	Dimensions				
					A (mm)	B (mm)	L (mm)	K (mm)	H (mm)
ULCL10PCL-06	C10CL6	6	1.4	5.6	14.0	8.5	61.5	44.5	7.0
ULCL10PCL-08	C10CL8	8	2.5	10.0	18.5	10.5	84.0	63.0	10.0
ULCL10PCL-10	C10CL10	10	4.0	16.0	23.0	12.6	96.2	71.0	12.6
ULCL10PCL-13	C10CL13	13	6.7	26.8	28.0	16.5	125.5	92.5	16.5
ULCL10PCL-16	C10CL16	16	10.0	40.0	33.5	20.0	146.5	106.5	20.0
ULCL10PCL-20	C10CL20	20	16.0	64.0	42.0	25.0	173.0	123.0	25.0



MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**

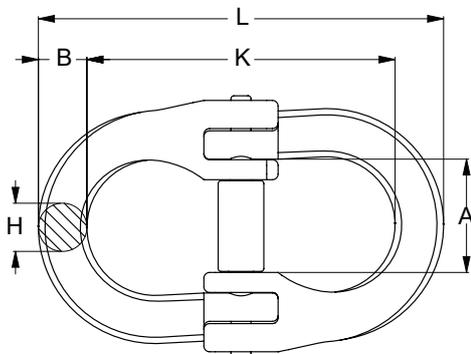

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

