

# DID YOU KNOW?


about our...



NEW  
PRODUCT

## Metal SDS Countersunk



### METAL SDS COUNTERSUNK CLASS 3 / AS 3566 / SQUARE DRIVE

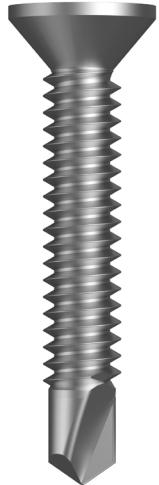

Part	QFind	Size	Length	Thread Length	Drill Point	Head Height	Head Ø	Drive Size
		Ø	L (mm)	T (mm)	DP (mm)	H (mm)	D (mm)	SQ
T9PM3CQ1016100	QT155	#10-16	100	89.5	6.5	4	9	#2
T9PM3CQ1016125	QT156	#10-16	125	114.5	6.5	4	9	#2
T9PM3CQ1024030	QT152	#10-24	30	19.5	6.5	4	9	#2
T9PM3CQ1024040	QT157	#10-24	40	29.5	6.5	4	9	#2
T9PM3CQ1024050	QT153	#10-24	50	39.5	6.5	4	9	#2
T9PM3CQ1024065	QT154	#10-24	65	54.5	6.5	4	9	#2

### APPLICATIONS

- Sheds
- Signage
- Gates and fences
- Wall cladding sheds
- Hinges into metal posts



### FEATURES

- Square drive for improved torque
- Class 3 coating suitable for outdoor use in C3 environments
- #10-16 for steel up to 3.5 mm thick
- #10-24 for steel up to 4.5 mm thick

# DRILLX®

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

[hobson.com.au](http://hobson.com.au) **QUALITY FASTENERS SINCE 1935**

