



PRODUCT DATA

Metal SDS Countersunk

Page 1 of 2

Self Drilling Screw (SDS) #06-20


Applications	
<ul style="list-style-type: none"> Light duty fixing Signage Hinges into metal posts 	

Material	 1022 C1022 Hardened
----------	---

Finish	 ZYP Zinc Yellow Passivate
--------	--

Pullout Values				
Plate (Purlin)	Metal Plate Thickness	¹ Mean Load	² Characteristic Load	³ Working Load
	(mm)	(N)	(N)	(N)
G550	0.5	750	550	200
G2	0.7	800	650	250
G2	1.2	1300	1200	450
G550	1.6	2500	2000	800

6 Gauge Countersunk Head

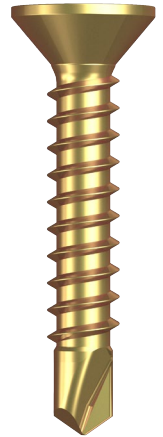

Drill Point Test					
Plate (Purlin)	Metal Plate Thickness	Load	Drill Speed	Drill Time	Drill Time
	(mm)	(kg)	(RPM)	(Max. individual) Seconds	(Max. average) Seconds
G450	1.5	18	2200	4.5	3

Mechanical Properties				
Torsional Strength	¹ Mean Tensile Strength	¹ Mean Shear Strength	² Characteristic Tensile Strength	² Characteristic Shear Strength
(Nm)	(N)	(N)	(N)	(N)
2.7	7400	4450	6400	3850

Note: 1000N = 1kN

¹ Mean Load/Strength is the average ultimate strength of samples tested.² Characteristic Load/Strength: 95% of these screws are expected to have a strength greater than the loads shown.³ Working Load is the governing minimum allowable load obtained by comparing relevant concrete and steel working loads. Factor of Safety (FOS=2.5 for steel, FOS=2.5 for timber and FOS=3.0 for concrete) are already included.

All values are obtained under laboratory conditions using DRILLX product. Safety factors should be considered for design purposes. Actual pullout loads may differ slightly depending on certain properties of the base material.



Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**




PRODUCT DATA


Metal SDS Countersunk

Page 2 of 2

Part	QFind	Gauge	TPI	Length	Thread Length	Drill Point Length	Head Height	Head ø	Drive Size	Pack Qty
				L (mm)	T (mm)	DP (mm)	H (mm)	D (mm)	PH (size)	
T9PMYCP0620020	QA12	6	20	20	13.4	4	2.6	7	Phillips #2	1000

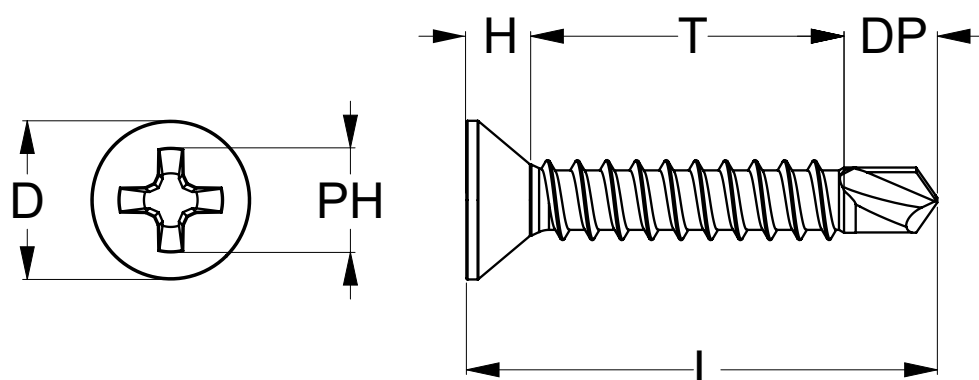

Installation

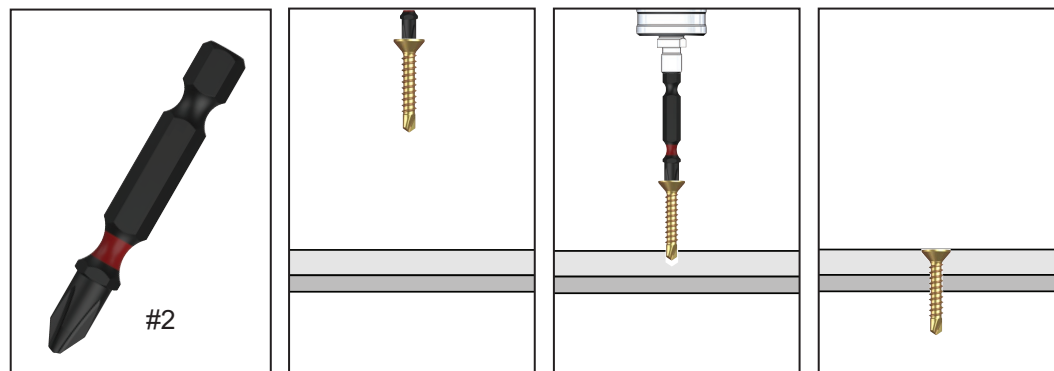

Recommended Phillips Size #2 Drive Bit:

Part	QFind	Length (mm)
TXDIPPHS20050	B316	50
TXDIPPHS20075	BA27	75
TXDIPPHS20100	B326	100
TXDIPPHS20150	B331	150

Installation Guide

1. Use a cordless screw driver set between 2,200-3,000 RPM. Fit the Phillips Drive Bit over the screw and place at the fastening position.
2. Apply consistently firm pressure to the screw driver while the screw is drilling.
3. Care should be taken not to over-tighten the screw.

*Installation with impact drivers not recommended.

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**