



PRODUCT DATA

Grade 80 Latch Hook with Swivel

Self-locking latch hook with swivel action assists with aligning the hook to the load line prior to lifting.

Applications	
<ul style="list-style-type: none"> Use with Grade 80 lifting components Lifting with chains, wire rope and synthetic slings 	
Material	Grade 80
Finish	Powder Coat




Features

- Conforms to AS 3776
- 100% magnaflux crack detection
- Safety hook prevents components from releasing if line becomes slack
- 360° swivel motion



Part	QFind	Size	WLL	BL	Dimensions									
					A	B	E	M	L1	L	N	C	H	
		(mm)	(tonne)	(tonne)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
ULHK08PAS-06	HAS6	6	1.12	4.48	33	33	24	69	138	168	16	11	19	
ULHK08PAS-08	HAS8	8	2.00	8.00	45	36	29	88	170	208	20	13	23	
ULHK08PAS-10	HAS10	10	3.15	12.60	53	42	31	105	207	254	23	16	30	
ULHK08PAS-13	HAS13	13	5.30	21.20	94	50	40	135	248	305	32	17	38	
ULHK08PAS-16	HAS16	16	8.00	32.00	68	61	45	161	295	367	38	22	45	
ULHK08PAS-20	HAS20	20	12.50	50.00	91	74	56	194	356	434	49	25	50	
ULHK08PAS-22	HAS22	22	15.00	60.00	101	97	70	224	441	536	55	33	62	

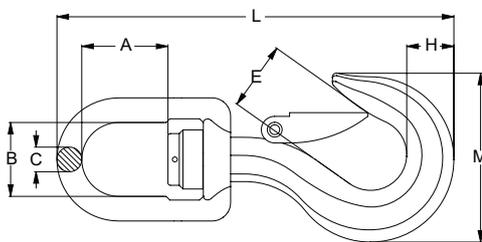

MARKINGS:

- CE (European Conformity)
- WLL (Working Load Limit)
- Trace Code (linked to certificate online)
- Manufacturer's mark



You can download this Test Certificate and/or Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

